

Spectrum Technology Platform Version 2019.1.0

Geocoding Guide for United States - REST

Table of Contents

1 - Er	nterprise	Geocoding
Modu	Jle	

Enterprise Geocoding Module 4

2 - GeocodeUSAddress

GeocodeUSAddress	27
Request	33
Response	66

3 - ReverseAPNLookup

ReverseAPNLookup	101
Request	103
Response	105

4 - ReverseGeocodeUSLocation

ReverseGeocodeUSLocation	125
Request	128
Response	134

5 - ReversePBKeyLookup

ReversePBKeyLookup	154
ReversePBKeyLookup Resource	156
Request	158
Response	160

6 - Geocode US Address Auxiliary Files

Auxiliary File Overview	179
Matching to Auxiliary Files	179
Auxiliary Match Output	181
Auxiliary File Layout	182

7 - Match and Location Codes for U.S. Geocoding

Match Codes	188
Location Codes	196

1 - Enterprise Geocoding Module

In this section

Enterprise Geocoding Module

4

Enterprise Geocoding Module

The Enterprise Geocoding Module performs address standardization, address geocoding, and postal code centroid geocoding. You can enter an address and get outputs such as geographic coordinates, which can be used for detailed spatial analysis and demographics assignment. You can also enter a geocode, a point represented by a latitude and longitude coordinate, and receive address information about the provided geocode.

Components

Enterprise Geocoding Module consists of the following stages. The specific stages you have depend on your license.

- **Geocode Global**—Takes an address in any supported country and returns latitude/longitude coordinates and other information. Geocode Address Global geocodes addresses only from countries you have licensed.
- **Geocode Address World**—Takes an address located in any of the supported countries and returns the city centroid or, for some countries, postal centroid. Geocode World cannot geocode to the street address level.
- Geocode US Address—Takes an input address and returns latitude/longitude coordinates and other address information.
- **GNAF PID Location Search**—Identifies the address and latitude/longitude coordinates for a Geocoded National Address File Persistent Identifier (G-NAF PID).
- **Reverse APN Lookup**—Takes an Assessor's Parcel Number (APN), Federal Information Processing Standards (FIPS) county code, and FIPS state code and returns the address of the parcel.
- **Reverse Geocode US Location**—Takes as input a geocode (latitude and longitude coordinate) and returns the address of the location.
- Reverse Geocode Global for all countries except USA.
- **Reverse pbKey Lookup**—Takes a pbKeyTM unique identifier as input and returns all standard returns that are provided as part of address matching.

Deprecated Components

The following stages have been deprecated:

- Geocode Address AUS— Use the Global Geocoding Module's Global Geocoding stage. Takes an address in Australia and returns latitude/longitude coordinates and other information. It also can geocode against a Geocoded National Address File Persistent Identifier point (G-NAF PID).
- Geocode Address GBR—Use the Global Geocoding Module's Global Geocoding stage. Takes an address in Great Britain and returns latitude/longitude coordinates and other information.

Enterprise Geocoding Databases

The following Enterprise Geocoding Module databases are installed on the Spectrum[™] Technology Platform server. Some of the databases are available by subscription from Pitney Bowes and are updated monthly or quarterly. Others are licensed from the USPS[®].

U.S. Geocoding Databases (U.S. Only)

These databases contain the spatial data necessary to perform address standardization and geocoding. You must install at least one of these databases to perform geocoding for USA. You set the database that you want to match against with the processing options. Enterprise Geocoding tries to match to the database you indicate. To verify you are matching to the database you want, you can review the value returned in the StreetDataType output field.

These databases use proprietary files called GSD files. For ZIP Code centroid matching, the file us.Z9 contains all the centroid info for all states and normally has a z9 extension.

- Centrus Enhanced Geocoding—This database consists of TIGER data provided by the U.S. Geological Survey and address data provided by the U.S. Postal Service.
- **TomTom Geocoding**—This database provides more up-to-date data than the Centrus Enhanced Geocoding database. It requires an additional license. This data is provided by TomTom, a third-party provider of spatial data, and postal data from the U.S. Postal Service.
- **HERE Geocoding**—This database provides more up-to-date data than the Centrus Enhanced Geocoding database. It requires an additional license. HERE data is provided by HERE, a third-party provider of spatial data. For more information about these databases, contact your sales representative.
- **ZIP + 4 Centroid**—This database provides only address standardization and ZIP + 4 centroid matching. It does not provide street-level matching.

Each geocoding database has an optional Statewide Intersections Index. The Statewide Intersection Index is designed to enable fast intersection identification on a statewide basis. For example, the Statewide Intersection Index will allow the database search for "1st and Main St, CO" and return a list of possible matches in Colorado more quickly than searching the entire geocoding database for each instance of the intersection.

U.S. Points Databases (U.S. Only)

Points databases contain data for locating the center of a parcel. These databases provides enhanced geocoding accuracy for internet mapping, property and casualty insurance, telecommunications, utilities, and others.

These databases are optional, but either Centrus Enhanced Points or Centrus Premium Points is required for Reverse Assessor's Parcel Number (APN) Lookup. These databases are also separately licensed.

• **Centrus Points**—This database contains the data necessary to locate the center of a parcel or building. It does not contain Assessor's Parcel Number (APN) or elevation data.

- **Centrus Elevation**—This database contains the same data as Centrus Points, plus elevation data.
- Centrus Enhanced Points—This database contains the same data as Centrus Points, plus APN data.
- **Centrus Premium Points**—This database contains the same data as Centrus Points, plus both APN and elevation data.
- HERE Points Database—The data in this database is provided by HERE, a third-party provider of spatial data.
- **TomTom Points Database**—The data in this database is provided by TomTom, a third-party provider of spatial data.
- **Master Location Data** This database provides the best available address point location for every mailable and deliverable address in the United States.

Reverse Geocoding Database (U.S. Only)

This database contains the data you need to convert a latitude/longitude location to an address.

This database is optional, but is required for ReverseGeocodeUS. This database is also separately licensed.

Auxiliary Files (U.S. Only)

Auxiliary files contain user-defined records. You can use auxiliary files to provide custom data to use in address matching and geocode matching.

DPV[®] Database (U.S. Only)

The Delivery Point Validation database allows you to check the validity of any individual mailing address in the U.S. The DPV database is distributed as an optional feature and can be installed to enhance the geocoding database's ability to validate mailing addresses. Each time an edition of the geocoding database is released, a corresponding edition of the optional DPV database is released. The date of the DPV database must match the date of the geocoding database for DPV processing to function. DPV lookups may not be performed after the expiration date of the DPV database.

This database is optional, but is required for CASS[™] processing. The DPV database is also required to determine ZIP + 4 and ZIP + 4 related output (DPBC, USPS record type, etc.). This database is also separately licensed.

Note:

Postal Service licensing prohibits using DPV for the generation of addresses or address lists, and also prohibits the DPV database being exported outside the United States.

EWS Database (U.S. Only)

The Early Warning System (EWS) database contains data that prevents address records from miscoding due to a delay in postal data reaching the U.S. Postal database.

The USPS[®] refreshes the EWS file on a weekly basis. Unlike the DPV and LACS^{Link} databases, the EWS database does not need to have the same date as the geocoding database. You can download the EWS.zip file free of charge from the CASS section of the USPS[®] RIBBS website at:

https://postalpro.usps.com/cass/EWS

When you download the EWS database, you will receive a file named OUT. You must rename the OUT file to EWS.txt before using it.

LACS ^{Link} Database (U.S. Only)

The LACS^{Link} database allows you to correct addresses that have changed as a result of a rural route address converting to street-style address, a PO Box renumbering, or a street-style address changing.

This database is optional, but is required for CASS[™] processing. The LACS^{Link} database is also required in CASS mode to receive ZIP + 4 and ZIP + 4 related output (delivery point bar code, USPS record type, etc.).

The date of the LACS^{Link} database must match the date of the geocoding database for LACS^{Link} processing to function.

Note:

USPS licensing prohibits using LACS^{Link} for the generation of addresses or address lists, and also prohibits the LACS^{Link} database being exported outside the United States.

International Geocoding Databases

International geocoding databases contain the spatial data necessary to perform address standardization and geocoding for locations outside the U.S. Each country has its own database, and some countries have optional databases that provide enhanced geocoding.

United Kingdom AddressBase Premium Database

AddressBase Premium is a point database sourced from Ordnance Survey[®], Royal Mail, and local authorities.

The AddressBase Premium database provides the highest level of precision, as reflected in S8 result codes. The database includes objects without postal addresses, such as subdivided properties, places of worship and community centers.

The AddressBase Premium database is built around the UPRN (Unique Property Reference Number). The UPRN is the unique identifier that provides a persistent reference to a unique property, regardless of changes in the property name, status, subdivision, use (such as from single occupancy to multiple occupancy) or demolition of the property. All historic, alternative, and provisional addresses are recorded against the same UPRN. The UPRN is returned with every AddressBase Premium candidate, except for Northern Ireland addresses.

Since the Ordnance Survey data source does not contain addresses for Northern Ireland, AddressBase Premium is supplemented with Royal Mail[®] postcode address data for Northern Ireland. This Northern Ireland data has postcode centroid (result code S3) precision only. For more information on the AddressBase Premium, see

https://www.ordnancesurvey.co.uk/business-and-government/help-and-support/products/addressbase-premium.html from Ordnance Survey.

United Kingdom CodePoint Database

The CodePoint Postal Address File (PAF) database provides postcode centroid geocoding. The CodePoint database is suitable for most applications involving address matching, validation, etc.

The CodePoint database is sourced from Royal Mail and covers street addresses for the UK (Great Britain and Northern Ireland). The CodePoint database is licensed for the entire dataset, rather than by region. The postcode centroid precision provided by the CodePoint database is reflected in S3 result codes.

For more information on the Royal Mail data source, see:

http://www.royalmail.com

Australia Geocoded National Address File (G-NAF)

This database provides enhanced geocoding for Australian addresses. This is the only authoritative Australian national index of locality, street and number, validated with geographic coordinates. It contains both officially recognized rural and urban addresses and unofficial addresses (aliases). Postal addresses and PO Boxes are not included. However, because some rural areas do not have adequate rural address information, roadside mail box (RMB) numbers, Lot numbers, and Block & Section numbers have been included in the G-NAF data set.

When you install this database there will be two subfolders:

- **GNAF123**—Contains the point-level dictionary. This has the highest precision of geocoding (characterized by Reliability Level 1, 2, or 3.)
- **GNAF456** —Contains the remainder of address information in G-NAF that does not meet high precision geocoding criteria (characterized by Reliability Level 4, 5, or 6.)

You must specify each of these as separate database resources in the Management Console.

We recommend that you use both databases to validate the existence of addresses but only use the GNAF123 for parcel-level geocoding. If you do not require parcel-level geocodes you can use the GNAF456 database for geocoding.

New Zealand Point Database

The New Zealand Point Database is based on postal point data which has a roof top precision point of each unique street address. Location X and Y returned for candidates from this database are roof top precision.

This data is maintained by the government authority, Land Information New Zealand.

Other Point Databases for International Countries

A number of other point databases are available for international countries. Refer to the quarterly data release notes for more information.

Adding an Enterprise Geocoding Module U.S. Database Resource

Whenever you install a new database resource or modify an existing database resource you must define it in Management Console in order for it to become available on your system. This procedure describes how to add or modify a U.S. database resource for the Enterprise Geocoding Module.

- 1. If you haven't already done so, install the dataset files on your system. For instructions on installing databases, see the *Spectrum[™] Technology Platform Installation Guide*.
- 2. In Management Console, under Resources, choose Spectrum Databases.
- 3. To create a new database resource, click the Add button +. To make changes to an existing database resource, select it, then click the Edit button . To delete a database resource, select it, then click the delete button :.
- 4. If you are creating a new database resource, on the **Add Database** page, enter a name for the database resource in the **Name** field. The name can be anything you choose. If you are creating a new database by copying an existing one, rename the default name as needed. You cannot modify the name of an existing database resource, because any services or jobs that reference the database resource by its original name would fail.

Note: If you are using the Enterprise Geocoding Module with the Siebel Module, name the U.S. geocoding database **KGDDatasource**.

5. In the **Pool size** field, specify the maximum number of concurrent requests you want this database to handle.

The optimal pool size varies by module. You will generally see the best results by setting the pool size between one-half to twice the number of CPUs on the server, with the optimal pool size for most modules being the same as the number of CPUs. For example, if your server has four CPUs you may want to experiment with a pool size between 2 (one-half the number of CPUs) and 8 (twice the number of CPUs) with the optimal size possibly being 4 (the number of CPUs).

- 6. In the Module field, select GeoStan. The Type field, US Geographic Coders, is selected by default.
- 7. To add a new dataset, under **Data Source**, click the Add button +. In the **Path** field, specify the folder that contains the dataset files. You can type in a path or click the Browse button to locate the dataset you need, then click **Ok**. You can include multiple dataset paths. This allows you to specify a single resource that includes both the primary dataset and any optional datasets you may have, such as DPV, LACS^{Link}, or elevation data.

For DPV and LACS^{Link} datasets, the interface provides Yes/No indicators on whether DPV and LACS^{Link} data are detected in any of the defined paths for the database resource.

If you have additional datasets to add, click the Add button +. To edit a dataset path, select the dataset, then click the Edit button . To remove a dataset, select the dataset, then click the delete button .

 If you have multiple datasets and want to reorder them, select a dataset and click the Up [↑] or Down ↓ button to move the file in the dataset list.

Note: The order of the datasets sets the priority of the dataset to use when a match is made to multiple same-level datasets; for example, a match made to 2 streets datasets. In this case, the dataset listed higher will be used.


10. When you are done with your changes, click **Save**.

Geocoding Concepts

Geocoding is the process of determining the latitude/longitude coordinates of an address. There are different ways that an address can be geocoded. In order of most accurate to least accurate, these methods are:

Point Level Matching

Point-level matching locates the center of the actual building footprint or parcel. This is the most accurate type of geocode and is used in industries such as internet mapping, insurance, telecommunications, and utilities.




Centerline matching is used with point-level matching to tie a point-level geocode with its parent street segment. This provides you with additional data about the parent street segment that is not retrievable using only the point-level match. The output information also includes the bearing from the point data geocode to the centerline match.

Street Matching

Street matching identifies the approximate location of an address on a street segment. In street matching, the location is determined by calculating the approximate location of a house number based on the range of numbers in the location's street. For example, if the address is on a street segment with a range of addresses from 50 to 99, then it is assumed that the house number 75 would be in the middle of the street segment. This method assumes that the addresses are evenly spaced along the street segment. As a result, it is not as exact as point matching since addresses may not be evenly distributed along a street segment.

For example, the following diagram shows the results of street-level matching along a segment with unevenly-spaced buildings. The first three buildings are fairly accurately geocoded because they


are evenly spaced. The fourth building, however, resides on a slightly larger parcel than the others along this street. Since street-level matching assumes that the buildings are evenly spaced, the result is that fourth, fifth, and sixth houses are not as precise as the first three. If you were to use point-level geocoding, the results would be more accurate.



Centroid Matching

ZIP Code centroid matching is a center point of an area defined by either a ZIP Code or a ZIP + 4, and is the least accurate type of geocode. A ZIP Centroid is the center of a ZIP Code; a ZIP + 4 centroid is the center of a ZIP + 4. Since a ZIP + 4 represents a smaller area than a ZIP Code, a ZIP + 4 centroid is more accurate than a ZIP Code centroid.

The following diagram illustrates centroid matching. All six houses would have the same ZIP Code geocode because they all reside in the same ZIP Code. The four houses located in the dashed area of the diagram would have the same ZIP + 4 centroid returned, whereas the two houses that are outside of the dashed area would not since they don't reside in the ZIP + 4 Code area.

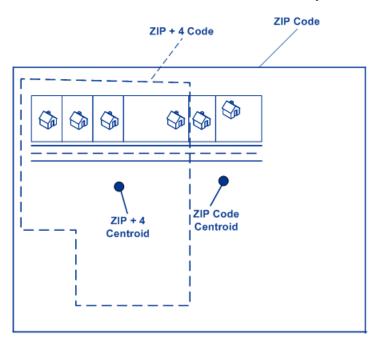

Using Master Location Data

Master Location Data (MLD) is a comprehensive, multi-sourced dataset that includes every known, addressable location in the United States. Because MLD is sourced from multiple data resources, it is a more complete universe of addresses than any single data source. A pbKey[™] unique identifier

is assigned to each physical addressable location within MLD, which allows users to more easily manage their address data and unlock a wealth of information linked to it.

Having a more complete universe of addresses available for matching results in an increase in high confidence address matches, and a decrease in false-positive matches. A false-positive match results when an incomplete input address is compared against an incomplete dataset, and the wrong match is returned because there is not enough information in either the input, or the matching dataset, to know that the address has been mismatched.

An example of this is an input address of "100 Main St". In one matching data source there may be only a "100 E Main St", and in another matching data source there may only be a "100 W Main St", even though both "100 W Main St" and "100 E Main St" are valid. In both cases, the "100 Main St" input address would match to the record in the matching data source, and there would be a high level of confidence that the match was correct because it was only compared against a single address in each data source. In both cases, it would be a false-positive match since the input of address "100 Main St" could mean either "100 E Main St", or "100 W Main St". However, in the case of MLD, since the addresses come from multiple sources, both "100 W Main St" and "100 E Main St" would exist in the matching data. In this case, a multiple match would be returned for the input address "100 Main St", rather than a false-positive match to either "100 W Main St", or "100 E Main St".

The premium matching confidence of MLD is further enhanced by the availability of more high-precision geocodes for the addressable locations included in the MLD dataset. MLD considers location information from multiple data sources to provide the highest precision geocode available for each address. This provides an increase in high-precision geocodes when compared with any single source.

Additional features with Master Location Data

Optional matching features:

- PBKey ZIP Centroid Locations
- Point of Interest matching

Optional geocoding feature:

• Expanded Centroids

Optional pbKey features:

- PBKey Fallback
- Reverse PBKey Lookup implemented as a resource in Enterprise Geocoding Module for USA.
- When matching addresses with Master Location Data (MLD), MLD Extended Attributes returns additional property information associated with an addressable location that has a pbKey, such as Assessor's Parcel Number (APN), Elevation, Address Type, Lot Size and more.

MLD Extended Attributes including APN and Elevation

(USA) This feature provides access to extended attributes associated with an addressable location that has a pbKey. When matching addresses with Master Location Data (MLD), Spectrum[™] Technology Platform returns additional property information associated with the address, such as

Assessor's Parcel Number (APN), Elevation, Address Type, and Lot Size. APN can be used to identify the parcel so the parcel ID can be linked to additional information for the insurance industry, such as property and insurance risk attributes. For more detail, see the full list of output fields below.

Requirements

The following are required to return MLD Extended Attributes:

- Master Location Data dataset.
- Streets dataset.
- MLD Extended Attributes dataset.
- Recommendation: the vintages of the MLD and MLD Extended Attributes datasets be within 4 months of each other.

MLD Extended Attributes Output Fields (optional)

Field	Description
ADDRTYPE	Address Type regarding number of units: S – Single unit M – Multiple units P – Post Office box X – Unknown
APN_ID	Assessor's parcel number.
INC_IND	Incorporated Place Indicator. I – Incorporated place N – Not an incorporated place X – Unknown
LOTSIZE	Lot size of the parcel expressed in square feet; 0 if none.
LOTSIZE_METERS	Lot size of the parcel expressed in square meters; 0 if none.
MEC_LAT	Latitude of Minimum Enclosing Circle expressed with an implied 6 digits of decimal precision; 0 if none.

Field	Description
MEC_LON	Longitude of Minimum Enclosing Circle expressed with an implied 6 digits of decimal precision; 0 if none.
MEC_RAD	Radius of Minimum Enclosing Circle (in square feet) expressed as a whole number. For example: 1234 means 1,234 feet.
MEC_RAD_METERS	Radius of Minimum Enclosing Circle (in meters) expressed with 1 digit of decimal precision.
PARCEN_ELEVATION	Elevation above sea level (in feet) expressed with 1 digit of decimal precision. For example: 12.5 feet.
RESBUS	Usage Indicator: R – Residential use B – Business use M – Mixed use – residential and business X – Unknown use
TFID	TIGER Face Identifier. This field can be used to match to all Census geocodes using external data; 0 if none.
PLACE	TIGER Place code; 0 if none.
UACE	TIGER Urban Area Identifier. Defines the urban area if any; 0 if none.
UACEPOP	Census population of the urban area; 0 if none.
URBANICITY	Urbanicity Indicator. An indicator that defines, according to the Census, the Urbanicity of the Address using TIGER UACE codes for categorization.

The pbKey[™] unique identifier

The pbKey is a unique identifier assigned to each physical addressable location within the Master Location Dataset. The pbKey is returned when a match is made to MLD. It is a 12-character (+1 null) field that has 'P' as the leading character, and is a persistent identifier for an address.

Use Cases

Some of the benefits provided by the pbKey include:

- Access to attribute data that provides additional information about an address such as demographics, proximity to hazards, availability of services and other property information.
- Improved efficiency in managing and maintaining consistent and accurate data for customer address lists.
- The ability to generate an address list of customers targeted for products and services based on specific attributes associated with their address.

The following sections provide more detailed information.

GeoEnrichment of Address Data

The pbKey[™] unique identifier serves as a lookup key with Pitney Bowes GeoEnrichment datasets to add attribute data for an address location. Depending on the GeoEnrichment dataset(s) you install, the attribute data can include property ownership, real estate, census, consumer expenditure, demographic, geographic, fire and flood protection, and/or telecommunication and wireless systems information and more. Some of these datasets return point location specific data, such as property ownership and real estate, whereas others provide polygonal-based data, for example, fire and flood protection, which can identify flood plains, wildfire or rating territories.

Address Master Data Management using ReversePBKeyLookup

To ensure the latest address information and most accurate locations are being used, businesses may regularly geocode their customer address list. There is a cost in terms of computing power to this intensive process, as well as a small chance of changes to the address match. Some businesses monitor these changes since it's integral to their business. Additionally, many businesses have multiple address databases across different business functions, and have the need for consistent representation of a single address across multiple systems and databases. ReversePBKeyLookup removes the need to re-geocode the address by using the pbKey[™] unique identifier rather than the address as input. The address together with latitude/longitude coordinates are returned. The ReversePBKeyLookup process is substantially faster and therefore less costly than using the address to retrieve this information. In addition, since a pbKey is persistent, there is no chance of matching to a different address.

Identifying addresses from GeoEnrichment data using ReversePBKeyLookup

The GeoEnrichment Module products are a variety of text-based data files that contain different attributes for each address in the Master Location Dataset. You can use the attributes in one or more of these GeoEnrichment datasets to identify customers for products or services based on those specific attributes. The lookup key for these products is the pbKey[™] unique identifier rather than the address. This allows you to easily link customers across multiple datasets if you need to consider attributes included in more than one GeoEnrichment dataset. For example, using Ground View Family Demographics Fabric, in conjunction with Property Attribute Fabric, you would be able to generate a list of pbKeys for records that represent young families, with 4 or more persons, in large houses, to target for specific products and services. Once records with the desired attributes

have been identified, the pbKeys from those records can be used to return the address and location information for those customers using ReversePBKeyLookup.

Optional matching features

PBKey ZIP Centroid Locations

The default behavior of Enterprise Geocoding Module for USA is to return matches from Master Location Data only for addressable locations that have an address-level geocode. ZIP Centroid returns are optionally available when matching to Master Location Data (MLD) in the Geocode US Address stage. For addresses that don't have a high-quality location, this provides access to the pbKeyTM unique identifier, which can be used to unlock additional information about an address using GeoEnrichment data, as well as to realize operational processing efficiencies. This allows us to ensure maximum address coverage and integrity in geocoding. The inclusion of these addresses enables us to provide a higher match rate, lower false-positive match rate, and access to the pbKeyTM unique identifier for all known addresses in the US.

In order to return ZIP centroids, you must add these files as database resources:

- Master Location Data
- zipsmld.gsd this is a file that contains the ZIP centroids.

To enable returning ZIP centroids, follow this procedure:

- 1. Go to the directory listed below. The *SpectrumDirectory* refers to the directory where you have installed the Spectrum[™] Technology Platform server.
 - On Windows: \SpectrumDirectory\server\modules\geostan\
 - On Unix/Linux: / SpectrumDirectory/server/modules/geostan/
- 2. Using a text editor, open the java.properties file.
- 3. Locate the Return pbKey Zip Centroids property.
- 4. Set egm.us.return.pbkey.zip.centroids=true. By default, this property is disabled (false).
- 5. Restart the Spectrum server.
- 6. Set the centroid preference to enable ZIP centroid returns: In the request to the GeocodeUSAddress resouce, set: Option.CentroidPreference=AddressUnavailable

Point of Interest matching

The optional Point Of Interest (POI) Index file (poi.gsi) included with Master Location Data and HERE Point Addresses provides expanded support in alias name matching. For more information, see **Building, Firm name and Point of Interest matching** on page 52.

Optional geocoding feature

Expanded Centroids

In some cases, more than one point-level geocode is available for an address matched in Master Location Data (MLD). For more information about the different types of point-level geocodes, see the "APnn" definitions in Address Location Codes on page 196. When more than one point-level

geocode is available from MLD data, only the highest quality geocode is returned with the matched address data.

The Expanded Centroids feature is available with MLD and the optional Master Location Structure Centroid Data Set (MLDB). If an address match is found in MLD, and the MLDB data set is added as a database resource, the MLDB data set is searched for additional geocodes for the matched address. If additional geocodes are found for the matched address, these are returned.

An Expanded Centroids match is indicated by an "A14" value for the IsAlias return field. The returned location code for an Expanded Centroids match will have an "APnn" value with a data type of "MASTER LOCATION".

Optional pbKey features

PBKey Fallback

When using PBKey Fallback, if an address match is not made to Master Location Data, but a match is made to a different dataset, the pbKey of the nearest MLD point located within the search distance is returned. To distinguish when a fallback pbKey is returned, the PBKey return value contains a leading character of "X" rather than "P", for example: X00001XSF1IF. Note, all of the other fields returned for the address match, including the geocode and all associated data returns, reflect the match results for the input address. The fallback pbKey can then be used for the lookup to the GeoEnrichment dataset(s), and the attribute data for the fallback location is returned for the match.

The relevance and accuracy of the returned attribute data using a PBKey Fallback location is highly dependent on the type of GeoEnrichment data, as well as the PBKey Fallback search distance. PBKey Fallback is intended for use with GeoEnrichment datasets that have polygonal-based data, rather than point-specific data. For example, the PBKey Fallback option may be suitable for determining the FEMA flood zone for a given location using the Flood Risk Pro GeoEnrichment dataset since it contains data that represents a polygonal region rather than a single coordinate. However, it is important to note that the accuracy of the returned data would very much depend on the size and nature of the individual polygonal features described in the GeoEnrichment data, combined with the search distance used to locate the nearest Master Location Data point. The search distance is configurable with an allowable search radius of 0-5280 feet and a default value of 150 feet.

The PBKey Fallback option is available in GeocodeUSAddress and ReverseGeocodeUSLocation. For more information, see Option.FIND_APPROXIMATE_PBKEY in Geocoding Options on page 40 for GeocodeUSAddress and Configuration Options on page 128 for ReverseGeocodeUSLocation.

ReversePBKeyLookup

ReversePBKeyLookup allows you to look up an address using a pbKeyTM unique identifier as input and returns all standard returns that are provided as part of address matching. For information about the use cases for ReversePBKeyLookup, see **Use Cases** on page 15.

Licensing

ReversePBKeyLookup requires a special license. There are two levels of licensing for ReversePBKeyLookup:

- Standard This license allows ReversePBKeyLookup of all of the standard MLD addresses.
- Enhanced This license allows ReversePBKeyLookup of a portion of MLD addresses that require an additional royalty due to address sourcing constraints.

Requirements

ReversePBKeyLookup includes these requirements:

- You have licensed, installed and added as a database resource the Master Location Dataset (DVDMLD and DVDMLD2).
- You have licensed, installed and added as a database resource the DVDMLDR dataset.
- The MLD and DVDMLDR datasets must be the same vintage.

ReversePBKeyLookup Search Results

When using ReversePBKeyLookup, the search results can return zero to many MLD point address variations that match the input PBKey. There will be no matches returned if the given PBKey is not found. While many PBKeys map to a single point-level address, some PBKeys map to multiple point address variations. Getting multiple point address variations from one PBKey can occur in two circumstances:

- 1. Alias matches. Some streets are known by their common name and one to many aliases. In this case, MLD may contain all variations of street names. An example of multiple alias match returns for an input PBKey (P00008BCG8WM) is shown below:
 - AP02. Normal match (non-alias). 1206 W 600 S, FOUNTAINTOWN, IN 46130-9409

Note: For the alias match results below, the alias addresses are represented; however, the address returned is the normal match address: 1206 W 600 S. The value returned in the isAlias field will indicate an alias match result.

- AP02. Alias match. 1206 W 1200 N, FOUNTAINTOWN, IN 46130-9409
- AP02. Alias match. 1206 W COUNTY ROAD 1200 N, FOUNTAINTOWN, IN 46130-9409
- AP02. Alias match. 1206 W COUNTY ROAD 600 S, FOUNTAINTOWN, IN 46130-9409
- 2. Multi-unit buildings with/without units. In some cases, there are multi-unit addresses without individual unit address records. In this case, you may see multiple address records returned for the same input PBKey, some without unit designations and others with ranged unit designations. In the case of multi-unit addresses that have individual suite/unit number address designations, each will have their own distinct PBKey. The following example shows address results for a PBKey that maps to a building with and without units, which share the same PBKey/location (P00003PZZOIE):

• AP02. Normal match (non-alias). 4750 WALNUT ST, BOULDER, CO 80301-2532

- AP02. Normal match (non-alias). 4750 WALNUT ST STE 100-103, BOULDER, CO 80301-2532
- AP02. Normal match (non-alias). 4750 WALNUT ST STE 205-205, BOULDER, CO 80301-2532
- AP02. Normal match (non-alias). 4750 WALNUT ST, BOULDER, CO 80301-2538

ReversePBKeyLookup Return Codes and Match Codes

The table below lists the Return Codes and Match Codes returned when using ReversePBKeyLookup.

License	Input PBKey	Point Results	Match Code
Enhanced	Found	One Enhanced	V000
Enhanced	Found	Multiple Standard and/or Enhanced	V001
Enhanced	Not Found	None	E040
Standard	Found	One Standard	V000
Standard	Found	Multiple Standard	V001
Standard	Found	One Standard, some Enhanced	V002
Standard	Found	Multiple Standard, some Enhanced	V003
Standard	Found	All Enhanced	E041
Standard	Not Found	None	E040
No license	Not applicable	Not applicable	E000

Geocoding Match Strategies for Non-U.S. Locations

The Enterprise Geocoding Module offers a variety of options for controlling geocoding precision and match rate. The following information describes different approaches for matching which you can apply to any country geocoder except the U.S. geocoder (GeocodeUSAddress), which has a different set of options.

Maximizing the Match Rate

To generate the highest match rate possible, do not specify house number, street, and city/locality.

Another way to maximize the match rate is by setting. This means that the geocoder will fall back to the four-digit postcode centroid if a close street level match cannot be made. While this scenario might yield false positives, it may be the best matching solution when you have large databases to geocode.

You should evaluate if the percentage of false positives will affect your analysis. To reduce the number of false positives without sacrificing hit rate, analyze the result codes after a geocoding session and adjust your settings accordingly.

Maximizing Precision

If your analysis requires highly precise geocoded addresses, choose a strategy in which the geocoder returns the maximum percentage of high precision geocodes and the lowest number of imprecise matches (false positives). To do this, use the to require close matches to match on all address elements. Also, set .

This technique may produce a lower percentage match rate, but will provide the best precision.

Balancing Match Rate and Precision

You may want to use a balanced strategy between match rate and geographic precision. That is, you may want to geocode as many records as possible automatically, but at the same time want to minimize the number of weaker matches (false positives). For example, false positives can occur when the geocoder:

- finds a street that sounds like the input street.
- finds the same street in another city (if postal code match is not required).
- finds the street but with a different house number (if house number is not required).

The following settings may achieve a good balance between match rate and precision:

- CloseMatchesOnly—Specify "Y".
- · MustMatchHouseNumber—Specify "Y".
- MustMatchStreet—Specify "Y".
- FallbackToPostal—Specify "N".

Postal Concepts

The following sections contain information about postal concepts used by the Enterprise Geocoding Module.

Note: This section and the topics of Locatable Address Conversion System, Delivery Point Validation, and Early Warning System are relevant to USA geocoding only.

Dual Addresses

GeocodeUSAddress can process input that contains two addresses for the same record on the same address line. For example, GeocodeUSAddress can process the following input address:

3138 HWY 371 PO BOX 120 PRESCOTT AR 71857

GeocodeUSAddress does not recognize dual addresses where the two addresses are both street addresses. For example, GeocodeUSAddress does NOT recognize 135 Main St 4750 Walnut St Ste 200. GeocodeUSAddress does recognize dual addresses where the two addresses are the same type of address but are not street addresses. For example, GeocodeUSAddress does recognize PO BOX 12 PO BOX 2000.

After GeocodeUSAddress parses the dual address, it searches for a match. GeocodeUSAddress determines which address has preference for a match based on the processing mode. In CASS mode, GeocodeUSAddress ignores the prefer PO Box and prefer street options, and attempts to find a match based on the following order: PO Box, Street, Rural Route, and General Delivery. In Relaxed mode, GeocodeUSAddress recognizes the Address Preference (AddressPreference) input option.

Note: GeocodeUSAddress does not perform dual address processing in Exact and Close mode. GeocodeUSAddress does not perform dual address processing on multi-line addresses.

Locatable Address Conversion System (LACS)

The USPS[®] Locatable Address Conversion System (LACS) corrects addresses that have changed as a result of a rural route address converting to street-style address, a PO Box renumbering, or a street-style address changing. The following are examples of LACS^{Link} conversions:

- Rural Route Converted to Street-Style Address: Old Address: RR 3 Box 45 New Address: 1292 North Ridgeland Drive
- Street Renamed and Renumbered: Old Address: 23 Main Street New Address: 45 West First Avenue
- PO Box Renumbered: Old Address: PO Box 453 New Address: PO Box 10435

LACS^{Link} is required for CASS processing.

Delivery Point Validation (DPV)

Delivery Point Validation (DPV[®]) is a United States Postal Service[®] (USPS[®]) technology that validates the accuracy of address information down to the individual mailing address. By using DPV[®] to validate addresses, you can reduce undeliverable-as-addressed (UAA) mail, thereby reducing postage costs and other business costs associated with inaccurate address information.

Note: $DPV^{\mathbb{R}}$ is only available for U.S. addresses.

Without DPV[®], the address validation process only verifies that an individual address is within a range of valid addresses for the given street. For example, the USPS data indicates that the range of addresses on Maple Lane is 500 to 1000. You attempt to validate an address of 610 Maple Ln. Without DPV[®], this address would appear to be valid because it is in the range of 500 to 1000. However, in reality the address 610 Maple Ln does not exist: the house numbers in this section of the street are 608, 609, 613, and 616. With DPV[®] processing, you would be alerted to the fact that 610 Maple Ln does not exist and you could take action to correct the address.

DPV[®] also provides unique address attributes to help produce more targeted mailing lists. For example, DPV[®] can indicate if a location is vacant and can identify commercial mail receiving agencies (CMRAs) and private mail boxes.

Although DPV[®] can validate the accuracy of an existing address, you cannot use DPV[®] to create address lists. For example, you can validate that 123 Elm Street Apartment 6 exists, but you cannot ask if there is an Apartment 7 at the same street address. To prevent the generation of address lists, the DPV[®] database contains false positive records. False positive records are artificially manufactured addresses that reside in a false positive table. For each negative response that occurs in a DPV[®] query, a query is made to the false positive table. A match to this table will stop DPV[®] processing.

Encountering False Positives

What is a False-Positive?

To prevent the generation of address lists, the DPV and LACS^{Link} databases include false-positive records. False-positive records are artificially manufactured addresses that reside in a false-positive table. For each negative response that occurs in a DPV or LACS^{Link} query, a query is made to the false-positive table. A match to this table (called a false-positive match) disables your DPV or LACS^{Link} key. In batch processing the job that contains the violation will complete successfully but you will not be able to run any subsequent jobs that use DPV or LACS^{Link} until you report the violation and obtain a key to reactivate DPV or LACS^{Link}.

Note: The term "seed record violation" is also used to refer to encountering false positive records. The two terms mean the same thing.

Reporting DPV False-Positive Violations

Spectrum[™] Technology Platform indicates a false-positive match via messages in the server log.

You can report the violation and obtain a restart key by following these steps.

- 1. In your browser, go to http://<yourserver>:<port>/<product code>/dpv.jsp. For example, http://localhost:8080/unc/dpv.jsp for the Universal Addressing Module and http://localhost:8080/geostan/dpv.jsp for the Enterprise Geocoding Module.
- 2. Enter the mailer's information into each field. The number in parentheses after each field name indicates the maximum length of the field.
- 3. Click Submit when you're done. A File Download dialog will appear.
- 4. Click Save to save the file to your computer. A Save As dialog will appear.

- 5. Specify a file name and location on your local hard drive (for example c:\DPVSeedFile.txt) and click **Save**.
- Review the appropriate USPS information. For a DPV seed violation, review the USPS DPV Product Licensee Performance Requirements document at https://postalpro.usps.com/DPV_LPR.
- 7. Call Pitney Bowes Technical Support.

DPV False Positive Header File Layout

The USPS[®] has determined the required layout of the DPV false-positive header file, which is currently defined as a fixed-length file containing two or more 180-byte records. The first record must always be the header record, whose layout is shown below.

Position	Length	Description	Format
1-40	40	Mailer's company name	Alphanumeric
41-98	58	Mailer's address line	Alphanumeric
99-126	28	Mailer's city name	Alphanumeric
127-128	2	Mailer's state abbreviation	Alphabetic
129-137	9	Mailer's 9-digit ZIP Code	Numeric
138-146	9	Total Records Processed	Numeric
147-155	9	Total Records DPV Matched	Numeric
156-164	9	Percent Match Rate to DSF	Numeric
165-173	9	Percent Match Rate to ZIP + 4 [®]	Numeric

Table 1: DPV False-Positive Header Record Layout

Position	Length	Description	Format
174-178	5	Number of ZIP Codes on file	Numeric
179-180	2	Number of False-Positives	Numeric

The trailer record contains information regarding the DPV false-positive match. There must be one trailer record added to the false-positive file for every DPV false-positive match. The layout is shown below.

Position	Length	Description	Format
1-2	2	Street predirectional	Alphanumeric
3-30	28	Street name	Alphanumeric
31-34	4	Street suffix abbreviation	Alphanumeric
35-36	2	Street postdirectional	Alphanumeric
37-46	10	Address primary number	Alphanumeric
47-50	4	Address secondary abbreviation	Alphanumeric
51-58	8	Address secondary number	Numeric
59-63	5	Matched ZIP Code	Numeric
64-67	4	Matched ZIP + 4 [®]	Numeric

Position	Length	Description	Format
68-180	113	Filler	Spaces

Reporting LACS/Link False-Positive Violations

Spectrum[™] Technology Platform indicates a false-positive match via messages in the server log. Batch jobs will fail if a false-positive match occurs and client/server calls will throw an exception.

Note: The term "seed record violation" is also used to refer to encountering false positive records. The two terms mean the same thing.

- 1. In your browser, go to http://<ServerName>:<port>/<product code>/lacslink.jsp. For example, http://localhost:8080/unc/lacslink.jsp for the Universal Addressing Module and http://localhost:8080/geostan/lacslink.jsp for the Enterprise Geocoding Module.
- 2. Enter the mailer's information into each field. The number in parentheses after the field name indicates the maximum length of the field. Click **Submit** when you're done. A **File Download** dialog will appear.
- 3. Click Save to save the file to your computer. A Save As dialog will appear.
- 4. Specify a file name and location on your local hard drive (for example c:\lacslink.txt) and click **Save**.
- 5. Review the appropriate USPS information. For a LACS^{Link} seed violation, review the LACS^{Link} End User Licensee Performance Requirements document at https://postalpro.usps.com/LL_EU_LPR.
- 6. Call Pitney Bowes Technical Support.

Early Warning System (EWS)

The Early Warning System (EWS) provides up-to-date address information for new and recently changed addresses that have not yet been updated in the monthly USPS database. EWS prevents address records from miscoding due to a delay in postal data reaching the USPS[®] databases.

The older the U.S. Postal Database, the higher potential you have for miscoding addresses. When a valid address is miscoded because the address it matches to in the U.S. Postal Database is inexact, it will result in a broken address.

EWS data consists of partial address information limited to the ZIP Code[™], street name, predirectional, postdirectional, and a suffix. For an address record to be EWS-eligible, it must be an address not present on the most recent monthly production U.S. Postal Database.

The USPS[®] refreshes the EWS file on a weekly basis. You can download the EWS file from the USPS[®] website at https://postalpro.usps.com/cass/EWS.

2 - GeocodeUSAddress

GeocodeUSAddress takes an address and returns latitude/longitude coordinates. GeocodeUSAddress also standardizes and validates addresses using data from the U.S. Postal Service.

GeocodeUSAddress can also geocode intersections. Instead of entering a mailing address, you can enter and intersection such as "Pearl St. and 28th" and obtain the coordinates of the intersection.

GeocodeUSAddress is part of the Enterprise Geocoding Module. For more information about the Enterprise Geocoding Module, see Enterprise Geocoding Module on page 4.

In this section

GeocodeUSAddress	27
Request	33
Response	66

GeocodeUSAddress

Resource URL

JSON endpoint:

http://server:port/rest/GeocodeUSAddress/results.json

XML endpoint:

```
http://server:port/rest/GeocodeUSAddress/results.xml
```

Example with JSON Response

The following example requests a JSON response:

```
http://myserver:8080/rest/GeocodeUSAddress/results.json?
Data.AddressLine1=3001+Summer+St&Data.City=Stamford&Data.StateProvince=CT
```

The JSON returned by this request would be:

```
{"output port": [{
  "BlockSuffix": "",
  "CBSADivisionCode": "",
  "CBSAMetro": "Y",
  "CBSACode": "14860",
  "CensusBlockID": "090010212002010",
  "USFIPSCountyNumber": "001",
  "CSACode": "408",
  "CensusTract": "021200",
  "USFIPSStateCode": "09",
  "USFIPSStateCountyCode": "09001",
  "Latitude": "41.071067",
  "Longitude": "-73.549161",
  "StreetSide": "R",
  "BlockLine1": ""
  "BlockLine2": ""
  "BlockLine3": "",
  "BlockLine4": "",
  "BlockLine5": "",
  "BlockLine6": "",
  "FirmName": "Stamford Square",
  "AddressLine1": "3001 Summer St",
  "AddressLine2": "",
  "LastLine": "Stamford, CT 06905-4317",
  "StreetName": "Summer",
  "CrossStreetName": "",
```

```
"LeadingDirectional": "",
"CrossStreetLeadingDirectional": "",
"HouseNumber": "3001",
"HouseNumber2": "",
"TrailingDirectional": "",
"CrossStreetTrailingDirectional": "",
"StreetSuffix": "St",
"CrossStreetSuffix": "",
"ApartmentLabel": "",
"ApartmentLabel2": "",
"ApartmentNumber": "",
"ApartmentNumber2": "",
"AdditionalInputData": "",
"City": "Stamford",
"StateProvince": "CT",
"PostalCode.Base": "06905",
"PostalCode.AddOn": "4317",
"PostalCode": "06905-4317",
"PrivateMailbox.Designator": "",
"PrivateMailbox": "",
"USUrbanName": "",
"Country": "United States of America",
"RRHC": "",
"USCarrierRouteCode": "C006",
"USBCCheckDigit": "7",
"PostalBarCode": "431799",
"DeliveryPointCode": "99",
"GovernmentBuilding": "",
"USLOTCode": "0012A",
"USCarrierRouteSort": "B",
"USCityDelivery": "Y",
"PostalCodeClass": "",
"PostalFacility": "P",
"PostalCodeUnique": "",
"CityStateRecordName": "Stamford",
"CityPreferredName": "Stamford",
"CityShortName": "Stamford",
"DPV": "D",
"DPVFootnote": "AAN1",
"CMRA": "N",
"Alternate": "B",
"HouseNumberHigh": "3001",
"HouseNumberLow": "3001",
"HouseNumberParity": "O",
"UnitNumberHigh": "",
"UnitNumberLow": "",
"UnitNumberParity": "",
"PostalCodeExtensionHigh": "4317",
"PostalCodeExtensionLow": "4317",
"AddressLineResolved": "",
"EWSMatch": "",
"RecordType.Default": "Y",
"Intersection": "F",
```

```
"IsAlias": "N01",
  "LACSAddress": "",
  "LocationCode": "AS0",
  "MatchCode": "S90",
  "RecordType": "HighRise",
  "GeoStanMatchScore": "0.0000000",
  "CountryLevel": "A",
  "StreetDataType": "TOMTOM",
  "StreetDataCode": "2",
  "DatabaseVersion": "July 2015",
  "ExpirationDate": "11/27/2015"
  "BlockLeft": "090010213001010",
  "BlockRight": "090010212002010",
  "BlockSuffixLeft": "",
  "BlockSuffixRight": "",
  "RoadClass": "00",
  "SegmentDirection": "F",
  "SegmentHouseNumberHigh": "3001",
  "SegmentHouseNumberLow": "2988",
  "SegmentCode": "72822",
  "SegmentLength": "",
  "SegmentParity": "R"
  "PointCode": "",
  "Confidence": "89",
  "ProcessedBy": "KGL",
  "Geocoder.MatchCode": "S5HPNTSCZA",
  "IsCloseMatch": "Y",
  "GeoConfidenceCode": "ADDRESS",
  "GeoConfidenceCentroidLatitude": "41.071067",
  "GeoConfidenceCentroidLongitude": "-73.549161",
  "PBKey": "",
  "Status": "",
  "Status.Code": "",
  "Status.Description": "",
  "StreetSegmentPoints": [{"SegmentPoints":
                                                ſ
         "Latitude": "41.071051",
         "Longitude": "-73.549348"
      },
            {
         "Latitude": "41.071117",
         "Longitude": "-73.549338"
      }
  ]}],
  "user fields": []
}]}
```

Example with XML Response

The following example requests an XML response:

```
http://myserver:8080/rest/GeocodeUSAddress/results.xml?
Data.AddressLine1=3001+Summer+St&Data.City=Stamford&Data.StateProvince=CT
```

The XML returned by this request would be:

```
<xml.GeocodeUSAddressResponse</pre>
xmlns="http://www.pb.com/spectrum/services/GeocodeUSAddress">
   <output port>
      <Address>
         <BlockSuffix/>
         <CBSADivisionCode/>
         <CBSAMetro>Y</CBSAMetro>
         <CBSACode>14860</CBSACode>
         <CensusBlockID>090010212002010</CensusBlockID>
         <USFIPSCountyNumber>001</USFIPSCountyNumber>
         <CSACode>408</CSACode>
         <CensusTract>021200</CensusTract>
         <USFIPSStateCode>09</USFIPSStateCode>
         <USFIPSStateCountyCode>09001</USFIPSStateCountyCode>
         <Latitude>41.071067</Latitude>
         <Longitude>-73.549161</Longitude>
         <StreetSide>R</StreetSide>
         <BlockLine1/>
         <BlockLine2/>
         <BlockLine3/>
         <BlockLine4/>
         <BlockLine5/>
         <BlockLine6/>
         <FirmName>Stamford Square</FirmName>
         <AddressLine1>3001 Summer St</AddressLine1>
         <AddressLine2/>
         <LastLine>Stamford, CT 06905-4317</LastLine>
         <StreetName>Summer</StreetName>
         <CrossStreetName/>
         <LeadingDirectional/>
         <CrossStreetLeadingDirectional/>
         <HouseNumber>3001</HouseNumber>
         <HouseNumber2/>
         <TrailingDirectional/>
         <CrossStreetTrailingDirectional/>
         <StreetSuffix>St</StreetSuffix>
         <CrossStreetSuffix/>
         <ApartmentLabel/>
         <ApartmentLabel2/>
         <ApartmentNumber/>
         <ApartmentNumber2/>
         <AdditionalInputData/>
         <City>Stamford</City>
         <StateProvince>CT</StateProvince>
```

```
<PostalCode.Base>06905</PostalCode.Base>
<PostalCode.AddOn>4317</PostalCode.AddOn>
<PostalCode>06905-4317</PostalCode>
<PrivateMailbox.Designator/>
<PrivateMailbox/>
<USUrbanName/>
<Country>United States of America</Country>
<RRHC/>
<USCarrierRouteCode>C006</USCarrierRouteCode>
<USBCCheckDigit>7</USBCCheckDigit>
<PostalBarCode>431799</PostalBarCode>
<DeliveryPointCode>99</DeliveryPointCode>
<GovernmentBuilding/>
<USLOTCode>0012A</USLOTCode>
<USCarrierRouteSort>B</USCarrierRouteSort>
<USCityDelivery>Y</USCityDelivery>
<PostalCodeClass/>
<PostalFacility>P</PostalFacility>
<PostalCodeUnique/>
<CityStateRecordName>Stamford</CityStateRecordName>
<CityPreferredName>Stamford</CityPreferredName>
<CityShortName>Stamford</CityShortName>
<DPV>D</DPV>
<DPVFootnote>AAN1</DPVFootnote>
<CMRA>N</CMRA>
<Alternate>B</Alternate>
<HouseNumberHigh>3001</HouseNumberHigh>
<HouseNumberLow>3001</HouseNumberLow>
<HouseNumberParity>O</HouseNumberParity>
<UnitNumberHigh/>
<UnitNumberLow/>
<UnitNumberParity/>
<PostalCodeExtensionHigh>4317</PostalCodeExtensionHigh>
<PostalCodeExtensionLow>4317</PostalCodeExtensionLow>
<AddressLineResolved/>
<EWSMatch/>
<RecordType.Default>Y</RecordType.Default>
<Intersection>F</Intersection>
<IsAlias>N01</IsAlias>
<LACSAddress/>
<LocationCode>AS0</LocationCode>
<MatchCode>S90</MatchCode>
<RecordType>HighRise</RecordType>
<GeoStanMatchScore>0.0000000</GeoStanMatchScore>
<CountryLevel>A</CountryLevel>
<StreetDataType>TOMTOM</StreetDataType>
<StreetDataCode>2</StreetDataCode>
<DatabaseVersion>July 2015</DatabaseVersion>
<ExpirationDate>11/27/2015</ExpirationDate>
<BlockLeft>090010213001010</BlockLeft>
<BlockRight>090010212002010</BlockRight>
<BlockSuffixLeft/>
<BlockSuffixRight/>
```

```
<RoadClass>00</RoadClass>
<SegmentDirection>F</SegmentDirection>
<SegmentHouseNumberHigh>3001</SegmentHouseNumberHigh>
<SegmentHouseNumberLow>2988</SegmentHouseNumberLow>
<SegmentCode>72822</SegmentCode>
<SegmentLength/>
<SegmentParity>R</SegmentParity>
<PointCode/>
<Confidence>89</Confidence>
<ProcessedBy>KGL</ProcessedBy>
<Geocoder.MatchCode>S5HPNTSCZA</Geocoder.MatchCode>
<IsCloseMatch>Y</IsCloseMatch>
<GeoConfidenceCode>
```

<GeoConfidenceCentroidLatitude>41.071067</GeoConfidenceCentroidLatitude>

<GeoConfidenceCentroidLongitude>-73.549161</GeoConfidenceCentroidLongitude>

```
<StreetSegmentPoints>
            <StreetSegments>
               <SegmentPoints>
                  <SegmentPoint>
                     <Latitude>41.071051</Latitude>
                     <Longitude>-73.549348</Longitude>
                  </SegmentPoint>
                  <SegmentPoint>
                     <Latitude>41.071117</Latitude>
                     <Longitude>-73.549338</Longitude>
                  </SegmentPoint>
               </SegmentPoints>
            </StreetSegments>
         </StreetSegmentPoints>
         <PBKey/>
         <Status/>
         <Status.Code/>
         <Status.Description/>
         <user fields/>
      </Address>
   </output_port>
</xml.GeocodeUSAddressResponse>
```

Request

Input

GeocodeUSAddress takes an address as input. To obtain the best performance with GeocodeUSAddress and the most possible matches, your input address should be as complete as possible and free of misspellings and incomplete information. Input addresses should be as close to USPS standards as possible for the highest match rate. For information about USPS standards, see the USPS website http://www.usps.com.

Input addresses should contain a street address line and a lastline, or a single line with both address and lastline elements. This helps GeocodeUSAddress accurately identify an area in which to search for a match candidate, based on the city, state, and ZIP Code. However, matching can still be performed in cases where only a city is input in the lastline rather than a full lastline containing the city, state and ZIP Code elements. For more information, see **City-only Lastline Matching** on page 38.

GeocodeUSAddress also accepts a street address line with individual city, state, and ZIP Code lines instead of a last line. You should only use this type of input if you are confident that the input address is free of misspellings and incomplete information.

If you are using Geocode US Address for address standardization, input addresses must have at least a street name, and either a city and state or a ZIP Code to obtain a match. If you are using Geocode US Address to obtain geocoding information, input addresses only need to contain a ZIP + 4 Code to receive geocoding information.

The following table summarizes the address formats and input address field(s) used for each address matching methodology.

Address Matching Methodology	Address Format	Notes
Standard Input	Data.AddressLine1	
	Data.AddressLine2	Optional.
	Data.LastLine Or Data.City, Data.State,Data.PostalCode	

Address Matching Methodology	Address Format	Notes
Single-line	Data.AddressLine1	Contains address elements in a single line. The minimum information required in the last line component is a ZIP Code or a valid city and state combination.
City-only Lastline	Data.AddressLine1	
	Data.AddressLine2	Optional.
	Data.LastLine or Data.City	Contains only the city.
Multi-line		The address elements are separated into multiple lines. Recommended only for use with free-form address data entry.
		Important: The multi-line format cannot use the Data.LastLine field or the parsed last line element fields: Data.City, Data.State, Or Data.PostalCode.
	Data.AddressLine1	
	Data.AddressLine2	
	Data.AddressLine3	
	Data.AddressLine4	Optional.
	Data.AddressLine5	Optional.
	Data.AddressLine6	Optional.

The following table provides information about the format and layout of GeocodeUSAddress input.

GeocodeUSAddress Input Data

Parameter	Format	Description
Data.AddressLine1	String	The first address line or a street intersection.
		To specify a street intersection, use and, &, at, or @. For example, PEARL & 28th. GeocodeUSAddress does not match intersections when processing in CASS mode.
		You may enter an address range instead of an individual address number. For example, 10-12 FRONT ST. For additional information, see Address Range Matching on page 38.
Data.AddressLine2	String	The second address line or a street intersection.
		To specify a street intersection, use and, &, at, or @. For example, PEARL & 28th. GeocodeUSAddress does not match intersections when processing in CASS mode.
Data.AddressLine2	String	Third address line.
Data.AddressLine4	String	Fourth address line.
Data.AddressLine5	String	Fifth address line.
Data.AddressLine6	String	Sixth address line.
Data.City	String	The name of the municipality, such as a city or town.
		Note: If there is any data in the input fields AddressLine3, AddressLine4, AddressLine5, or AddressLine6, GeocodeUSAddress will ignore data in the City input field.
Data.FirmName	String	The name of a business. The geocoding process attempts to match the input firm name to the recognized firm names in the USPS data for a higher quality match. If the firm name is not in the USPS data, the firm name is ignored when matching and is returned with the output.
Data.LastLine	String	The last line of an address containing the city, state, and ZIP Code.

Parameter	Format	Description
Data.Latitude	String	Input latitude for matching using the Predictive Lastline feature. The required input format is an integer value; for example, 40018301. Decimal is not a valid input format. For more information, see Predictive Lastline on page 39.
Data.Longitude	String	Input longitude for matching using the Predictive Lastline feature. The required input format is an integer value; for example: -105240976. Decimal is not a valid input format. For more information, see Predictive Lastline on page 39.
Data.PostalCode	String	The 5-digit ZIP Code or the 9-digit ZIP + 4 code.
		Note: If there is any data in the input fields AddressLine3, AddressLine4, AddressLine5, or AddressLine6, GeocodeUSAddress will ignore data in the PostalCode input field.
Data.StateProvince	String	The name or abbreviation of the state.
		Note: If there is any data in the input fields AddressLine3, AddressLine4, AddressLine5, or AddressLine6, GeocodeUSAddress will ignore data in the StateProvince input field.

How GeocodeUSAddress Processes Addresses

GeocodeUSAddress processes addresses in the following order:

1. Parses the address elements.

GeocodeUSAddress parses input address data into single elements. Parsing occurs on data in the order in which you load the data. Even if a valid address is missing an element, GeocodeUSAddress can find a match. Some elements, such as predirectionals, may not be critical elements of some addresses. By comparing an address as input against all known addresses in a search area, GeocodeUSAddress can usually determine if any of these elements are missing or incorrect.

2. Finds possible matches within the search area.

GeocodeUSAddress uses the last line elements of an address to determine a search area. You can specify if you want the search area based on a finance area or on an area defined by the city, state, and ZIP Code. (A Finance Area is a collection of ZIP Codes within a contiguous

geographic region.) If the city and state are not in the ZIP Code, GeocodeUSAddress performs separate searches for the ZIP Code and city.

After GeocodeUSAddress has determined the search area, it tries to match the elements from the street address line to the records in the standardized data files and does the following:

- Checks input address ranges for missing or misplaced hyphens, and alpha-numeric ranges for proper sequence.
- Searches for any misspellings and standard abbreviations. For example, the GeocodeUSAddress can recognize Mane for Main and KC for Kansas City.
- Searches for any alias matches to the USPS and Spatial data (TIGER and TomTom). For example, GeocodeUSAddress recognizes that in Boulder, CO Highway 36 is know as 28th Street.
- Searches for any USPS recognized firm names for additional match verification.
- Searches for street intersection matches. Matching to an intersection is extremely useful when you are using address matching to obtain a geocode.
- Searches for addresses lines that contain a house number and unit number as the same element. For example, GeocodeUSAddress recognizes the input 4750-200 Walnut Street and performs recombination to output 4750 WALNUT ST STE 200.

Note: The USPS does not consider intersections valid addresses for postal delivery. Therefore, the GeocodeUSAddress does not match intersections when processing in CASS mode.

3. Scores each possible match against the parsed input.

GeocodeUSAddress compares each element in the input address to the corresponding element in the match candidates, and assigns a confidence level. GeocodeUSAddress weighs the confidence level for all of the elements within a match candidate, and assigns a final score to the sum.

Note: GeocodeUSAddress uses a penalty scoring system. If an element does not exactly match an element in the match candidate, the GeocodeUSAddress adds a penalty to the score of the match candidate. Therefore, scores with lower numbers are better matches.

4. Determines the match.

GeocodeUSAddress prioritizes each match candidate based on the assigned confidence score and returns as a match the candidate that has the lowest score.

The match mode you choose determines the range that GeocodeUSAddress allows for a match. GeocodeUSAddress only returns a match if the score of the target address falls within the range designated by the selected match mode.

In some cases, more than one match candidate may have the lowest score. In this instance, GeocodeUSAddress cannot determine on its own which record is correct, and returns a status indicating multiple matches.

Note: If you have enabled Delivery Point Validation (DPV) processing, GeocodeUSAddress automatically attempts to resolve multiple matches using DPV.

Along with a standardized address, GeocodeUSAddress also returns the following:

- · Geocode—Longitude and latitude for the address
- Match code—Information about the match of the input address to the reference data
- Location code—Precision level of a geocode
- Parity—The side of the street on which the match resides.

GeocodeUSAddress does not return parity when processing in relaxed mode. For more information about GeocodeUSAddress output, see **Response** on page 66.

City-only Lastline Matching

City-only lastline matching permits address matching with only a city in the input lastline. The city should be provided using either the AddressLine1 (using single-line address input), AddressLine2, LastLine or City input fields.

With city-only lastline input, all of the states are searched in which the input city exists. Therefore, there is the possibility of an increase in multimatches (return of E023 or E030 Match Codes) when matching with city-only input instead of city+state input.

Restrictions:

- City-only lastlne input matching is not supported in CASS mode.
- City-only lastline is not supported when matching to User Dictionaries.
- When matching using city-only lastline, the Option.PreferZipCodeOverCity setting is ignored
- It is strongly recommended to not use city-only lastline matching in Relaxed match mode to avoid the return of false-positive matches.

Address Range Matching

Some business locations are identified by address ranges. For example, a shopping plaza could be addressed as 10-12 Front St. This is how business mail is typically addressed to such a business location. These address ranges can be geocoded to the interpolated mid-point of the range.

Address ranges are different from hyphenated (dashed) addresses that occur in some metropolitan areas. For example, a hyphenated address in Queens County (New York City) could be 243-20 147 Ave. This represents a single residence (rather than an address range) and is geocoded as a single address. If a hyphenated address returns as an exact match, GeocodeUSAddress does not attempt to obtain an address range match.

Address range matching is not available in Exact or CASS modes, since an address range is not an actual, mailable USPS[®] address. The following fields are not returned by address range geocoding:

- ZIP + 4[®] (in multiple segment cases)
- Delivery point

- · Check digit
- Carrier route
- Record type
- Multi-unit
- Default flag

Address range matching works within the following guidelines:

- There must be two numbers separated by a hyphen.
- The first number must be lower than the second number.
- Both numbers must be of the same parity (odd or even) unless the address range itself has mixed odd and even addresses.
- Numbers can be on the same street segment or can be on two different segments. The segments do not have to be contiguous.
- If both numbers are on the same street segment, the geocoded point is interpolated to the approximate mid-point of the range.
- If the numbers are on two different segments, the geocoded point is based on the last valid house number of the first segment. The ZIP Code and FIPS Code are based on the first segment.
- In all cases, odd/even parity is evaluated to place the point on the correct side of the street.

Predictive Lastline

Predictive lastline allows you to match an address when only an input street address and latitude/ longitude coordinates are provided, rather than the traditional street address with lastline input. For example, an input of 4750 Walnut with latitude/longitude coordinates located in Boulder, will return full address information.

Additional feature information

- Predictive Lastline uses a search radius of 150 feet.
- · Predictive Lastline is disabled by default.
- When Predictive Lastline is not enabled, if a singleline address is provided, any input latitude and longitude values are ignored and the input address is geocoded.
- If the input latitude/longitude coordinates fall near the borders of multiple cities, the Enterprise Geocoding Module processes all cities and returns the results of the best match. If the results are determined as equal, then a multi-match is returned.
- Predictive lastline does not require a license for reverse geocoding.
- · This feature will work with any type of dataset.

Description		
Specifies whether GeocodeUSAddress should match using the street add and input latitiude/longitude coordinates, rather than the traditional stree address with lastline input.		
Enable Predictive Lastline processing.		
Disable Predictive Lastline processing. Default.		

Enabling Predictive Lastline

The following procedure describes how to enable and set up the Predictive Lastline feature.

- 1. Set Option.PredictiveLastLine = Y
- 2. Set Option.Latitude = integer value
- 3. Set Option.Longitude = integer value
- 4. Set AddressLine1 = input street address

Input Parameters

Geocoding Options

GeocodeUSAddress Geocoding Options

The following table lists the options that control how a location's coordinates are determined.

Parameter	Description
Option.Dataset	The name of the database resource that contains the data to use in the search process. Use the database name specified in Management Console's Spectrum Databases page.

Parameter Description Option.Offset Specifies the offset distance from the street segments, in feet. The range is 0 to 5280. Default = 50 feet. The offset distance is used in street-level geocoding to prevent the geocode from being in the middle of a street. It compensates for the fact that street-level geocoding returns a latitude and longitude point in the center of the street where the address is located. Since the building represented by an address is not on the street itself, you do not want the geocode for an address to be a point on the street. Instead, you want the geocode to represent the location of the building which sits next to the street. For example, an offset of 40 feet means that the geocode will represent a point 40 feet back from the center of the street. The distance is calculated perpendicular to the portion of the street segment for the address. Offset is also used to prevent addresses across the street from each other from being given the same point. The diagram below shows an offset point in relation to the original point. Offset Poin Original Point

Street coordinates are accurate to 10,000ths of a degree and interpolated points are accurate to the millionths of a degree.

Parameter	Description			
Option.Squeeze	the middle of the squeeze setting too close to the The range is 0 t The following di points.	o 2147483647. Default = 50 feet. agram compares the end points of a street to squeezed end		
	Squeezing the s reducing the len address points a is 1,000 feet and would result in e were to set a squ 100 feet torward segment would	eet Segment End street segment endpoints affects street-level matching by gth of a street segment, thereby reducing the spacing between long the segment. For example, if the length of a street segment there are 10 addresses along the segent, street-level matching each address being spaced 100 feet apart (1,000 ÷ 10). If you ueeze value of 100 feet, moving each street segment endpoint d the center of the street segment, the length of the street be reduced to 800 feet (reduced by 100 feet on each end). ching would then result in addresses beging spaced 80 feet b.		
Option.LatLonFormat	Specifies the for	rmat of the latitude/longitude returned by the geocoder.		
	Decimal	The latitude/longitude is returned in decimal format. Default. For example: 90.000000-180.000000		
	Integer	The latitude/longitude is returned in integer format. For example: 90000000-18000000		

Parameter	Description				
Option.Datum	Determines the North American Datum to use when geocoding datum on the input value. Datum is the mathematical model of the Earth used to calculate the coordinates on any map, chart, or survey system.				
	Latitudes and are valid only		NAD27 This datum does not include the Alaskan Islands or Hawaii Latitudes and longitudes that are surveyed in the NAD27 sy are valid only in reference to NAD27 and are not valid for m outside the U.S.		and longitudes that are surveyed in the NAD27 system only in reference to NAD27 and are not valid for maps
	NAD83	NAD83 This datum is earth-centered and defined with satellite terrestrial data. NAD83 is compatible with the World Ge System 1984 (WGS84), which is the terrestrial reference associated with the NAVSTAR Global Positioning System used extensively for navigation and surveying. Default.			
Option.CentroidPreference	Determines the type of centroids returned by the geocoder. A centroid is the center of an area. The centroid coordinates are the average of the sets of coordinates that describe the area.NoCentroidsDo not return centroids. If an address-level geocode cannot be determined, do not attempt to determine a centroid.AddressUnavailableReturn a ZIP Code centroid if an address-level geocode cannot be determined (default).				
			cannot be determined, do not attempt to determine a		
			-		
	AllCentro	oids	Return ZIP Code centroids only. If you select this option, address-level geocodes will not be returned.		

Parameter	Description			
Option.FallbackToStreet	Specifies whether to attempt to return a street centroid when an address-level geocode cannot be determined. To determine a street centroid, the geocode searches the input ZIP Code or city for the closest match. If the geocoder is able to locate the street, it returns a geocode along the matched street segment			
	For example, if the input address is 5000 Walnut Street, Boulder 80301, and there is no 5000 Walnut Street, the geocoder searches for the closest match to that address within the ZIP Code 80301. If there were no input ZIP Code, the geocoder would search for the closest match to the input address within Boulder.			
	If the input address is Walnut Street, Boulder 80301, since there is no house number, the geocoder searches for the street within the input ZIP Code.			
	Street centroid geocodes are indicated by value in the LocationCode output field that begins with "C". For more information, see Street Centroid Locatio Codes on page 204.			
	Note: This option is not available if you set Option.MatchMode to CASS.			
	Y Yes, attempt to determine the street centroid when an address-leve geocode cannot be determined.			
	No, do not attempt to determine the street centroid when an address-level geocode cannot be determined. Default.			
Option.FallbackToGeographic	Specifies whether to attempt to return a city, county, or state centroid when a address-level geocode cannot be determined. The geocoder returns the mosprecise geographic centroid that it can based on the input. For example, if the input contains a valid city and state, a city centroid would be returned.			
	Note: There are approximately 300 major cities that can be geocoded to a city centroid level even if a valid state is not provided in the input			
	Geographic centroid geocodes are indicated by value in the LocationCode output field that begins with "G". For more information, see Geographic Centroid Location Codes on page 211.			
	Note: This option is not available if you set Option.MatchMode to CASS.			
	Y Yes, attempt to determine the geographic centroid when an address-level geocode cannot be determined.			
	N No, do not attempt to determine the geographic centroid when an address-level geocode cannot be determined. Default.			

Parameter	Description				
Option.AddressPointInterpolation	Specifies whether to perform address point interpolation when an exact match for the address cannot be found in the geocoding database. Address point interpolation is a patented process that results in a more accurate interpolated point. It improves upon regular street segment interpolation by using point data in the interpolation process, as opposed to using street segments alone.				
	Note: Address point interpolation is only available when using a point-level geocoding database. It is not available when using point addresses in an auxiliary file.				
	Y Yes, perform address point interpolation.				
	No, do not perform address point interpolation. Default.				
	The following illustration shows how address point interpolation works. In the example, the input house number is 71. The geocoding database contains address points for 67 and 77. The street segment has a range of 11 to 501. With address point interpolation, GeocodeUSAddress performs the interpolation for the input house number 71 using the points of 67 and 77. Without address point interpolation, GeocodeUSAddress performs the interpolation with the street segment end points of 11 and 501, resulting in a far less accurate result.				
	Without address point interpolation 67 71 (Input Address) 77				
	11 501				

Parameter	Description			
Option.CenterlineOffset	The offset distance, in feet, used to calculate the street centerline coordinate Default = 0 feet.			
	If you specify a value other than 0, GeocodeUSAddress calculates the street centerline coordinates by offsetting the centerline point by the distance you specify in the direction of the parcel centroid.			
	In an interpolated match, the centerline offset cannot be greater than the distance from the centerline to the interpolated address point. If you specify a centerline offset distance that is greater than this distance, the offset will be limited to the distance to the interpolated point. In effect, the centerline coordinates would be the same as the coordinates for the interpolated point.			
Option.RetrieveAPN	Specifies whether to determine the address's APN (assessor's parcel number) The APN is an ID number assigned to a property by the local property tax authority. The APN is returned in the APN output field, which is part of the Census output group.			
	Note: This option requires that you have licensed and installed the Cenrus Enhanced Points or Centrus Premium Points database. APN data is not available for all addresses. See the coverage map included with the points database.			
	Y Yes, return the assessor's parcel number.			
	N No, do not return the assessor's parcel number. Default.			

Parameter	Desc	ription		
Option.RetrieveElevation	distan in the	Specifies whether to return the elevation of the address. Elevation is the distance above or below sea level of a given location. The elevation is returne in the Elevation output field, which is part of the Latitude/Longitude output group.		
		Note: This option requires that you have licensed and installed the Centrus Premium Points database. Elevation data is not available for all addresses. See the coverage map included with the points database.		
	Y	Yes, return the elevation of the address.		
	Ν	No, do not return the elevation of the address. Default.		
Option.AlwaysFindCandidates	Specif inform	ïes whether to enable centerline matching in order to get street centerline ation.		
		Note: Centerline matching requires that a point-level database is installed.		
	Y	Yes, enable centerline matching. To return centerline data in the output, you must also set Option.OutputRecordType = N.		
	N	No, do not enable centerline matching. Default.		

Parameter	Description
Option.FIND_APPROXIMATE_PBKEY	When Option.FIND_APPROXIMATE_PBKEY is enabled, if an address match is not made to Master Location Data (MLD), but to a different dataset, the pbKey [™] unique identifier of the nearest MLD point located within the search distance is returned. To distinguish when a fallback pbKey [™] unique identifier is returned, the PBKey return value contains a leading character of "X" rather than "P", for example: X00001XSF1IF. Note, all of the other fields returned for the address match, including the geocode and all associated data, reflect the match results for the input address. The fallback pbKey [™] unique identifier can then be used for the lookup to the GeoEnrichment dataset(s), and the attribute data for the fallback location is returned for the match.
	For more information, see PBKey Fallback on page 17.
	Note: This option requires that you have licensed and installed the Master Location Dataset.
	The search distance for the nearest MLD point is configurable using the Option.SearchDistance parameterwith an allowable search radius of 0-5280 feet and a default value of 150 feet.
	Y When a matched address does not have an associated pbKey [™] unique identifier, attempt to return the nearest address record's pbKey [™] unique identifier.
	N When a matched address does not have an associated pbKey [™] unique identifier, do not return the nearest address record's pbKey [™] unique identifier. Default.
Option.SearchDistance	When the PBKey Fallback option is enabled, this field sets the distance to use when searching for the nearest address record with an associated pbKey [™] unique identifier. The allowable range is 0-5280 feet. Default = 150 feet. Note: Supported only in forward geocoding.

Matching Options

GeocodeUSAddress Matching Options

Matching options are used to determine how address searches are performed. They let you set match preferences, criteria and restrictions, and multiple match settings so that the matching can be as strict or relaxed as you need.

Parameter	Description		
Option.AddressPreference	Determines which address to use when more than one address is present ir the address block.		
	PreferPOBox PreferBottom		Uses the P.O Box.
			Uses the second line entered. Default. You must select this value if you.
	PreferStreetAd	dress	Uses the street address.
Option.FirstLetterSearch	Specifies whether to look for the correct first letter of a street name if the first letter is missing or incorrect. If enabled, the geocoder searches through the alphabet looking for the correct first letter to complete the street address. Note: This option is not available if the match mode is set to Exact. Y Perform first letter search.		
	N Do	o not perform	first letter search. Default.
	This example includes an incorrect first letter: Input: 4750 nalnut boulder co 80301 Output: 4750 Walnut St Boulder CO 80301-2532		
	This example ex	cludes a first	letter:
	Input: 4750 alnut boulder co 80301 Output: 4750 Walnut St Boulder CO 80301-2532		
	This example inc	cludes an extr	a first letter:
	Input: 4750 wwa Output: 4750 Wa		o 80301 er CO 80301-2532

Parameter	Description	Description		
Option.PerformDPV	DPV is a Uni accuracy of a have license	Specifies whether to process addresses using Delivery Point Validation (DPV). DPV is a United States Postal Service (USPS) technology that validates the accuracy of address information down to the physical delivery point. You must have licensed the optional DPV processing option to use this feature. You must also install the DPV database.		
		enable this processing option and specify \mbox{D} in utRecordType.		
	Y	Perform DPV.		
	Ν	Do not perform DPV. Default.		
	If you use DI	PV, multiple matches are automatically resolved.		
	False-positive addresses, also known as seed records, are add USPS monitors to ensure users are not attempting to create a m the DPV data. If the geocoder matches an address in your inpu- false-positive address, you receive a message indicating you hav a false-positive address. Processing continues to the end of you processing is not available for this job and subsequent jobs un reported the false-positive address encounter to technical supp received a new security key.			
Option.PerformLACSLink	Specifies whether to process addresses using LACS ^{Link} .			
	Y	Perform LACS ^{Link}		
	Ν	Do not perform LACS ^{Link} . Default.		
	Q so that the	ACS ^{Link} , be sure to choose to specify output record types P and e fields USLACS, USLACS.ReturnCode, and LACSADDRESS in the output.		
	For more info on page 21.	ormation, see Locatable Address Conversion System (LACS)		

Parameter	Description		
Option.PreferZipCodeOverCity	Specifies whether to prefer candidates that match the input ZIP over candidates that match to input city. Note: This option is not available when processing in CASS mode.		
	Y Prefer candidates that match the input ZIP Code.		
	N Prefer candidates that match the input city. Default.		
	For example, consider this input address:		
	301 BRYANT ST SAN FRANCISCO CA 94301		
	Without this option enabled, the best match would be the one that matches the input city name:		
	301 BRYANT ST SAN FRANCISCO CA 94107-4167		
	With this option enabled, the best match would be the one that matches input ZIP Code:	s the	
	301 BRYANT ST PALO ALTO CA 94301-1408		

Building, Firm name and Point of Interest matching

Firm name search

Parameter	Description		
Option.FirmNameSearch	Specifies whether to use firm name matching logic to enhance address matching. Firm matching logic matches a business name in the input to recognized business names. The input firm name does not need to be spelled correctly to obtain a match. A soundex algorithm is used to match the firm name. A suite or unit number is not required to make the match.		
	Note: This type of match is not available when processing in CASS mode.		
	One of the following	:	
	Always Always attempt to match using firm name matchin firm name matching fails, attempt to match using address matching.		
	OnAddressLineFail	Use firm matching only if a match cannot be determined using address matching.	
	Never	Do not use firm matching. Default. Note that the firm name may be corrected even if you specify Never if a match can be found using the address line data.	

Building search

Parameter	Description	
Option.BuildingSearch	Specifies whether to attempt to obtain a street address when the input address contains a building name with no suite or unit number. When this option is disabled, the geocoder is able to match to building name only if there is a unit number in the input. For example, if the building searc option were disabled and you entered this input:	
	5001 Chrysle New York, N	-
	The street a	ddress would be returned:
	405 Lexington Ave RM 5001 New York, NY 10174-5002 With this option enabled, the geocoder is also able to obtain a street addre when only a building name with no unit number is provided. For example, you enable this option and provide this address: Chrysler Bldg New York, NY 10174	
	You will get f	he street address:
	405 Lexington Ave New York, NY 10174-00	
	Note mod	e: This type of match is not available when processing in CASS e.
	Y Use firm name matching logic. Default.	
	Ν	Do not use firm name matching logic.

Point of Interest matching

The optional Point Of Interest (POI) Index file (poi.gsi) included with the Master Location Data and HERE Point Addresses datasets provides expanded support in alias name matching.

To enable POI matching:

- 1. Add the MLD or HERE Point Addresses data as a Database Resource.
- 2. Set Option.BuildingSearch to Y. The POI Index file will automatically be searched when this option is enabled and a firm, building or POI name is specified in the AddressLine1 input field.
- 3. If an alias match is made to the POI Index file, the IsAlias output field, or, in the case of a centerline match, CenterlineIsAlias field, returns A11. To enable the return of these fields, set Option.OutputRecordType = Q and N respectively.

Predictive Lastline

Predictive lastline allows you to match an address when only an input street address and latitude/ longitude coordinates are provided, rather than the traditional street address with lastline input. For example, an input of 4750 Walnut with latitude/longitude coordinates located in Boulder, will return full address information.

Additional feature information

- Predictive Lastline uses a search radius of 150 feet.
- Predictive Lastline is disabled by default.
- When Predictive Lastline is not enabled, if a singleline address is provided, any input latitude and longitude values are ignored and the input address is geocoded.
- If the input latitude/longitude coordinates fall near the borders of multiple cities, the Enterprise Geocoding Module processes all cities and returns the results of the best match. If the results are determined as equal, then a multi-match is returned.
- Predictive lastline does not require a license for reverse geocoding.
- This feature will work with any type of dataset.

Parameter	Description	
Option.PredictiveLastLine	Specifies whether GeocodeUSAddress should match using the street addre and input latitiude/longitude coordinates, rather than the traditional street address with lastline input.	
	Y	Enable Predictive Lastline processing.
	Ν	Disable Predictive Lastline processing. Default.

Enabling Predictive Lastline

The following procedure describes how to enable and set up the Predictive Lastline feature.

- 1. Set Option.PredictiveLastLine = Y
- 2. Set Option.Latitude = integer value
- 3. Set Option.Longitude = integer value
- 4. Set AddressLine1 = input street address

Search Area

The search area options set the search constraints to use when matching, such as to a city, finance area, or within a specified search radius distance that can be limited to the input state. The search area options can assist in finding a match when the input address contains limited or inaccurate city or ZIP Code information.

The following example illustrates the different match results for an input address that contains an incorrect ZIP Code when setting the Search Area to City, then to Finance Area.

Input Address	Match with Search Area set to City	Match with Search Area set to Finance Area
100 Main St East Aurora, NY 14166	100 MAIN ST EAST AURORA NY 14052-1633	100 MAIN ST DUNKIRK NY 14048-1844
Input address has an incorrect ZIP Code.	Match is made to East Aurora 14052 as there is no candidate in the 14166 input ZIP Code.	Same finance area as the input ZIP Code 14166.

Search Area and Distance Options

Parameter	Description Note: In CASS match mode, only the search area options described in FIND_SEARCH_AREA_DEFAULT are available.			
Option.FIND_SEARCH_AREA				
	FIND_SEARCH_AREA_DEFAULT	The impact of the FIND_SEARCH_AREA_DEFAULT setting depends on the match mode you're using for matching.		
		When Option.FIND_SEARCH_AREA_DEFAULT is set and you're matching using either CASS or Relaxed match mode, the search area is determined based on the Option.CentroidPreference setting:		
		 If Option.CentroidPreference = AllCentroids, the FIND_SEARCH_AREA_CITY search area is used. If Option.CentroidPreference is set to either NoCentroids or AddressUnavailable, the FIND_SEARCH_AREA_FINANCE search area is used. 		
		When FIND_SEARCH_AREA_DEFAULT is set and you're matching using any other match mode - Custom, Exact, Close or Interactive - the FIND_SEARCH_AREA_FINANCE search area is used.		
	FIND_SEARCH_AREA_FINANCE	Searches the entire Finance Area for possible streets.		
		Note: This option has no effect when performing a ZIP centroid match or a geographic geocode.		
	FIND_SEARCH_AREA_CITY	Searches the specified city.		
	FIND_SEARCH_AREA_EXPANDED	Enables the setting of the search radius distance to use when matching. See Option.FIND_SEARCH_AREA_DISTANCE below.		
	FIND_EXPND_SRCH_LIM_TO_STATE	Limits the search to the state, within the search radius distance. The default search radius is 25 miles.		

Parameter	Description
Option.FIND_SEARCH_AREA_DISTANCE	When the FIND_SEARCH_AREA_EXPANDED option is selected, this field allows you to enter the search radius distance to use when matching. Valid values = 0-99 (miles). Default = 25 miles.
	Note: Ignored in CASS match mode.

Multi-matches/Candidates

Parameter	Descr	Description		
Option.KeepMultimatch		his option to return the list of possible matches when there is more e possible match for the input address and a single best match cannot tified.		
	Y	Return the addresses that are possible matches for the input address. Default.		
	Ν	Do not return the ambiguous matches.		
Option.KeepCandidates	produce candida	his option to return candidate addresses whenever the match attempt es candidates. If you enable this option, the geocoder will return ates both when the input address matches to a single address and he input address matches multiple addresses.		
	Optic	rameter differs from Option.KeepMultimatch in that the on.KeepMultimatch parameter does not return candidates if ut address matches to a single address.		
	Y	Return candidates for all match attempts.		
	Ν	Do not return candidates for all matches. Default.		
Option.CloseMatchesOnly	just tho used to	becify Option. KeepCandidates=Y you can choose to return se candidates that are considered to be a close match. The criteria determine whether a candidate is a close match are those you specify Option.MatchMode parameter.		
	Y	Return close match candidates only. Default.		
	N Return all candidates.			

Match Modes

Match modes determine the leniency used to make a match between your input and the Centrus data. Select a match mode based on the quality of your input and your desired output. For example, if you have an input database that is prone to errors, you may want to select the relaxed match mode.

Parameter	Description	
Option.MatchMode	Custom	Allows you to select the specific criteria to use when matching the input address to an address in the postal database.
	Exact	Requires a very tight match. This is a restrictive mode that generates the fewest number of match candidates to search, which decreases the time to obtain a match. When using this mode, ensure that your input address list is very clean; free of misspellings and incomplete addresses.
	Close	Requires a moderately confident match. Generates a moderate number of match candidates.
	Relax	This is the loosest match mode and generates the most match candidates, which increases the processing time and results in more multiple matches. Use this mode if your address list may contain misspellings and incomplete addresses. This mode does not respect the street parity for an address match. Default.
	Interactive	Available in single-line address matching only. This mode is designed to better handle the specific matching challenges presented by interactive matching. Interactive mode permits for more flexible matching patterns and may, in some cases, return additional possible matches than relaxed match mode. This mode recognizes and parses two unit numbers on the same address line, for example a building and unit number. This mode does not respect the range parity when making an address match.
	CASS	Imposes additional rules to ensure compliance with the USPS regulations for CASS. The purpose of this mode is to create a list of mailable addresses. This mode generates a large number of match candidates. This mode deviates from the other modes in its processing. This mode does not perform intersection, building name, or spatial alias (TIGER and TomTom street name alias) matches. It does not match to candidates from data sources that do not have USPS equivalent records. This mode recognizes and parses two unit numbers on the same address line, for example a building and unit number.

Interactive match mode

Interactive mode is designed for interactive mobile/web applications. In this use case, it is expected that users may enter single-line addresses that contain misspelled, inaccurate, and/or missing information, so this input is processed utilizing a looser set of criteria for matching than the other match modes. As a result, the matching output could include multiple match candidates. The list of

matches would be presented to the user who could then select the desired match candidate. If an exact match is found, then that single match candidate is returned; a mix of accurate and inaccurate results are not presented.

Capabilities and restrictions:

- Interactive match mode allows users to break the cardinal rule: If the user enters 123 S Main and there is only 123 N Main, a match is made and a match code is returned that reflects the modified directional.
- Interactive match mode handles cases where users transpose pre-directionals with post-directionals without penalty.
- Interactive match mode ignores the 'Prefer ZIP Code over city' setting. When the city and ZIP Code don't match correctly, the best geocoding result will be returned based on an analysis of all the input address elements.
- When operating in interactive mode, in cases where a point address or interpolated street address result cannot be determined, ZIP-9 or ZIP-7 centroid(s) may be returned.

The following table shows a comparison of the match results when running in interactive vs. close or relaxed modes.

Single-line input address	Interactive mode match candidates	Close/Relaxed mode single match candidate
HIGHLAND VIEW WINCHESTER 01890	5 HIGHLAND VIEW AVE, WINCHESTER, MA 01890 5 HIGHLAND TER, WINCHESTER, MA 01890 5 HIGHLAND AVE, WINCHESTER, MA 01890	5 HIGHLAND VIEW AVE, WINCHESTER, MA 01890
414 PINE WILLIAMSFIELD 61489	414 N PINE ST, WILLIMAMSFIELD, IL 61849 414 PINE ST, WILLIAMSFIELD, IL 61489	414 N PINE ST, WILLIMAMSFIELD, IL 61849
46 HORNBEAM ST CRANSTON RI (conflict with street type)	46 HORNBEAM DR, CRANSTON, RI	46 HORNBINE ST, CRANSTON, RI

Single-line input address	Interactive mode match candidates	Close/Relaxed mode single match candidate
611 W 13TH JOPLIN MO 64801 (conflict between directional and ZIP Code)	611 E 13TH ST, JOPLIN, MO 64801 611 W 13TH ST, JOPLIN, MO 64804	611 W 13TH ST, JOPLIN, MO 64804

Match Code

Extended Match Codes

The Extended Match Codes option enables the return of additional information about any changes in the house number, unit number and unit type fields. In addition, it can indicate whether there was address information that was ignored. The Extended Match Code is only returned for address-level matches (match codes that begin with A, G, H, J, Q, R, S, T or U), in which case a 3rd hex digit is appended to the match code (see Match Codes on page 188).

Note: A typical match code contains up to 4 characters: a beginning alpha character followed by 2 or 3 hex digits. The third hex digit is only populated for intersection matches or as part of the Extended Match Code.

For information about the 3rd hex digit values for:

- Intersection matches, see Definitions for 1st-3rd hex digit match code values on page 190
- Extended Match Codes, see Definitions for Extended Match Code (3rd hex digit values) on page 191

"Address information ignored" is specified when any of these conditions apply:

- The output address has content in the AdditionalInputData field.
- The output address has a second address line (AddressLine2).
- The input address is a dual address (two complete addresses in the input address). For example, "4750 Walnut St. P.O Box 50".
- The input last line has extra information that is not a city, state or ZIP Code, and is ignored. For example, "Boulder, CO 80301 USA", where "USA" is ignored when matching.

The table below provides descriptions of the Extended Match Code 3rd hex digit return values.

Input Addressline	Output Addressline	Extended Code	Description
4750 WALNUT ST STE 200	4750 WALNUT ST STE 200	0	Matched on all address information on line, including Unit Number and Unit Type if included.
4750 WALNUT ST C/O JOE SMITH	4750 WALNUT ST	1	Matched on Unit Number and Unit Type if included. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
4750 WALNUT ST UNIT 200	4750 WALNUT ST STE 200	2	Matched on Unit Number. Unit Type changed.
4750 WALNUT ST UNIT 200 C/O JOE SMITH	4750 WALNUT ST STE 200	3	Matched on Unit Number. Unit Type changed. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
4750 WALNUT ST STE 2-00	4750 WALNUT ST STE 200	4	Unit Number changed or ignored.
4750 WALNUT ST STE 2-00 C/O JOE SMITH	4750 WALNUT ST STE 200	5	Unit Number changed or ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
4750 WALNUT ST STE 400	4750 WALNUT ST STE 400	6	Unit Number changed or ignored. Unit Type changed or ignored. In this example, Suite 400 is not valid for the input address, but the address match is not prevented because of an invalid unit number.
4750 WALNUT ST UNIT 2-00 C/O JOE SMITH	4750 WALNUT ST STE 200	7	Unit Number changed or ignored. Unit Type changed or ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
47-50 WALNUT ST STE 200	4750 WALNUT ST STE 200	8	Matched on Unit Number and Unit Type if included. House number changed or ignored.
47-50 WALNUT ST STE 200 C/O JOE SMITH	4750 WALNUT ST STE 200	9	Matched on Unit Number and Unit Type if included. House number changed or ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.

Input Addressline	Output Addressline	Extended Code	Description
47-50 WALNUT ST UNIT 200	4750 WALNUT ST STE 200	A	Matched on Unit Number. Unit Type changed. House Number changed or ignored.
47-50 WALNUT ST UNIT 200 C/O JOE SMITH	4750 WALNUT ST STE 200	В	Matched on Unit Number. Unit Type changed. House Number changed or ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
47-50 WALNUT ST STE 20-0	4750 WALNUT ST STE 200	С	House Number changed or ignored. Unit Number changed or ignored.
47-50 WALNUT ST STE 20-0 C/O JOE SMITH	4750 WALNUT ST STE 200	D	House Number changed or ignored. Unit Number changed or ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
47-50 WALNUT ST UNIT 20-0	4750 WALNUT ST STE 200	Ε	House Number changed or ignored. Unit Number changed or ignored. Unit Type changed or ignored.
47-50 WALNUT ST UNIT 2-00 C/O JOE SMITH	4750 WALNUT ST STE 200	F	House Number changed or ignored. Unit Number changed or ignored. Unit Type changed or ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field .

Match Code Option

Parameter	Description	
Option.ExtendedMatchCode	Specifies whether to return the Extended Match Code. For more information, see Match Code on page 60.	
	Y	Yes, return the Extended Match Code.
	Ν	No, do not return the Extended Match Code. Default.

Custom Match Criteria

Difference Between Match Criteria for U.S. and Non-U.S. Geocoding

The "must match criteria" used in the custom match mode of Geocode US Address work differently than the "close match criteria" in non-U.S. geocoders. For Geocode US Address, the custom match criteria specify which address elements must match the reference database in order for the match to be returned as a candidate. All candidates returned by Geocode US Address will match the elements you specify as long as those elements are available in the reference database. However, in non-U.S. geocoders, the "close match" criteria are used to determine which candidates are close matches and which are non-close matches. Non U.S. geocoders can return both close candidates and non-close candidates, depending on whether you enable the <code>Option.CloseMatchesOnly</code> option. In summary, the "must match" criteria used by Geocode US Address automatically limit the candidates returned, whereas the "close match criteria" used by non-U.S. geocoders do not limit the candidates returned.

Custom Match Criteria Options

Description	
Specifies whether candidates must match all non-blank input fields. For example, if an input address contains a city and postal code, then candidates for this address must match the city and postal code.	
Y	Yes, candidates must match all input.
N	No, candidates do not have to match all input. Default.
Specifies	whether candidates must match the street name.
Y	Yes, candidates must match the street name.
N	No, candidates do not have to match the street name. Default.
Option.MustMatchStateProvince Specifies whether candidates must match the state.	
Y	Yes, candidates must match the state.
N	No, candidates do not have to match the state. Default.
	Specifies example, for this ac Y N Specifies Y N Specifies Y

Parameter	Descr	Description			
Option.MustMatchHouseNumber	number nearest number more of require number	Specifies whether candidates must match the house number. If the input house number is not within a range from the street, GeocodeUSAddress selects the nearest range on the street which has the same parity (even or odd house number) as the input address number. GeocodeUSAddress returns one or more of the closest matches inside this range that preserves street parity. This requires GeocodeUSAddress to change the house number. The new house number is equal to one of the range's endpoints, possibly plus or minus one to preserve street parity.			
		Note: Even when this option is disabled and an inexact match on the house number is found, GeocodeUSAddress still returns an error code.			
	a match	his option is disabled and no exact matching house number is found, n code of either E029 (no matching range, single street segment found), 0 (no matching range, multiple street segment) is returned.			
	GeocodeUSAddress does not change the house number on the output address. In order to access the inexact address number candidates, you must specify Option.KeepMultimatch=Y. If there are inexact house number candidates returned, the corresponding match codes begin with the letter 'H' indicating that the house number was not matched.				
	Additionally, even when one or more exact candidates are found, inexact matches to the house number are still on the list of possible candidates, and these can be differentiated from the others by their Hxx match codes. For more information about match codes, see Match Codes on page 188.				
	One of the following:				
	Y	Yes, candidates must match the house number. Default.			
	Ν	No, candidates do not have to match the house number.			
Option.MustMatchCity	matche particul	es whether candidates must match the city. If you do not require exact s on city, the geocoder searches on the street address matched to the ar postal code, and considers other cities that do not match the name, match the postal code.			
	Y	Yes, candidates must match the city.			
	Ν	No, candidates do not have to match the city. Default.			
Option.MustMatchPostalCode	exact m While t	es whether candidates must match the postal code. If you do not require natch on postal codes, the geocoder searches a wider area for a match. his results in slower performance, the match rate is higher because uest does not need to match exactly when it compares match ates.			
	Y	Yes, candidates must match the postal code.			
	Ν	No, candidates do not have to match the postal code. Default.			

Output Data

GeocodeUSAddress Output Data Options

The following table shows the GeocodeUSAddress options that control which data GeocodeUSAddress returns in the output.

Parameter	Description		
Option.OutputRecordType	Specifies optional data to include in the output. Note that GeocodeUSAddress always returns the default data listed in Default Output on page 76. The data you select here is returned with the default output data.		
	 X—Auxiliary B—Block Address C—Census N—Centerline Projection D—DPV Z—Geo Confidence L—Latitude/Longitude E—Parsed Elements P—Postal Data Q—Qualifiers R—Range S—Segment 		
	For a description of the fields in each output group, see Response on page 66.		
	If you do not want all of the fields in a record type returned, do not use Option.OutputRecordType; instead, use Option.OutputFields to specify the desired individual output fields.		
Option.OutputFields	Specifies the individual output fields you want returned. List fields with a pipe () between each field. You can use this option instead of the Option.OutputRecordType option to limit the output to those fields that are important to your data needs. By default, these are the address fields returned: AddressLine1 LastLine Longitude Latitude MatchCode LocationCode For a list of all the fields included in each data field, see Response on page 66.		

Output Format

GeocodeUSAddress Output Format Options

The following table lists the GeocodeUSAddress options that control the format of the output.

Parameter	Description		
Option.OutputCasing	Specifie M	es the casing of the output data. One of the following: Returns the output in mixed case. Default. For example: 123 Main St	
		Mytown FL 12345	
	U	Returns the output in upper case. For example:	
		123 MAIN ST MYTOWN FL 12345	
Option.OutputFormattedOnFail	Specifies whether to normalize addresses that fail to match, and addresses that are unchanged. Normalization formats an address to the USPS guidelines without validating the address.		
	Y	Perform standardization. Default.	
	Ν	Do not perform standardization.	
Option.OutputPostalCodeSeparator	Specifie	es whether to include the dash in full postal code output.	
	Y	Include the dash. Default.	
	N	Do not include the dash.	
Option.OutputVerbose	fields pr Locatio assigne	es whether to provide an additional description field as output. These rovide the text equivalent to a field represented by a code. For example nCode returns a code that indicates the accuracy (quality) of the ed geocode. LocationCode.Description provides the description for the sturned.	
	Y	Include verbose fields.	
	Ν	Do not include verbose fields. Default.	

Response

GeocodeUSAddress always returns a default set of output fields that contain the latitude/longitude, standardized address, and result indicators. For information about these fields, see **Default Output** on page 76. You can also choose to include optional categories of output data.

Auxiliary

Auxiliary data output fields contain information about the an auxiliary file match. For more information about using an auxiliary file, see Auxiliary File Overview on page 179. GeocodeUSAddress only returns values when matching against an auxiliary file. To include auxiliary data fields in the output, set Option.OutputRecordType = X.

Response Element	Max. Field Length with null terminator	Description
AuxiliaryData	301	The user data field in an auxiliary file match. Note: GeocodeUSAddress does not process this information. It simply includes the user data contained in the auxiliary file.
MCDCode	6	The Minor Civil Division (MCD) code. A Minor Civil Division is a subdivision of a county, such as a township. There are Minor Civil Divisions in 28 states, the District of Columbia, Puerto Rico, and Island Areas. Minor Civil Divisions are defined by U.S. Census Bureau.
MCDName	41	The Minor Civil Division (MCD) name. A Minor Civil Division is a subdivision of a county, such as a township. There are Minor Civil Divisions in 28 states, the District of Columbia, Puerto Rico, and Island Areas. Minor Civil Divisions are defined by U.S. Census Bureau.

Block Address

The BlockLine<1-6> output fields are populated with the input AddressLine<1-6> fields when a match is not made and **Block Address** output data is enabled.

To include block data in the output, set Option.OutputRecordType = B.

If there are any empty lines in the input fields AddressLine1 through AddressLine6, GeocodeUSAddress moves the output lines to the first empty BlockLine output field, eliminating the blank lines.

Response Element	Max. Field Length with null terminator	Description
BlockLine<1-6>	104	When a match is not made, the BlockLine<1-6> output fields are populated with the input AddressLine<1-6> fields. Each BlockLine output field has a maximum field length with null terminator of 104.

Census

Census output fields contain U.S. Census information about the address. To include census data in the output, set Option.OutputRecordType = C.

Note: The following Census output fields - CBSADivisionName, CBSAName, CSAName and USCountyName - are only returned when you set the option Option.OutputVerbose=Y.

Response Element	Max. Field Length with null terminator	Description
APN	46	The assessor's parcel number of the property. The assessor's parcel number is an ID number assigned to a property by the local property tax authority.
BlockSuffix	2	The block suffix for the Census block in which the address is located. A block suffix is a single character assigned to subsections of U.S. Census blocks that are split by a higher-level boundary, such as a municipal boundary. A block suffix is either "A" or "B". For information about U.S. Census block suffixes, see the <i>Geographic Areas Reference</i> <i>Manual</i> , available at the U.S. Census Bureau website: www.census.gov/geo/www/garm.html Block suffixes are only available if you are using Centrus Enhanced data.

Response Element	Max. Field Length with null terminator	Description
CBSACode	6	The code for the Core Based Statistical Area (CBSA) in which the address is located.
		A CBSA is a collective term that refers to both metropolitan and micropolitan areas. A metropolitan area has a population of more than 50,000, and a micropolitan area has a population between 10,000 and 49,999. For more information, see <i>Metropolitan and Micropolitan Statistical Areas</i> section of the U.S. Census Bureau website:
		www.census.gov/population/www/metroareas/metroarea.html
CBSADivisionCode	6	The code of the Core Based Statistical Area (CBSA) division in which the address is located.
		A CBSA division is a metropolitan statistical area with a population of at least 2.5 million that has been subdivided to form smaller groupings of counties referred to as "metropolitan divisions." For more information, see <i>Metropolitan and Micropolitan Statistical Areas</i> section of the U.S. Census Bureau website:
		www.census.gov/population/www/metroareas/metroarea.html
CBSADivisionName	128	The name of the Core Based Statistical Area (CBSA) division in which the address is located.
		A CBSA division is a metropolitan statistical area with a population of at least 2.5 million that has been subdivided to form smaller groupings of counties referred to as "metropolitan divisions." For more information, see <i>Metropolitan and Micropolitan Statistical Areas</i> section of the U.S. Census Bureau website:
		www.census.gov/population/www/metroareas/metroarea.html
		Note: The CBSA division name is only returned if you set the option Option.OutputVerbose=Y.

Response Element	Max. Field Length with null terminator	Description
CBSAMetro	2	Indicates whether the core based statistical area (CBSA) in which the address is located is a metropolitan area or a micropolitan area. One of the following:
		 Y Yes, the address is located in a metropolitan statistical area. Metropolitan areas have a population greater than 50,000.
		N No, the address is not located in a metropolitan area. It is located in a micropolitan area. Micropolitan areas have a population between 10,000 and 49,999.
		null There is no data available to determine whether the address is in a metropolitan or micropolitan area.
		A CBSA is a collective term that refers to both metropolitan and micropolitan areas. A metropolitan area has a population of more than 50,000, and a micropolitan area has a population between 10,000 and 49,999. For more information, see <i>Metropolitan and Micropolitan Statistical Areas</i> section of the U.S. Census Bureau website:
		www.census.gov/population/www/metroareas/metroarea.html
CBSAName	128	The name of the core based statistical area (CBSA) in which the address is located.
		A CBSA is a collective term that refers to both metropolitan and micropolitan areas. A metropolitan area has a population of more than 50,000, and a micropolitan area has a population between 10,000 and 49,999. For more information, see <i>Metropolitan and Micropolitan Statistical Areas</i> section of the U.S. Census Bureau website:
		www.census.gov/population/www/metroareas/metroarea.html
		Note: The CBSA name is only returned if you set the option Option.OutputVerbose=Y.

Response Element	Max. Field Length with null terminator	Descripti	on
CensusBlockID	16	address is which the B data. Cens and other b and the leg information	it identification number of the census block in which the located. Census blocks are the smallest geographic area for Bureau of the Census collects and tabulates decennial census us blocks are formed by streets, roads, railroads, streams bodies of water, other visible physical and cultural features, al boundaries shown on Census Bureau maps. For more about U.S. Census blocks, see the <i>Geographic Areas</i> <i>Manual</i> , available at the U.S. Census Bureau website:
		www.cens	us.gov/geo/www/garm.html
		The Censu	s block ID is in the format:
		sscccttt	tttgbbb
		Where:	
		SS	The two-digit state FIPS code.
		CCC	The three-digit county FIPS code.
		tttttt	The six-digit Census tract FIPS code.
		g	The single-digit block group FIPS code.
		bbb	The block FIPS code.
		ар	te: The value in the CensusBlockID field does not contain eriod for the Census tract FIPS code. This may deviate from industry standard.
CensusTract	7	The six-digit ID of the Census tract in which the address is located. Census tracts are small, relatively permanent geographic entities within counties (or the statistical equivalents of counties). Generally, census tracts have between 2,500 and 8,000 residents and boundaries that follow visible features. For more information about U.S. Census tracts, see the <i>Geographic Areas Reference Manual</i> , available at the U.S. Census Bureau website: www.census.gov/geo/www/garm.html	
CSACode	4	Denotes the code for a geographic entity that consists of 2 or more adjacent CBSAs with employment interchange measures of at least 1	

Response Element	Max. Field Length with null terminator	Description	
CSAName	128	The name of the combined statistical area (CSA) in which the address is located.	
		A CSA is a combination of two or more adjacent Core Based Statistical Areas (CBSAs) with a high employment interchange measure. The employment interchange measure is the sum of the percentage of employed residents of the smaller entity who work in the larger entity and the percentage of the employment in the smaller entity that is accounted for by workers who reside in the larger entity. Pairs of CBSAs with employment interchange measures of at least 25% combine automatically. Pairs of CBSAs with employment interchange measures of at least 15%, but less than 25%, may combine if local opinion in both areas favors combination.	
		Note: The CSA name is only returned if you set the option Option.OutputVerbose=Y.	
USCountyName	128	The name of the county or parish in which the address is located.	
		Note: The county/parish name is only returned if you set the option Option.OutputVerbose=Y.	
USFIPSCountyNumber	4	The three-digit FIPS county code of the county in which the address is located.	
USFIPSStateCode	3	The two-digit FIPS state code of the state in which the address is located.	
USFIPSStateCountyCode	6	The five-digit FIPS code for the state and county in which the address is located.	

Centerline

Centerline Output Fields

Centerline output fields contain information specific to a centerline match. For more information about setting up centerline matching, refer to **Geocoding Options** on page 40. To include centerline fields in the output, set Option.OutputRecordType = N.

Response Element	Max. Field Length with null terminator	Description
CenterlineBearing	6	The compass direction, in decimal degrees, from the point data match to the street centerline match. The compass direction is measured clockwise from 0 degrees north. For example, if the centerline match is directly north of the point match, the centerline bearing would be 0.
CenterlineBlockLeft	16	The Census FIPS Code that indicates the address is on the left side of the street.
CenterlineBlockRight	16	The Census FIPS Code that indicates the address is on the right side of the street.
CenterlineBlockSuffixLeft	2	The block suffix of the block on the left side of the street. A block suffix is a single character assigned to subsections of U.S. Census blocks that are split by a higher-level boundary, such as a municipal boundary. A block suffix is either "A" or "B". For information about U.S. Census block suffixes, see the <i>Geographic Areas Reference</i> <i>Manual</i> , available at the U.S. Census Bureau website: www.census.gov/geo/www/garm.html Block suffixes are only available if you are using Centrus Enhanced data.
CenterlineBlockSuffixRight	2	The block suffix of the block on the right side of the street. A block suffix is a single character assigned to subsections of U.S. Census blocks that are split by a higher-level boundary, such as a municipal boundary. A block suffix is either "A" or "B". For information about U.S. Census block suffixes, see the <i>Geographic Areas Reference</i> <i>Manual</i> , available at the U.S. Census Bureau website: www.census.gov/geo/www/garm.html Block suffixes are only available if you are using Centrus Enhanced data.

Response Element	Max. Field Length with null terminator	Descriptio	n
CenterlineDataCode	3	Indicates th One of the f	e data used to obtain a centerline match for the address. following:
		0	USPS data.
		1	TIGER data.
		2	TomTom data.
		6	HERE data.
		7	TomTom point-level data.
		8	Centrus point-level data.
		9	Auxiliary file data.
		10	User Dictionary.
		11	HERE point-level data.
		12	Master Location data.
		For more inf Databases	formation about these databases, see Enterprise Geocoding on page 5
CenterlineDirection	2	Indicates th	e order of numbers on a segment for a centerline match.
		F	Forward
		R	Reversed
		В	Both
		U	Undetermined
CenterlineDistance	8	Distance, in	feet, from the point-level match to the centerline match.
CenterlineHouseNumberHigh	12	The highest address number in the range of addresses on the street segment. For example, if the address range for the street segment is 1000 to 2000, the CenterlineHouseNumberHigh would be 2000.	
CenterlineHouseNumberLow	12	The lowest address number in the range of addresses on the street segment. For example, if the address range for the street segment is 1000 to 2000, the CenterlineHouseNumberLow would be 1000.	
CentenineHouseNumberLOW	12	segment. Fo	or example, if the address range for the street segmen

Response Element	Max. Field Length with null terminator	Descrip	tion
CenterlineIsAlias	4	Three characters indicating that GeocodeUSAddress located a c match by an index alias. The first is an \mathbb{N} for normal street mat for alias match (including buildings, aliases, firms, etc.). The n characters are:	
		01	Basic index (normal address match)
		02	USPS street name alias index
		03	USPS building index
		04	USPS firm name index
		05	Statewide intersection alias match (when using the Usw.gsi or Use.gsi file)
		06	Spatial data street name alias (when using, the Us_pw.gsi, Us_pe.gsi, Us_psw.gsi, or Us_pse.gsi file is required)
		07	Alternate index (when using Zip9.gsu, Zip9e.gsu, and Zip9w.gsu)
		08	LACS ^{Link}
		09	Auxiliary file match
		10	Centrus Alias index (when using usca.gsi)
		11	POI index (when using poi.gsi)
		12	USPS Preferred Alias
		13	ZIPMove match (when using us.gsz)
		14	Expanded Centroids match (when using us_cent.gsc and/or bldgcent.gsc)
CenterlineLatitude	11	A 7-digit number in degrees and calculated to 4 decimal places for a centerline match. This field is only returned if	
CenterlineLeadingDirectional	3	The street directional that precedes the street name for a centerline match. For example, the N in 138 N Main Street.	
CenterlineLongitude	12	A 7-digit number in degrees and calculated to 4 decimal places (in the format specified) for a centerline match. This field is only returned if	

Response Element	Max. Field Length with null terminator	Description	
CenterlineParity	2	Indicates which side of the street has odd numbers for a centerline match.	
		L	The left side of the street has odd numbers.
		R	The right side of the street has odd numbers.
		в	Both sides of the street have odd numbers.
		U	Undetermined.
CenterlineRoadClass	3	The type of road for a centerline match:	
		1	Major
		2	Minor
CenterlineSegmentCode	11	The unique 10-digit street segment ID assigned by the street network data provider.	
CenterlineStreetName	41	The name of the street.	
CenterlineStreetSuffix	5	The street type of the matched centerline location. For example, AVE in "Washington AVE".	
CenterlineTrailingDirectional	3	The street directional that follows the street name. For example, the N in 456 Washington AVE N.	

Default Output

Default Output Fields

The geocoder always returns fields that contain the latitude/longitude, standardized address, and result indicators. Result indicators describe how well the geocoder matched the input address to a known address and assigned a location. Result indicators also describe the overall status of a match attempt.

Response Element	Max. Field Length with null terminator	Description
AdditionalInputData	61	This field may contain input data that was not used for matching; for example, input address information that appears after a mail stop or attention designator.
AddressLine1	104	The first line of the address. For example: 1 Global View Troy, NY 12180-8371
AddressLine2	104	The second line of the address. For example: 4200 Parliament Pl STE 600 Lanham, MD 20706-1882
City	29	The municipality name.

Response Element	Max. Field Length with null terminator	Description	
Confidence	4	Indicates the confidence in the output provided, from 0 to 100. The higher the score, the higher the probability that the match is correct. If the match is exact, the confidence score is 100. For all other matches, the confidence score is calculated based on which portions of the input address had to be changed to obtain a match. Specifically, the confidence score is calculated by subtracting values from 100 as follows:	
		 If the state is changed to obtain a match: 	
		Added the state -3.75No state -7.5	
		 If the city is changed to obtain a match: 	
		Added city -2.5No city -5.0	
		 If the house number is changed to obtain a match: 	
		Added house number -3.75No house number -7.5	
		 If the street name is changed to obtain a match: 	
		Added street name -3.75No street name -7.5	
		 If the trailing directional is changed to obtain a match: 	
		Added trailing directional -1.25No trailing directional -2.5	
		 If the leading directional is changed to obtain a match: 	
		Added leading directional -1.25No leading directional -2.5	
		 If the street suffix is changed to obtain a match: 	
		Added street suffix -1.25No street suffix -2.5	
		 If the postal code is changed to obtain a match: -11.25 	
		If you have enabled the option to return centroids, the confidence value indicates the type of centroid returned:	
		 60 for a street centroid 50 for a postal code centroid 35 for a city centroid 30 for a county centroid 25 for a state centroid 	

Response Element	Max. Field Length with null terminator	Description	
Country	25	The name of the country. This field always contains United States of America .	
FirmName	41	The name of the business if the address is a business address.	
LastLine	61	The complete last address line (city, state, and postal code).	
Latitude	11	Seven-digit number in degrees and calculated to four decimal places (in the format specified).	
LocationCode	5	A value indicating the accuracy (quality) of the assigned geocode. For more information, see Address Location Codes on page 196.	
Longitude	12	Seven-digit number in degrees and calculated to four decimal places (in the format specified).	
MatchCode	5	Indicates the portions of the address that matched to the geocoding directory file. For more information, see Match Codes on page 188.	
PBKey	13	A unique address identifier that is returned when an address match is made using the Master Location Dataset. The pbKey [™] unique identifier is used as a lookup key to a GeoEnrichment dataset, in order to return attribute data for the match.	
PostalCode	10	Nine-digit ZIP Code with or without a hyphen.	
PostalCode.AddOn	5	Four-digit ZIP Code extension.	
PostalCode.Base	6	Five-digit ZIP Code.	

Response Element	Max. Field Length with null terminator	Description		
ProcessedBy	4	The underlying software that processed the request. EnterpriseGeocoding for GeocodeUSAddress.		
StateProvince	3	Two-character state abbreviation.		
Status	2	Reports the success or fai	lure of the match attempt	
		null	Success	
		F	Failure	
Status.Code	23	If GeocodeUSAddress could not process the address, this field will sho the reason. • Internal System Error • No Geocode Found • Insufficient Input Data		
Status.Description	128	If GeocodeUSAddress could not process the address, this field will sl a description of the failure. Problem + explanation Returned when Status.Code = Interna		
			System Error.	
		Geocoding Failed	Returned when Status.code = No Geocode Found.	
		No location returned	Returned when Status.code = No Geocode Found.	

Response Element	Max. Field Length with null terminator	Description	
StreetDataType	20	The data set used to geocode	the address.
		USPS	USPS
		TIGER	TIGER
		томтом	TomTom Streets data set
		SANBORN POINT DATA	Sanborn Points data set
		NAVTEQ	NAVTEQ/HERE Streets data set
		TOMTOM POINT DATA	TomTom Points data set
		AUXILIARY	Auxiliary file
		CENTRUS POINT DATA	Centrus Points data set
		USER DICTIONARY	User Dictionary
		NAVTEQ POINT DATA	NAVTEQ/HERE Points data set
		MASTER LOCATION	Master Location Data
StreetSide	2	Indicates the side of the street the address range occupies. One of following:	
		L The address rang	e occupies the left side of the street.
		R The address rang	e occupies the right side of the street.
		B The address range	e occupies both sides of the street.
		U Undetermined.	
USUrbanName	31	Urbanization name. Used for addresses in Puerto Rico.	

DPV

DPV data output fields contain information about a match made using DPV data. GeocodeUSAddress only returns values when matching against DPV data. To include DPV data in the output, set Option.OutputRecordType = D.

Response Element	Max. Field Length with null terminator	Description	
CMRA	2	Indicates whether the address is for a Commercial Mail Receiving Agent (CMRA). A CMRA is a private company that rents out mailboxes. A customer of a commercial mail receiving agency can receive mail and other deliveries at the street address of the CMRA rather than the customer's own street address. Depending on the agreement between the customer and the CMRA, the CMRA can forward the mail to the customer or hold it for pickup.	
		Y Yes, the address is a CMRA.	
		 No, the address is not a CMRA. null DPV data is not available. DPV data is required to determine if an address is a CMRA. 	
DPV	2	Indicates whether the address is confirmed to be a deliverable addr by USPS Delivery Point Validation (DPV).	
		Ν	Nothing confirmed
		Y	Everything confirmed (ZIP+4, primary, and secondary)
		S	ZIP+4 and primary (house number) confirmed
		D	ZIP+4 and primary (house number) confirmed and a default match
		U	Non-matched input address to USPS ZIP+4 data, or DPV data not loaded

Response Element	Max. Field Length with null terminator	Description
DPVFootnote	3 per footnote	Contains detailed information about the address. The DPV footnote codes are combined together consecutively. DPV footnotes include: • FOOTNOTE1 provides information about the matched DPV records. • AA—ZIP+4 matched record • A1—Failure to match a ZIP+4 record • null—Address not presented to hash table or DPV data not loaded • FOOTNOTE2 provides information about the matched DPV records. • BB—All DPV categories matched • CC—Matched primary/house number, where the secondary/unit number did not match (present but invalid) • M1—Missing primary/house number • M3—Invalid primary/house number • N1—Matched primary/house number • P1—Missing PS, RR, or HC Box number • P1—Missing PS, RR, or HC Box number • F1—All military addresses • G1—All general delivery addresses • U1—All unique ZIP Code addresses • null—Address not presented to hash table or DPV data not loaded • FOOTNOTE3 provides information about the matched DPV records.
		 R1—Matched CMRA, without a present secondary/unit number RR—Matched CMRA null—Address not presented to hash table or DPV data not loaded Note: A unique ZIP Code is a ZIP Code assigned to a company, agency, or entity with sufficient mail volume to have its own ZIP Code.

Geoconfidence

Geoconfidence data output fields contain information about the type of geoconfidence polygon returned. To include geoconfidence fields in the output, set Option.OutputRecordType = Z.

Response Element	Max. Field Length with null terminator	Description	
GeoConfidenceCode	13	The value returned type has been retu	I in this field indicates which geoconfidence surface rned.
		The possible value	es are:
		INTERSECTION	A geocode point for the intersection of two streets.
		ADDRESS	An array of street segment points representing the street segment where the address is located.
		POINT	If the geocoder was able to match the address using point data, the point geometry where the address is located.
		POSTAL1	A geocode point for the ZIP centroid.
		POSTAL2	An array of points for all street segments in the ZIP + 2 in which the address is located.
		POSTAL3	An array of points for street segments in the ZIP + 4 in which the address is located.
		ERROR	An error has occurred.
StreetSegmentPoints	1024	An array of latitude points.	/longitude values that represent the street segment
		Note: This	s field contains values only if the
			EidenceCode field returns a value of ADDRESS, 2, or POSTAL3.
GeoConfidenceCentroidLatitude	11	The latitude of the centroid of the geoconfidence polygon.	
GeoConfidenceCentroidLongitude	12	The longitude of the centroid of the geoconfidence polygon.	

Latitude/Longitude

The latitude/longitude output fields contain the geographic coordinates of the address. To include latitude/longitude output fields in the output, set Option.OutputRecordType = L.

Response Element	Max. Field Length with null terminator	Description
Elevation	11	The location's elevation in feet above or below sea level.
Latitude	11	The latitude of the address. The latitude is a seven-digit number in degrees, calculated to six decimal places.
Longitude	12	The longitude of the address. The longitude is a seven-digit number in degrees, calculated to six decimal places.

Parsed Elements

The parsed elements output fields contain standard address information as individual units, such as street suffixes (for example AVE, ST, or RD) and leading directionals (for example N and SE). To include parsed elements in the output, set Option.OutputRecordType = E.

Response Element	Max. Field Length with null terminator	Description
ApartmentLabel	5	The type of unit, such as apartment, suite, or lot.
ApartmentLabel2	5	The type of unit, such as apartment, suite, or lot, for addresses that contain two units, such as: 123 E Main St APT 3, 4th Floor .
ApartmentNumber	12	Apartment number. For example: 123 E Main St APT 3
ApartmentNumber2	12	Secondary apartment number. For example: 123 E Main St APT 3, 4th Floor

Response Element	Max. Field Length with null terminator	Description
CrossStreetLeadingDirectional	3	Leading directional, for example: 123 E Main St Apt 3
		Note: Cross street information is only returned if you entered an intersection as an address. For example, entering Pearl and 28th, Boulder, CO returns cross street information. Entering 2800 Pearl, Boulder, CO does not return cross street information.
CrossStreetName	41	Name of cross street.
		Note: Cross street information is only returned if you entered an intersection as an address. For example, entering Pearl and 28th, Boulder, CO returns cross street information. Entering 2800 Pearl, Boulder, CO does not return cross street information.
CrossStreetSuffix	5	Street suffix, for example: 123 E Main St Apt 3
		Note: Cross street information is only returned if you entered an intersection as an address. For example, entering Pearl and 28th, Boulder, CO returns cross street information. Entering 2800 Pearl, Boulder, CO does not return cross street information.
CrossStreetTrailingDirectional	3	Trailing directional, for example: 123 Pennsylvania Ave NW
		Note: Cross street information is only returned if you entered an intersection as an address. For example, entering Pearl and 28th, Boulder, CO returns cross street information. Entering 2800 Pearl, Boulder, CO does not return cross street information.
HouseNumber	12	Building number for the address.
HouseNumber2	12	If an address consists of a range of house numbers, this field contains the second house number. The HouseNumber field contains the first number. For example, given this address:
		5-7 Maple Ave.
		The HouseNumber field would contain "5" and the HouseNumber2 field would contain "7".

Response Element	Max. Field Length with null terminator	Description	
LeadingDirectional	3	Leading directional, for example: 123 E Main St Apt 3	
PrivateMailbox	9	Private mailbox. Not returned for multiline input.	
PrivateMailbox.Designator	5	Private mailbox description. Not returned for multiline input.	
RRHC	2	Rural Route/Highway Contract portion of the address.	
StreetName	41	The name of the street, not including any directionals or suffixes. I example, the word "Main" in this address: 123 E Main St Apt 3	
StreetSuffix	5	The street type of the matched location. For example, AVE for Avenue.	
TrailingDirectional	3	Street directional that follows the street name. For example, the N in 456 Washington N.	

Postal Data

Postal data output fields contain detailed postal information for the address, such as the preferred city name and the US carrier route. To include postal data fields in the output, set Option.OutputRecordType = P.

Response Element	Max. Field Length with null terminator	Description
CityPreferredName	29	The $USPS^{\texttt{B}}$ preferred city name for the ZIP Code of the address.

Response Element	Max. Field Length with null terminator	Description	
CityShortName	29	The USPS [®] -approved abbreviation for the city, if there is one. The USPS provides abbreviations for city names that are 14 characters long or longer. City abbreviations are 13 characters or less and can be used when there is limited space on the mailing label. If there is no short cit name for the city, then the full city name is returned.	
CityStateRecordName	29	USPS [®] ci	ty state city name.
DeliveryPointCode	3	Two-digit	delivery point barcode.
GovernmentBuilding	2	Indicates	if a building is used by the city, state, or federal government.
		Α	City government building
		в	Federal government building
		С	State government building
		D	Firm only
		Е	City government building and firm only
		F	Federal government building and firm only
		G	State government building and firm only
			es A, B, C, E, F, and G are valid for Alternate records only. The valid for both base and alternate records.
PostalBarCode	7	Six-digit combination of ZIP+4 Code and the delivery point barcoc	
PostalCodeClass	2	ZIP Class	ification code.
		null	Standard ZIP Code
		Μ	Military ZIP Code
		Ρ	ZIP Code has P.O. boxes only
		U	Unique ZIP Code (ZIP Code assigned to a single organization)

Response Element	Max. Field Length with null terminator	Descrip	tion
PostalCodeUnique	2		if the ZIP Code is a unique ZIP Code assigned to an individual or agency.
		Y	Unique ZIP name
		null	No unique ZIP name
PostalFacility	2	USPS Cit	ty State Name Facility code.
		Α	Airport Mail Facility (AMF)
		в	Branch
		С	Community Post Office (CPO)
		D	Area Distribution Center (ADC)
		Е	Sectional Center Facility (SCF)
		F	Delivery Distribution Center (DDC)
		G	General Mail Facility (GMF)
		к	Bulk Mail Center (BMC)
		М	Money Order Unit
		N	Non-Postal Community Name, Former Postal Facility, or Place Name
		Р	Post Office
		S	Station
		U	Urbanization
USBCCheckDigit	2	Check-di	git for delivery point barcode.
USCarrierRouteCode	5	Carrier Route code.	

Response Element	Max. Field Descri Length with null terminator		Length with null		Description		
USCarrierRouteSort	2		es if the USPS uses a carrier route sort, and what type of sort PS allows.				
		Α	Automation cart allowed, optional cart merging allowed				
		в	Automation cart allowed, no optional cart merging allowed				
		С	No automation cart allowed, optional cart merging allowed				
		D	No automation cart allowed, no optional cart merging allowed				
USCityDelivery	2	Indicate	es if has city-delivery carrier routes.				
		Y	Has city-delivery carrier routes				
		Ν	Does not have city-delivery carrier routes.				
USLACS	2	Indicate	es if LACS ^{Link} match occurred.				
		Y	Matched LACS ^{Link} record				
		Ν	LACS ^{Link} match not found				
		F	False-positive LACS ^{Link} record				
		S	Secondary information (unit number) removed to make a LACS ^{Link} match				
		null	Records not processed through LACS ^{Link}				
			re information, see Locatable Address Conversion System on page 21.				
USLACS.ReturnCode	3	Indicate	es LACS ^{Link} results.				
		Α	Matched LACS ^{Link} record				
		00	LACS ^{Link} match was not found				
		09	Matched to highrise default, but noLACS ^{Link} conversion				
		14	Found LACS ^{Link} match, but no LACS ^{Link} conversion				
		92	Secondary information (unit number) was removed to make a LACS ^{Link} match				
		null	Records not processed through LACS ^{Link}				
			re information, see Locatable Address Conversion System on page 21.				

Response Element	Max. Field Length with null terminator	Description
USLOTCode	2	A combination of the 4-digit Line of Travel (LOT) Code and the ascending (A) or descending (D) indicator.

Qualifiers

Qualifier output fields contain qualification information about the match, such as the location code and the match code. To include postal data fields in the output, set Option.OutputRecordType = Q.

Response Element	Max. Field Des Length with null terminator		ription	
AddressLineResolved	5	For two-line addresses, indicates which address line was used to obtain the match.		
		0	The address could not be matched, or the address matched to multiple addresses.	
		1	AddressLine1 was used to obtain the match.	
		2	AddressLine2 was used to obtain the match.	
		3	Both address lines were used in their original order.	
		4	Both address lines were used but the order of the lines was switched to obtain the match.	
		5	The input address was a one line address.	
CountryLevel	2	return is suffi postal	ategory of the postal data used to validate the address. Always s "A" for U.S. addresses. Category A means that the postal data icient to validate and correct addresses, including providing missing code, city name, state/county name, street address elements, puntry name.	
DatabaseVersion			ublish date of the USPS data used to validate the address, in the t Month Year.	

Response Element	Max. Field Length with null terminator	Description		
EWSMatch	2		whether the address was not matched because it is in the rning System (EWS) data.	
		Y	The address matched to an address in the EWS data so the match was denied.	
		null	The address did not match to an address in the EWS data.	
ExpirationDate	11	Date the o	database expires, in the format MM/DD/YYYY.	
Geocoder.MatchCode	4	N th In a ge	how closely the input address matches the candidate address. ote: The match codes returned in this field are different from ne match codes described in Match Codes on page 188. Instead, the match codes returned in this field are taken from set of match codes that are compatible with all other country eccoders. For more information, see Result Codes for international Geocoding.	
GeoStanMatchScore	13	Record m	atching score (for multimatches only).	
Intersection	2	Indicates	if the input address matched to a cross-street.	
		т	True	
		F	False	

Response Element	Max. Field Length with null terminator	Descr	iption	
IsAlias	4	Returns for alias	es whether the address matched an index alias in the postal data. s three characters. The first is an \mathbb{N} for normal street match or \mathbb{A} s match (including buildings, aliases, firms, etc.). The next two ers are:	
		01	Basic index (normal address match)	
		02	USPS street name alias index	
		03	USPS building index	
		04	USPS firm name index	
		05	Statewide intersection alias match	
		06	Spatial data street name alias	
		07	Alternate index	
		08	LACS ^{Link}	
		09	Auxiliary file match	
		10	Centrus Alias index (when using usca.gsi)	
		11	POI index (when using poi.gsi)	
		12	USPS Preferred Alias	
		13	ZIPMove match (when using us.gsz)	
		14	Expanded Centroids match (when using us_cent.gsc and/or bldgcent.gsc)	
IsCloseMatch	2	Indicates whether or not the address was a unique match or if there were candidate addresses.		
		Y	Yes, the address is a close match. This field always contains "Y" if there is only one match.	
		N	No, the address is not a close match. The record is a candidate.	
LACSAddress	2		es if the input address was converted due to the Locatable s Conversion System (LACS).	
		L	Converted	
		null	Not converted	

Response Element	Max. Field Length with null terminator	Description	
LocationCode.Description	128	LocationCode converted to text. Only returned when you set the configuration options to return additional descriptions (verbose).	
MatchCode.Description	128	MatchCode converted to text. Only returned when you set the configuration options to return additional descriptions (verbose).	
RecordType	18	Indicates the record type: • GeneralDelivery • HighRise • FirmRecord • Normal • PostOfficeBox • RRHighwayContract • Geographic (non USPS TIGER match) • Auxiliary (match to an auxiliary file)	
RecordType.Default	2	Indicates type RRHighwayC Y N U	e of match that occurred for the record type HighRise or contract: Default match Exact match Not matched

Response Element	Max. Field Length with null terminator	Description	
StreetDataCode	3	Indicates the da	ata used to geocode the address. One of the following:
		0	USPS data
		1	TIGER data
		2	TomTom data
		6	HERE data
		7	TomTom point-level data
		8	Centrus point-level data
		9	Auxiliary file data
		10	User Dictionary
		11	HERE point-level data
		12	Master Location Data
		For more information about these databases, see Enterprise Databases on page 5.	
StreetDataType	20		ata initially used for the match attempt. Note that the eetDataCode shows which data was actually used to h.
		StreetDataCode For example, if first attempt a m type of match. I GeocodeUSAd made using stre	ted in StreetDataType may be different from that in e if a match cannot be made in the initial match attempt. a points database is loaded, GeocodeUSAddress will natch to the point data because this is the most accurate f a point-level match cannot be made, dress will attempt to match to street data. If the match is eet data, then the SreetDataType would indicate the and the StreetDataCode would indicate the street data.
		For more inforn Addresses on	nation, see How GeocodeUSAddress Processes page 36.

Range

Range output fields contain information about the street range, such as the high and low unit numbers. To include range data fields in the output, set Option.OutputRecordType = R.

Response Element	Max. Field Length with null terminator	Description	
Alternate	2	 USPS code that specifies whether a record is a base or alternate record. B Base record. Base records can represent a range of addresses or an individual address, such as a firm record. 	
		A Alternate record. Alternate records are individual delivery points.	
HouseNumberHigh	12	The highest house number in the range.	
HouseNumberLow	12	The lowest house number in the range.	
HouseNumberParity	2	Indicates if the house number range contains even or odd numbers. E Even O Odd	
		B Both	
PostalCodeExtensionHigh	5	The highest four-digit ZIP Code extension in the range. The ZIP Code extension is the four digits at the end of the ZIP Code. For example: 60510- 1134 .	
PostalCodeExtensionLow	5	The lowest four-digit ZIP Code extension in the range. The ZIP Code extension is the four digits at the end of the ZIP Code. For example: 60510- 1134 .	
UnitNumberHigh	12	The highest unit number in the range.	
UnitNumberLow	12	The lowest unit number in the range.	

Response Element	Max. Field Length with null terminator	Description	
UnitNumberParity	2	Indicates if the unit num	ber range contains even or odd numbers.
		E	Even
		0	Odd
		В	Both

Segment

Segment output fields contain information about the street segment identified by the data provider. To include segment data fields in the output, set Option.OutputRecordType = S.

Response Element	Max. Field Length with null terminator	Description
BlockLeft	16	The Census FIPS Code that indicates the address is on the left side of the street.
BlockRight	16	The Census FIPS Code that indicates the address is on the right side of the street.
BlockSuffixLeft	2	The block suffix of the block on the left side of the street. A block suffix is a single character assigned to subsections of U.S. Census blocks that are split by a higher-level boundary, such as a municipal boundary. A block suffix is either "A" or "B". For information about U.S. Census block suffixes, see the <i>Geographic Areas Reference</i> <i>Manual</i> , available at the U.S. Census Bureau website: www.census.gov/geo/www/garm.html Block suffixes are only available if you are using Centrus Enhanced data.

Response Element	Max. Field Length with null terminator	Description	
BlockSuffixRight	2	A block suffix i Census blocks municipal bour about U.S. Cer	x of the block on the right side of the street. s a single character assigned to subsections of U.S. that are split by a higher-level boundary, such as a ndary. A block suffix is either "A" or "B". For information hsus block suffixes, see the <i>Geographic Areas Reference</i> ble at the U.S. Census Bureau website:
			gov/geo/www/garm.html are only available if you are using Centrus Enhanced
PointCode	11	Unique point ID of the matched record when matched to point-level dat <i>Blank</i> if the matched record is not from point-level data.	
RoadClass	3	The type of roa 1 2	ad: Major Minor
SegmentCode	11	The unique 10 data provider.	-digit street segment ID assigned by the street network
SegmentDirection	2	Indicates the o F R B U	rder of numbers on a segment. Forward Reversed Both Undetermined
SegmentHouseNumberHigh	12	The highest house number in the segment.	
SegmentHouseNumberLow	12	The lowest house number in the segment.	
SegmentLength		The length, in feet, of a block segment. This field is deprecated.	

Response Element	Max. Field Length with null terminator	Descriptio	on
SegmentParity	2	Indicates w	hich side of the street has odd numbers.
		L	Left side of the street
		R	Right side of the street
		в	Both sides of the street
		U	Undetermined
StreetSide.NAVTEQ	2	Indicates which side of the street the address is located on. The value in this field is determined by using the NAVTEQ/HERE reference nodes for the street segment. A street segment represents part of a street. Each segment has a node at each end: the reference node and the non-reference node. The reference node is the node with the lower latitude (southernmost). If the latitudes of both nodes are identical, the reference node is the end node with the lower longitude (westernmost). The street side corresponds to the street sides you would see if you were standing at the reference node and looking at the non-reference node.	
		One of the	-
		L	The address is on the left side of the street.
		R	The address is on the right side of the street.
		В	The address occupies both sides of the street.
		U	The street side is unknown.
			NAVTEQ/HERE data was not used, or segment output data was not selected, or the address did not match a street segment (for example, the address was geocoded to a centroid).

3 - ReverseAPNLookup

ReverseAPNLookup allows you to look up an address using:

- An Assessor's Parcel Number (APN). An APN is an ID number assigned to a piece of land by a county assessor. An APN is unique only within a county.
- A FIPS county code. A Federal Information Processing Standard (FIPS) code is an ID number assigned to a county by the U.S. Federal government.
- A FIPS state code. A FIPS state code is an ID number assigned to each state by the U.S. Federal government.

These three pieces of information, used together, can uniquely identify a specific parcel. You must use all three pieces of information to perform a lookup using ReverseAPNLookup.

Note: ReverseAPNLookup only works for U.S. addresses for which APN data is available, such as Centrus Enhanced or Centrus Premium Points. See the coverage map included with the points database for more information.

ReverseAPNLookup is part of the Enterprise Geocoding Module. For more information about the Enterprise Geocoding Module, see Enterprise Geocoding Module on page 4.

In this section

ReverseAPNLookup	101
Request	103
Response	105

ReverseAPNLookup

Resource URL

JSON endpoint:

http://server:port/rest/ReverseAPNLookup/results.json

XML endpoint:

```
http://server:port/rest/ReverseAPNLookup/results.xml
```

Example with JSON Response

The following example requests a JSON response:

```
http://myserver:8080/rest/ReverseAPNLookup/results.json?
Data.APN=12-21-405-011&Data.USFIPSStateCode=17&Data.USFIPSCountyNumber=089
```

The JSON returned by this request would be:

```
{"output port": [{
  "USFIPSCountyNumber": "089",
  "USFIPSStateCode": "17",
  "Latitude": "41.846399",
  "Longitude": "-88.325771",
  "StreetSide": "L",
  "Distance": "",
  "PercentGeocode": "",
  "FirmName": "",
  "AddressLine1": "1012 Main St",
  "AddressLine2": "",
  "LastLine": "Batavia, IL 60510-1602",
  "AdditionalInputData": "",
  "City": "Batavia",
  "StateProvince": "IL",
  "PostalCode.Base": "60510",
  "PostalCode.AddOn": "1602",
  "PostalCode": "60510-1602",
  "USUrbanName": "",
  "Country": "United States of America",
  "LocationCode": "AP02",
  "MatchCode": "P01",
  "StreetDataType": "CENTRUS POINT DATA",
  "APN": "12-21-405-011",
  "Confidence": "95",
  "ProcessedBy": "KGL",
```

```
"Status": "",
"Status.Code": "",
"Status.Description": "",
"user_fields": []
}]}
```

Example with XML Response

The following example requests an XML response:

```
http://myserver:8080/rest/ReverseAPNLookup/results.xml?
Data.APN=12-21-405-011&Data.USFIPSStateCode=17&Data.USFIPSCountyNumber=089
```

The XML returned by this request would be:

```
<xml.ReverseAPNLookupResponse</pre>
xmlns="http://www.pb.com/spectrum/services/ReverseAPNLookup">
   <output port>
      <Address>
         <USFIPSCountyNumber>089</USFIPSCountyNumber>
         <USFIPSStateCode>17</USFIPSStateCode>
         <Latitude>41.846399</Latitude>
         <Longitude>-88.325771</Longitude>
         <StreetSide>L</StreetSide>
         <Distance/>
         <PercentGeocode/>
         <FirmName/>
         <AddressLine1>1012 Main St</AddressLine1>
         <AddressLine2/>
         <LastLine>Batavia, IL 60510-1602</LastLine>
         <AdditionalInputData/>
         <City>Batavia</City>
         <StateProvince>IL</StateProvince>
         <PostalCode.Base>60510</PostalCode.Base>
         <PostalCode.AddOn>1602</PostalCode.AddOn>
         <PostalCode>60510-1602</PostalCode>
         <USUrbanName/>
         <Country>United States of America</Country>
         <LocationCode>AP02</LocationCode>
         <MatchCode>P01</MatchCode>
         <StreetDataType>CENTRUS POINT DATA</StreetDataType>
         <APN>12-21-405-011</APN>
         <Confidence>95</Confidence>
         <ProcessedBy>KGL</ProcessedBy>
         <Status/>
         <Status.Code/>
         <Status.Description/>
         <user fields/>
      </Address>
   </output port>
</xml.ReverseAPNLookupResponse>
```

Request

Input

Reverse APNLookup Input Data

ReverseAPNLookup takes an APN, FIPS county code, and FIPS state code as input. The following table provides information about the format and layout of the input.

Parameter	Format	Description
Data.APN	String [45]	The assessor's parcel number (APN) for the property you want to look up.
Data.InputKeyValue	String	User-defined data, such as a record ID or source code.
Data.USFIPSCountyNumber	String [5]	The FIPS county code for the county in which the property resides.
Data.USFIPSStateCode	String [2]	The FIPS state code for the state in which the property resides.

Input Parameters

The following table lists the options that control ReverseAPNLookup processing.

Note: As the Enterprise Geocoding Module transitions its administrative tasks to a web-based Management Console, labels for the options may use different wording than what you see in Enterprise Designer. There is no difference in behavior.

Parameter	Description			
Option.Dataset	Specifies the database to use to look up the parcel. Use the database name specified in Management Console's Spectrum Databases page.			
Option.LatLongFormat	Specifi	es the format for returned latitude/longitude.		
	Decim	nal (90.00000-180.00000) Default.		
	Intege	er (9000000-18000000)		
Option.RetrieveElevation	is the d	es whether ReverseAPNLookup returns the elevation of the address. Elevation istance above or below sea level of a given location. The elevation is returned Elevation output field, which is part of the Latitude/Longitude output group.		
	Note: This option requires that you have licensed and installed the Centrus Premium Points database. Elevation data is not available for all addresses. See the coverage map included with the points database.			
	Y	Return elevation data.		
	N	Do not return elevation data. Default.		
Option.OutputCasing	Specifies the casing of the output data.			
	М	Returns the output in mixed case. Default. For example:		
		123 Main St Mytown FL 12345		
	U	Returns the output in upper case. For example:		
		123 MAIN ST MYTOWN FL 12345		
Option.OutputVerbose	output. examp of the a	es whether ReverseAPNLookup provides an additional description field as This field provides the text equivalent to a field represented by a code. For le, LocationCode returns a code that indicates the accuracy (quality) assigned geocode. LocationCode.Description provides the otion for the code returned.		
	Y	Include verbose fields.		
	N	Do not include verbose fields. Default.		

Parameter	Description			
Option.OutputRecordType	Specifies optional data to include in the output. Note that ReverseAPNLookup always returns the default data listed in Default Output on page 108. The data you select here is returned with the default output data.			
	 C—Census L—Latitude/Longitude E—Parsed Elements Q—Qualifiers R—Range S—Segment 			
	For a list of fields included in each record type, see Response on page 105. If you do not want all of the fields in a group returned, do not select the group, and instead list only those fields you want returned in Option.OutputFields.			
Option.OutputFields	Indicates the individual output fields you want returned. List fields with a pipe () between each field. You can use this field instead of the			
	Option.OutputRecordType field to limit the output to the specific fields you want.			
	Default list: AddressLine1 LastLine Longitude Latitude MatchCode LocationCode			

Response

ReverseAPNLookup always returns a default set of output fields that contain the address, geocode, and result indicators. For information about these fields, see **Default Output** on page 108. You can also choose to include optional categories of output data.

Census

Census output fields contain U.S. Census information about the address. To include census data in the output, set Option.OutputRecordType = C.

Note: The following Census output fields - CBSADivisionName, CBSAName, CSAName and USCountyName - are only returned when you set the option Option.OutputVerbose=Y.

Response Element	Max. Field Length with null terminator	Description	
BlockSuffix	2	Single character block suffix for split Census blocks. Returns A or B. Only available in Centrus Enhanced data.	
CBSACode	6	Indicates Co	ore Based Statistical Area (CBSA).
CBSADivisionCode	6	Denotes a s	ubdivision of a CBSA.
CBSADivisionName	128	The name of the Core Based Statistical Area (CBSA) division in w the address is located. A CBSA division is a metropolitan statistical area with a populatio at least 2.5 million that has been subdivided to form smaller group of counties referred to as "metropolitan divisions." For more informa see <i>Metropolitan and Micropolitan Statistical Areas</i> section of the Census Bureau website:	
		www.censu	s.gov/population/www/metroareas/metroarea.html
		Not	e: The CBSA division name is only returned if you set the on Option.OutputVerbose=Y.
CBSAMetro	2	Metropolitar	n Statistical Area. Valid values include:
		Y	Metro statistical area
		Ν	Micro statistical area
		null	Data unavailable
CBSAName	128	The name of is located.	f the core based statistical area (CBSA) in which the address
		micropolitar 50,000, and 49,999. For	a collective term that refers to both metropolitan and a areas. A metropolitan area has a population of more than a micropolitan area has a population between 10,000 and more information, see <i>Metropolitan and Micropolitan</i> <i>reas</i> section of the U.S. Census Bureau website:
		www.censu	s.gov/population/www/metroareas/metroarea.html
			e: The CBSA name is only returned if you set the option tion.OutputVerbose=Y.

Response Element	Max. Field Length with null terminator	Description
CensusBlockID	16	The ID of the Census Federal Information Processing Standard (FIPS) code.
CensusTract	7	Six digits extracted from the CensusBlockID.
CSACode	4	Denotes the code for a geographic entity that consists of 2 or more adjacent CBSAs with employment interchange measures of at least 15.
CSAName	128	The name of the combined statistical area (CSA) in which the address is located.
		A CSA is a combination of two or more adjacent Core Based Statistical Areas (CBSAs) with a high employment interchange measure. The employment interchange measure is the sum of the percentage of employed residents of the smaller entity who work in the larger entity and the percentage of the employment in the smaller entity that is accounted for by workers who reside in the larger entity. Pairs of CBSAs with employment interchange measures of at least 25% combine automatically. Pairs of CBSAs with employment interchange measures of at least 15%, but less than 25%, may combine if local opinion in both areas favors combination.
		Note: The CSA name is only returned if you set the option Option.OutputVerbose=Y.
USCountyName	128	The name of the county or parish in which the address is located.
		Note: The county/parish name is only returned if you set the option Option.OutputVerbose=Y.
USFIPSStateCountyCode	6	Five-digit FIPS code for state and county extracted from the CensusBlockID.

Default Output

Default Output Fields

ReverseAPNLookup always returns the address, geocode, and result indicators.

Response Element	Max. Field Length with null terminator	Description
AdditionalInputData	61	This field may contain input data that was not used for matching; for example, input address information that appears after a mail stop or attention designator.
AddressLine1	104	First line of the address.
AddressLine2	104	Second line of the address.
APN	46	The Assessor's Parcel Number that was specified in the input.
City	29	Municipality name.
Confidence	4	Indicates the confidence in the output provided. The range is from 0 (zero) to 100, with 0 being no match and 100 being an exact match.
Country	25	The name of the country. Since ReverseAPNLookup only works for U.S. locations, this field will always contain United States of America .
Distance	8	The distance, in feet, from the input geocode to nearest matched address or intersection.
Elevation	11	The distance in feet above or below sea level of the parcel.
FirmName	41	Name of the company.

Response Element	Max. Field Length with null terminator	Description
LastLine	61	Complete last address line (municipality, state, and postal code).
Latitude	11	Seven-digit number in degrees and calculated to 4 decimal places (in the format specified).
LocationCode	5	Indicates the accuracy (quality) of the assigned geocode. For more information, see Address Location Codes on page 196.
Longitude	12	Seven-digit number in degrees and calculated to 4 decimal places (in the format specified).
MatchCode	5	Indicates the portions of the address that matched to the directory file. For more information, see Match Codes on page 188.
PercentGeocode	6	The percent along the street segment that matches the geocode. For example, if the returned geocode falls 1/3 along the way of the entire street segment, the percent is 33.000. Note: This value is always 0.0 for matches to point-level data and intersections.
PostalCode	10	Nine-digit ZIP Code with or without a hyphen.
PostalCode.AddOn	5	Four-digit ZIP Code extension.
PostalCode.Base	6	Five-digit ZIP Code.
ProcessedBy	4	The feature code for the stage that processed the request. The value is EnterpriseGeocoding for ReverseAPNLookup.
StateProvince	3	Two-character state abbreviation.

Response Element	Max. Field Length with null terminator	Description	
Status	2	Reports the success or fai	lure of the match attempt
		null	Success
		F	Failure
Status.Code	23	Reason for failure:	
		 Internal System Error No Address Found Insufficient Input Data 	
Status.Description	128	Description of the problem	:
		Problem + explanation	Returned when Status.Code = Internal System Error.
		Geocoding Failed	Returned when Status.code = No Address Found.
		No location returned	Returned when Status.code = No Address Found.
StreetDataType	20	The data set that Reverse	APNLookup attempted to match against.
		USPS	USPS
		TIGER	TIGER
		томтом	TomTom Streets data set
		SANBORN POINT DATA	Sanborn Points data set
		NAVTEQ	NAVTEQ Streets data set
		TOMTOM POINT DATA	TomTom Points data set
		AUXILIARY	Auxiliary file
		CENTRUS POINT DATA	Centrus Points data set
		USER DICTIONARY	User Dictionary
		NAVTEQ POINT DATA	NAVTEQ/HERE Points data set
		MASTER LOCATION	Master Location Data

Response Element	Max. Field Length with null terminator	Description	
StreetSide	2	Indicates the side of the street the range occupies. One of the following:	
		L The range occupies the left side of the street.	
		R The range occupies the right side of the street.	
		B The range occupies both sides of the street.	
		U Undetermined.	
USFIPSCountyNumber	4	Three-digit FIPS county code specified in the input.	
USFIPSStateCode	3	Two-digit FIPS state code specified in the input.	
USUrbanName	6	USPS [®] urbanization name. Puerto Rican addresses only.	

Latitude/Longitude

The latitude/longitude output fields contain the geographic coordinates of the location. To include latitude/longitude output fields in the output, set Option.OutputRecordType = L.

Response Element	Max. Field Length with null terminator	Description
Latitude	11	7-digit number in degrees and calculated to 4 decimal places (in the format specified).
Longitude	12	7-digit number in degrees and calculated to 4 decimal places (in the format specified).

Parsed Elements

1

The Parsed Elements output fields contain standard address information as individual units, such as street suffixes (AVE) and leading directionals (N and SE). To include parsed elements in the output, set Option.OutputRecordType = E.

Response Element	Max. Field Length with null terminator	Description	
ApartmentLabel	5	Apartment designator (such as STE or APT), for example: 123 E Main St. APT 3	
ApartmentLabel2	5	Secondary apartment designator, for example: 123 E Main St. APT 3, 4th Floor	
ApartmentNumber	12	Apartment number, for example: 123 E Main St. APT 3	
ApartmentNumber2	12	Secondary apartment number, for example: 123 E Main St. APT 3, Floor	
City	29	Municipality name.	
CrossStreetLeadingDirectional	3	Leading directional, for example: 123 E Main St. Apt 3	
CrossStreetName ¹	41	Cross street name, for example: 123 E Main St. Apt 3	
CrossStreetSuffix	5	Cross street suffix, for example: 123 E Main St. Apt 3	
CrossStreetTrailingDirectional	3	Cross street trailing directional, for example: 123 Pennsylvania Ave NV	

ReverseAPNLookup only returns Cross street outputs if you entered an intersection as an address. For example, entering Pearl and 28th, Boulder, CO returns cross street information. Entering 2800 Pearl, Boulder, CO does NOT return cross street information.

Response Element	Max. Field Length with null terminator	Description	
HouseNumber	12	Building number, for example: 123 E Main St. Apt 3 Note: This is an approximate building number based on the APN, FIPS county code, and FIPS state code provided. This approximate address may not exist or may not accept mail delivery.	
LeadingDirectional	3	Leading directional, for example: 123 E Main St. Apt 3	
PrivateMailbox	9	Private mailbox indicator. Not output for multiline input.	
PrivateMailbox.Designator	5	The type of private mailbox. Possible values include:StandardNon-Standard	
RRHC	2	Rural Route/Highway Contract indicator.	
StreetName	41	Street name, for example: 123 E Main St. Apt 3	
StreetSuffix	5	Street suffix, for example: 123 E Main St. Apt 3	
TrailingDirectional	3	Trailing directional, for example: 123 Pennsylvania Ave NW	

Postal Data

Postal data output fields contain detailed postal information for the address, such as the preferred city name and the US carrier route. To include postal data fields in the output, set Option.OutputRecordType = P.

Response Element	Max. Field Length with null terminator	Description	
CityPreferredName	29	The USF	$2S^{\circ}$ preferred city name for the ZIP Code of the address.
CityShortName	29	The USPS [®] -approved abbreviation for the city, if there is one. The USPS [®] provides abbreviations for city names that are 14 characters long or longer. City abbreviations are 13 characters or less and can be used when there is limited space on the mailing label. If there is no short city name for the city, then the full city name is returned.	
CityStateRecordName	29	USPS [®] city state city name.	
DeliveryPointCode	3	Two-digit delivery point barcode.	
GovernmentBuilding	2	Indicates	s if a building is used by the city, state, or federal government.
		Α	City government building
		В	Federal government building
		С	State government building
		D	Firm only
		Е	City government building and firm only
		F	Federal government building and firm only
		G	State government building and firm only
			es A, B, C, E, F, and G are valid for Alternate records only. The s valid for both base and alternate records.
PostalBarCode	7	Six-digit	combination of ZIP+4 Code and the delivery point barcode.
PostalCodeClass	2	ZIP Clas	sification code.
		null	Standard ZIP Code
		М	Military ZIP Code
		Ρ	ZIP Code has P.O. boxes only
		U	Unique ZIP Code (ZIP Code assigned to a single organization)

Response Element	Max. Field Length with null terminator	Descrip	tion
PostalCodeUnique	2		if the ZIP Code is a unique ZIP Code assigned to an individual or agency.
		Y	Unique ZIP name
		null	No unique ZIP name
PostalFacility	2	USPS Cit	ty State Name Facility code.
		Α	Airport Mail Facility (AMF)
		в	Branch
		С	Community Post Office (CPO)
		D	Area Distribution Center (ADC)
		Е	Sectional Center Facility (SCF)
		F	Delivery Distribution Center (DDC)
		G	General Mail Facility (GMF)
		к	Bulk Mail Center (BMC)
		М	Money Order Unit
		N	Non-Postal Community Name, Former Postal Facility, or Place Name
		Р	Post Office
		S	Station
		U	Urbanization
USBCCheckDigit	2	Check-di	git for delivery point barcode.
USCarrierRouteCode	5	Carrier Route code.	

Response Element	Max. Field Length with null terminator	Description				
USCarrierRouteSort	2		Indicates if the USPS uses a carrier route sort, and what type of sort the USPS allows.			
		Α	Automation cart allowed, optional cart merging allowed			
		в	Automation cart allowed, no optional cart merging allowed			
		С	No automation cart allowed, optional cart merging allowed			
		D	No automation cart allowed, no optional cart merging allowed			
USCityDelivery	2	Indicate	es if has city-delivery carrier routes.			
		Y	Has city-delivery carrier routes			
		Ν	Does not have city-delivery carrier routes.			
USLACS	2	Indicates if LACS ^{Link} match occurred.				
		Y	Matched LACS ^{Link} record			
		Ν	LACS ^{Link} match not found			
		F	False-positive LACS ^{Link} record			
		S	Secondary information (unit number) removed to make a LACS ^{Link} match			
		null	Records not processed through LACS ^{Link}			
			re information, see Locatable Address Conversion System on page 21.			
USLACS.ReturnCode	3	Indicate	es LACS ^{Link} results.			
		Α	Matched LACS ^{Link} record			
		00	LACS ^{Link} match was not found			
		09	Matched to highrise default, but noLACS ^{Link} conversion			
		14	Found LACS ^{Link} match, but no LACS ^{Link} conversion			
		92	Secondary information (unit number) was removed to make a LACS ^{Link} match			
		null	Records not processed through LACS ^{Link}			
			re information, see Locatable Address Conversion System on page 21.			

Response Element	Max. Field Length with null terminator	Description
USLOTCode	2	A combination of the 4-digit Line of Travel (LOT) Code and the ascending (A) or descending (D) indicator.

Qualifiers

The qualifiers output fields contain qualification information about the match, such as the location code and the match code. To include qualifier output fields in the output, set Option.OutputRecordType = Q.

Response Element	Max. Field Length with null terminator	Description	
CountryLevel	2	The category of postal data available. Always returns A in ReverseAPNLookup—Validates, corrects, and provides missing posta code, city name, state/county name, street address elements, and country name.	
DatabaseVersion	15	USPS publish date, in the format Month Year.	
EWSMatch	2	Indicates if Rev Warning Syste	rerseAPNLookup denied a match because of Early m (EWS) data.
		Y	EWS denied a match.
		null	EWS did not deny a match.
		For more inforr on page 25.	nation about EWS, see Early Warning System (EWS)
ExpirationDate	11	Date the database expires, in the format MM/DD/YYYY.	
GeoStanMatchScore	13	Record matching score (for multimatches only).	

Response Element	Max. Field Length with null terminator	Description	
Intersection	2	Indicates	s if ReverseAPNLookup found a cross-street match.
		т	True, a cross-street match was found.
		F	False, a cross-street match was not found.
IsAlias	4	3 charac	APNLookup located a matched record by an index alias. Returns sters. The first is an N for normal street match or A for alias ncluding buildings, aliases, firms, etc.). The next 2 characters
		01	Basic index (normal address match)
		02	USPS street name alias index
		03	USPS building index
		04	USPS firm name index
		05	Statewide intersection alias match (when using the Usw.gsi or Use.gsi file)
		06	Spatial data street name alias (when using the Us_pw.gsi, Us_pe.gsi, Us_psw.gsi, or Us_pse.gsi file)
		07	Alternate index (when using Zip9.gsu, Zip9e.gsu, and Zip9w.gsu)
		08	LACS ^{Link}
		09	Auxiliary file match
		10	Centrus Alias index (when using usca.gsi)
		11	POI index (when using poi.gsi)
		12	USPS Preferred Alias
		13	ZIPMove match (when using us.gsz)
		14	Expanded Centroids match (when using us_cent.gsc and/or bldgcent.gsc)
LACSAddress	2		s if ReverseAPNLookup converted an address due to the le Address Conversion System (LACS).
		L	Converted
		null	Not converted
			e information about LACS, see Locatable Address Conversion (LACS) on page 21.

Response Element	Max. Field Length with null terminator	Descriptio	n
LocationCode.Description	128		de converted to text. Only returned when you set the n options to return additional descriptions (verbose).
MatchCode.Description	128		converted to text. Only returned when you set the n options to return additional descriptions (verbose).
RecordType	18	Indicates the GeneralD HighRise FirmReco Normal PostOffice RRHighwa	rd eBox
RecordType.Default	2	Indicates typ RRHighway	be of match that occurred for the record type HighRise or Contract:
		Y	Default match
		Ν	Exact match
		U	Not matched

Response Element	Max. Field Length with null terminator	Description	
StreetDataCode	3	Indicates the da	ata used to obtain a match.
		0	USPS data.
		1	TIGER data.
		2	TomTom data.
		6	HERE data.
		7	TomTom point-level data.
		8	Centrus point-level data.
		9	Auxiliary file data.
		10	User Dictionary.
		11	HERE point-level data.
		12	Master Location data.
		For more inform Databases on	ation about these databases, see Enterprise Geocoding page 5.

Range

The range output fields contain information about the street range, such as the high and low unit numbers. To include range data fields in the output, set Option.OutputRecordType = R.

Response Element	Max. Field Length with null terminator	Description
Alternate	2	 USPS code that specifies whether a record is a base or alternate record. B Base record. Base records can represent a range of addresses or an individual address, such as a firm record. A Alternate record. Alternate records are individual delivery points.
HouseNumberHigh	12	House number high.

Response Element	Max. Field Length with null terminator	Description	
HouseNumberLow	12	House number low.	
HouseNumberParity	2	Indicates if the house	e number range contains even or odd numbers.
		E	Even
		0	Odd
		В	Both
PostalCodeExtensionHigh	5	4-digit ZIP Code exte	ension high.
PostalCodeExtensionLow	5	4-digit Zip Code exte	nsion low.
UnitNumberHigh	12	Unit number high.	
UnitNumberLow	12	Unit number low.	
UnitNumberParity	2	Indicates if the unit number range contains even or odd numbers.	
-		E	Even
		0	Odd
		В	Both

Segment

The segment output fields contain information about the street segment identified by the data provider. To include segment data fields in the output, set Option.OutputRecordType = S.

Response Element	Max. Field Length with null terminator	Description	
BlockLeft	16	Provides the Census FIPS Code that indicates the address is on the left side of the street.	
BlockRight	16	Provides the Census FIPS Code that indicates the address is on the right side of the street.	
BlockSuffixLeft	2	Current left Block suffix for Census 2010 Geography. Returns A or B. Only available in Centrus Enhanced data.	
BlockSuffixRight	2	Current right Block suffix for Census 2010 Geography. Returns A or B. Only available in Centrus Enhanced data.	
RoadClass	3	The type of road:	
		1 The road is a major road.	
		2 The road is a minor road.	
PointCode	11	Unique point ID assigned by the data provider. This field is blank if the matched record is not from point-level data.	
SegmentCode	11	Unique 10-digit segment ID assigned by the street network provider.	
SegmentDirection	2	Indicates the order of numbers on a segment.	
		F Forward	
		R Reversed	
		B Both	
		U Undetermined	
SegmentHouseNumberHigh	12	A high range number in the segment.	
SegmentHouseNumberLow	12	A low range number in the segment.	

Response Element	Max. Field Length with null terminator	Description	
SegmentLength		The length, in	feet, of a block segment. This field is deprecated.
SegmentParity	2	Indicates whic L R B U	h side of the street has odd numbers. Left side of the street Right side of the street Both sides of the street Undetermined

4 -ReverseGeocodeUSLocation

ReverseGeocodeUSLocation takes a latitude and longitude point as input and returns the address that is the best match for that point.

ReverseGeocodeUSLocation is part of the Enterprise Geocoding Module.

In this section

ReverseGeocodeUSLocation	125
Request	128
Response	134

ReverseGeocodeUSLocation

ReverseGeocodeUSLocation takes a latitude and longitude point as input and returns the address that is the best match for that point. For example, you could enter the following information:

Longitude: -105239771 Latitude: 40018912 Search Distance: 150 feet

This input would result in the following output:

```
4750 WALNUT ST BOULDER, CO 80301-2538
MatchCode = NS0
LocCode = AS0
Lon = -105239773
Lat = 40018911
Distances:
Search = 150
Offset = 50
Squeeze = 50
Nearest = 50.0
Pct Geocode = 94.0
SeqID = 472881795
PtID = GDT
Block = 080130122032066
County Name = BOULDER COUNTY
DPBC = 50
```

Note: The address returned is an approximate address based on the latitude and longitude provided. This approximate address may not exist or may not accept mail delivery.

ReverseGeocodeUSLocation processes geocodes in the following order:

- 1. ReverseGeocodeUSLocation defines a small rectangle based on your input geocode and search distance.
- 2. ReverseGeocodeUSLocation computes the distance between each street segment and the input location.
- 3. If one segment is closest, ReverseGeocodeUSLocation finds the offset and interpolated percentage (using the squeeze factor) and the street side. It then computes an approximate house number based on this information.

If there is more than one segment that is equally close to the input location, a multi-match occurs. ReverseGeocodeUSLocation returns the information for all of the equally close segments so that you can determine which segment is applicable.

4. ReverseGeocodeUSLocation returns the address information, including the segment range, the approximate house number, and the parity of the range along with other standard address information.

Note: Although many of the standard address matching outputs apply to the reverse geocoding option, several outputs are unavailable (such as LACS^{Link} information and unit numbers). ReverseGeocodeUSLocation returns these outputs as blank. ReverseGeocodeUSLocation also has outputs specific to reverse geocode processing, such as specific match codes and the distance from the input location to the matched segment.

To use ReverseGeocodeUSLocation, you need additional data files, called GSX files. There is an option to install these files when you install the geocoding database. The GSX files must be installed the GSX subdirectory of the geocoding database. If you install the Centrus Enhanced Points, Centrus Premium Points, or TomTom Points database, you must recreate the GSX files. Consult with Pitney Bowes Software Technical Support if you need more information about GSX files.

Resource URL

JSON endpoint:

```
http://server:port/rest/ReverseGeocodeUSLocation/results.json
```

XML endpoint:

```
http://server:port/rest/ReverseGeocodeUSLocation/results.xml
```

Example with JSON Response

The following example requests a JSON response:

```
http://myserver:8080/rest/ReverseGeocodeUSLocation/results.json?
Data.Longitude=-73549161&Data.Latitude=41071067
```

The JSON returned by this request would be:

```
{"output_port": [{
    "Latitude": "41.071067",
    "Longitude": "-73.549161",
    "StreetSide": "R",
    "Distance": "50.4",
    "PercentGeocode": "50.0",
    "FirmName": "",
    "AddressLine1": "2995 Summer St",
    "AddressLine2": "",
    "LastLine": "Stamford, CT 06905",
    "AdditionalInputData": "",
    "City": "Stamford",
    "StateProvince": "CT",
    "PostalCode.Base": "06905",
    "PostalCode.AddOn": "",
```

```
"PostalCode": "06905",
"USUrbanName": "",
"Country": "United States of America",
"LocationCode": "ASO",
"MatchCode": "NS1",
"StreetDataType": "TOMTOM",
"Confidence": "100.0",
"ProcessedBy": "KGL",
"PBKey": "",
"Status": "",
"Status.Code": "",
"Status.Description": "",
"user_fields": []
}]
```

Example with XML Response

The following example requests an XML response:

```
http://myserver:8080/rest/ReverseGeocodeUSLocation/results.xml?
Data.Latitude=41071067&Data.Longitude=-73549161
```

The XML returned by this request would be:

```
<xml.ReverseGeocodeUSLocationResponse</pre>
xmlns="http://www.pb.com/spectrum/services/ReverseGeocodeUSLocation">
   <output port>
      <Address>
         <Latitude>41.071067</Latitude>
         <Longitude>-73.549161</Longitude>
         <StreetSide>R</StreetSide>
         <Distance>50.4</Distance>
         <PercentGeocode>50.0</PercentGeocode>
         <FirmName/>
         <AddressLine1>2995 Summer St</AddressLine1>
         <AddressLine2/>
         <LastLine>Stamford, CT
                                  06905</LastLine>
         <AdditionalInputData/>
         <City>Stamford</City>
         <StateProvince>CT</StateProvince>
         <PostalCode.Base>06905</PostalCode.Base>
         <PostalCode.AddOn/>
         <PostalCode>06905</PostalCode>
         <USUrbanName/>
         <Country>United States of America</Country>
         <LocationCode>AS0</LocationCode>
         <MatchCode>NS1</MatchCode>
         <StreetDataType>TOMTOM</StreetDataType>
         <Confidence>100.0</Confidence>
         <ProcessedBy>KGL</ProcessedBy>
         <PBKey/>
         <Status/>
```

```
<Status.Code/>
<Status.Description/>
<user_fields/>
</Address>
</output_port>
</xml.ReverseGeocodeUSLocationResponse>
```

Request

Input

ReverseGeocodeUSLocation Input Data

ReverseGeocodeUSLocation takes longitude and latitude information as input. The following table provides information about the format and layout of the input.

Parameter	Format	Description
Data.Latitude	String	Latitude of the point for which you want address information returned. Specify latitude in millionths of decimal degrees.
Data.Longitude	String	Longitude of the point for which you want address information returned. Specify longitude in millionths of decimal degrees.

Input Parameters

Configuration Options

ReverseGeocodeUSLocation Configuration Options

The following table lists the configuration options for ReverseGeocodeUSLocation.

ReverseGeocodeUSLocation

Parameter	Description		
Option.Dataset	The name of the database that contains the data to use in the search process.		
Option.SearchDistance	Specifies the radius, in feet, that ReverseGeocodeUSLocation searches for matches. The allowable range is 0 - 5280 feet. Default = 150 feet.		
Option.FindClosestPoint	Enables matching to the nearest point address within the search radius, rather than to the closest feature - such as a street segment or intersection as well as point addresses.		
	Note: This option requires that at least one streets data set and one points data set are loaded; otherwise, the match will be made to the closest feature.		
	Y Match to the nearest point address within the search radius.		
	N Match to the closest point address or feature. Default.		
Option.FindNearestAddress	Specifies whether ReverseGeocodeUSLocation should find the nearest interpolated address to the input geocode.		
	Y Find the nearest address. Default.		
	N Do not find the nearest address.		
	Note: You can use this option with the Option.FindNearestIntersection option to geocode to both addresses and intersections.		
Option.FindNearestUnranged	Specifies whether ReverseGeocodeUSLocation can match to a street segment that does not have a number range. This option is active when Option.FindNearestAddress=Y.		
	Y Allow ReverGeocodeUSLocation to match to an unranged street segment. Default.		
	N Do not allow ReverseGeocodeUSLocation to match to an unranged street segment.		
	Note: If you are using the point-level data option, ReverseGeocodeUSLocation ignores the Nearest Unranged option.		

Parameter	Descrip	tion
Option.FindNearestIntersection		whether ReverseGeocodeUSLocation should find the nearest street on to the input geocode.
	Y	Find the nearest street intersection. Default.
	Ν	Do not find the nearest street intersection.
	C	lote: You can use this option with the <pre>Dption.FindNearestAddress option to geocode to both</pre> ddresses and intersections.
Option.Offset	-	the offset distance from the street segments. The allowable range 0 feet. Default = 50 feet.
	from bein geocodin where the is not on point on t of the bui means th the street segment street from	

Street coordinates are accurate to 1/10,000th of a degree and interpolated points are accurate to 1/1,000,000th of a degree.

Parameter	Description	
Option.Squeeze	geocoding. The r diagram compare	ance, in feet, to squeeze the street end points in street-level ange is 0 -2147483647 feet. Default = 50 feet. The following es the end points of a street to squeezed end points.
Option.LatLonFormat	Specifies the forr	nat to use for returned latitude/longitude.
	Decimal	The format is 90.000000-180.000000. Default.
	Integer	The format is 9000000-180000000.
Option.InputLatLonFormat	Specifies the forr	nat to use for input latitude/longitude.
	Decimal	The format is 90.000000-180.000000.
	Integer	The format is 9000000-180000000. Default.
Option.RetrieveElevation	address. Elevatio	r ReverseGeocodeUSLocation returns the elevation of the n is the distance above or below sea level of a given location. returned in the Elevation output field, which is part of the le output group.
	Centrus I	his option requires that you have licensed and installed the Premium Points database. Elevation data is not available dresses. See the coverage map included with the points a.
	Y R	eturn elevation data.
	N De	o not return elevation data. Default.

Parameter	Descript	Description	
Option.RetrieveAPN	APN (asse property b	whether ReverseGeocodeUSLocation should determine the address's essor's parcel number). The APN is an ID number assigned to a y the local property tax authority. The APN is returned in the APN d, which is part of the Census output group.	
	Ce da	Note: This option requires that you have licensed and installed t Cenrus Enhanced Points or Centrus Premium Points database. Al data is not available for all addresses. See the coverage map includ with the points database.	
	Y	Return APN data.	
	Ν	Do not return APN data. Default.	

Option.FIND_APPROXIMATE_PBKEY When Option.FIND_APPROXIMATE_PBKEY is enabled, if an address match is not made to Master Location Data (MLD), but to a different dataset, the pbKey[™] unique identifier of the nearest MLD point located within the search distance is returned. To distinguish when a fallback pbKey[™] unique identifier is returned, the PBKey return value contains a leading character of "X" rather than "P", for example: X00001XSF1IF. Note, all of the other fields returned for the address match, including the geocode and all associated data, reflect the match results for the input address. The fallback pbKey[™] unique identifier can then be used for the lookup to the GeoEnrichment dataset(s), and the attribute data for the fallback location is returned for the match. For more information, see PBKey Fallback on page 17.

The search distance for the nearest MLD point is configurable using the ReverseGeocodeUSLocation Option.SearchDistance field. The allowable range is 0 - 5280 feet. Default = 150 feet.

- Y When a matched address does not have an associated pbKey[™] unique identifier, attempt to return the nearest address record's pbKey[™] unique identifier.
- N When a matched address does not have an associated pbKey[™] unique identifier, do not return the nearest address record's pbKey[™] unique identifier. Default.

Output Format

ReverseGeocodeUSLocation Output Format Options

The following table lists the options that control the format of the output.

Parameter	Description	
Option.OutputCasing	Specifie	es the casing of the output data.
	М	Returns the output in mixed case. Default. For example:
		123 Main St Mytown FL 12345
	U	Returns the output in upper case. For example:
		123 MAIN ST MYTOWN FL 12345
Option.OutputVerbose	field as code. F	es whether ReverseGeocodeUSLocation provides an additional description output. This field provides the text equivalent to a field represented by a for example, LocationCode returns a code that indicates the accuracy) of the assigned geocode. LocationCode.Description provides
	the description for the code returned.	
	Y	Include verbose fields.
	Ν	Do not include verbose fields. Default.

Output Data

ReverseGeocodeUSLocation Output Data Options

The following table lists the options that control which data is returned by ReverseGeocodeUSLocation.

Parameter	Description		
Option.OutputRecordType	Specifies the optional data to include in the output. Note that ReverseGeocodeUSLocation always returns the data listed in Default Output on page 137. The data you select here is returned with the default output data.		
	 C—Census E—Parsed Elements L—Latitude/Longitude R—Range S—Segment Q—Qualifiers 		
	For a list of the fields included in each data type, see Response on page 134. If you do not want all of the fields in a record type returned, do not use Option.OutputRecordType; instead, use Option.OutputFields to specify the desired individual output fields.		
Option.OutputFields	Specifies the individual output fields you want returned. List fields with a pipe () between each field. You can use this field instead of the Output Record Type to limit the output to those fields that are important to your data needs.		
	Default list: AddressLine1 LastLine Longitude Latitude MatchCode LocationCode		

Response

ReverseGeocodeUSLocation always returns a default set of output fields that contain the address, geocode, and result indicators. For information about these fields, see **Default Output** on page 137. You can also choose to include optional categories of output data.

Census

Census output fields contain U.S. Census information about the address. To include census data in the output, set Option.OutputRecordType = C.

Note: The following Census output fields - CBSADivisionName, CBSAName, CSAName and USCountyName - are only returned when you set the option Option.OutputVerbose=Y.

Response Element	Max. Field Length with null terminator	Descriptic	on
APN	46		or's parcel number of the property. The assessor's parcel n ID number assigned to a property by the local property /.
BlockSuffix	2	0	acter block suffix for split Census blocks. Returns A or B. ble in Centrus Enhanced data.
CBSACode	6	Indicates Co	ore Based Statistical Area (CBSA).
CBSADivisionCode	6	Denotes a s	ubdivision of a CBSA.
CBSADivisionName	128	The name of the address	f the Core Based Statistical Area (CBSA) division in which is located.
		at least 2.5 of counties r see <i>Metrop</i> e	ision is a metropolitan statistical area with a population of million that has been subdivided to form smaller groupings referred to as "metropolitan divisions." For more information, <i>plitan and Micropolitan Statistical Areas</i> section of the U.S. eau website:
		www.censu	is.gov/population/www/metroareas/metroarea.html
			e: The CBSA division name is only returned if you set the on Option.OutputVerbose=Y .
CBSAMetro	2	Metropolitar	n Statistical Area. Valid values include:
		Y	Metro statistical area.
		Ν	Micro statistical area.
		null	Data unavailable.

Response Element	Max. Field Length with null terminator	Description
CBSAName	128	The name of the core based statistical area (CBSA) in which the address is located.
		A CBSA is a collective term that refers to both metropolitan and micropolitan areas. A metropolitan area has a population of more than 50,000, and a micropolitan area has a population between 10,000 and 49,999. For more information, see <i>Metropolitan and Micropolitan Statistical Areas</i> section of the U.S. Census Bureau website:
		www.census.gov/population/www/metroareas/metroarea.html
		Note: The CBSA name is only returned if you set the option Option.OutputVerbose=Y.
CensusBlockID	16	The ID of the Census Federal Information Processing Standard (FIPS) code.
CensusTract	7	6-digits extracted from the CensusBlockID.
CSACode	4	Denotes the code for a geographic entity that consists of 2 or more adjacent CBSAs with employment interchange measures of at least 15.
CSAName	128	The name of the combined statistical area (CSA) in which the address is located.
		A CSA is a combination of two or more adjacent Core Based Statistical Areas (CBSAs) with a high employment interchange measure. The employment interchange measure is the sum of the percentage of employed residents of the smaller entity who work in the larger entity and the percentage of the employment in the smaller entity that is accounted for by workers who reside in the larger entity. Pairs of CBSAs with employment interchange measures of at least 25% combine automatically. Pairs of CBSAs with employment interchange measures of at least 15%, but less than 25%, may combine if local opinion in both areas favors combination. Note: The CSA name is only returned if you set the option <code>Option.OutputVerbose=Y</code> .

Response Element	Max. Field Length with null terminator	Description
USCountyName	128	The name of the county or parish in which the address is located. Note: The county/parish name is only returned if you set the option Option.OutputVerbose=Y.
USFIPSCountyNumber	4	3-digit FIPS county code extracted from the CensusBlockID.
USFIPSStateCode	3	2-digit FIPS state code extracted from the CensusBlockID.
USFIPSStateCountyCode	6	5-digit FIPS code for state and county extracted from the CensusBlockID.

Default Output

ReverseGeocodeUSAddress always includes the following fields in the output.

Response Element	Max. Field Length with null terminator	Description
AdditionalInputData	61	This field may contain input data that was not used for matching; for example, input address information that appears after a mail stop or attention designator.
AddressLine1	104	First line of the address.
AddressLine2	104	Second line of the address.
City	29	Municipality name.

Response Element	Max. Field Length with null terminator	Description
Confidence	4	Indicates the confidence in the output provided. The range is from 0 (zero) to 100, with 0 being no match and 100 being an exact match.
Country	25	The name of the country. Since ReverseAPNLookup only works for U.S. locations, this field will always contain United States of America .
Distance	8	The distance, in feet, from the input geocode to nearest matched address or intersection.
Elevation	11	The location's elevation in feet above or below sea level.
FirmName	41	Name of the company.
LastLine	61	Complete last address line (municipality, state, and postal code).
Latitude	11	7-digit number in degrees and calculated to 4 decimal places (in the format specified).
LocationCode	5	Indicate the accuracy (quality) of the assigned geocode. For more information, see Address Location Codes on page 196.
Longitude	12	7-digit number in degrees and calculated to 4 decimal places (in the format specified).
MatchCode	5	Indicates the portions of the address that matched to the directory file. For more information, see Match Codes on page 188.
РВКеу	13	A unique address identifier that is returned when an address match is made using the Master Location Dataset. The pbKey [™] unique identifier is used as a lookup key to a GeoEnrichment dataset, in order to return attribute data for the match.

Response Element	Max. Field Length with null terminator	Description
PercentGeocode	6	The percent along the street segment that matches the geocode. For example, if the returned geocode falls 1/3 along the way of the entire street segment, the percent is 33.000.
		Note: This value is always 0.0 for matches to point-level data and intersections.
PostalCode	10	9-digit ZIP Code with or without a hyphen.
PostalCode.AddOn	5	4-digit ZIP Code extension.
PostalCode.Base	6	5-digit ZIP Code.
ProcessedBy	4	The underlying software that processed the request. KGR for ReverseGeocodeUSLocation.
RRHC	2	Rural Route Highway Contract (RRHC). This field is null if the address not a RRHC.
StateProvince	3	2-character state abbreviation.
Status	2	Reports the success or failure of the match attempt.
		null Success
		F Failure
Status.Code	23	Reason for failure:
		Internal System Error
		No Geocode FoundInsufficient Input Data

Response Element	Max. Field Length with null terminator	Description	
Status.Description	32	Description of the probler	n:
		Problem + explanation	Returned when Status.Code contains "Internal System Error"
		Geocoding Failed	Returned when Status.Code contains "No Geocode Found"
		No location returned	Returned when Status.Code contains "No Geocode Found"
StreetDataType	20	The data set that Reverse against.	eGeocodeUSLocation attempted to match
		USPS	USPS
		TIGER	TIGER
		томтом	TomTom Streets data set
		SANBORN POINT DAT	A Sanborn Points data set
		HERE	HERE Streets data set
		TOMTOM POINT DATA	TomTom Points data set
		AUXILIARY	Auxiliary file
		CENTRUS POINT DATA	Centrus Points data set
		USER DICTIONARY	User Dictionary
		HERE POINT DATA	HERE Points data set
		MASTER LOCATION	Master Location Data
StreetSide	2	Indicates the side of the street the range occupies.	
		L The range of	ccupies the left side of the street.
		R The range of	ccupies the right side of the street.
		B The range of	ccupies both sides of the street.
		U Undetermine	ed.
USUrbanName	31	Urbanization name. Puer	to Rico addresses only.

Latitude/Longitude

The latitude/longitude output fields contain the geographic coordinates of the location. To include latitude/longitude output fields in the output, set Option.OutputRecordType = L.

Response Element	Max. Field Length with null terminator	Description
Elevation	11	The location's elevation in feet above or below sea level.
Latitude	11	7-digit number in degrees and calculated to 4 decimal places (in the format specified).
Longitude	12	7-digit number in degrees and calculated to 4 decimal places (in the format specified).

Parsed Elements

The Parsed Elements output record type contains standard address information as individual units, such as street suffixes (AVE) and leading directionals (N and SE). To include parsed elements in the output, set Option.OutputRecordType = E.

Response Element	Max. Field Length with null terminator	Description
ApartmentLabel	5	Unit, such as apartment, suite, or lot.
ApartmentLabel2	5	Unit, such as apartment, suite, or lot.
ApartmentNumber	12	Unit number.

Response Element	Max. Field Length with null terminator	Description
ApartmentNumber2	12	Unit number.
CrossStreetLeadingDirectional	3	Prefix for cross street.
CrossStreetName	41	Name of cross street.
CrossStreetSuffix	5	Cross street suffix.
CrossStreetTrailingDirectional	3	Postfix for cross street.
HouseNumber	12	Building number for the matched location. Note: This is an approximate building number based on the latitude and longitude provided. This approximate address may not exist or may not accept mail delivery.
LeadingDirectional	3	Street directional that precedes the street name. For example, the N in 138 N Main Street.
PrivateMailbox	9	Private mailbox. Not output for multiline input.
PrivateMailbox.Designator	5	Private mailbox description. Not output for multiline input.
StreetName	41	Street name.
StreetSuffix	5	The street type of the matched location. For example, AVE for Avenue.
TrailingDirectional	3	Street directional that follows the street name. For example, the N in 456 Washington N.

Postal Data

Postal data output fields contain detailed postal information for the address, such as the preferred city name and the US carrier route. To include postal data fields in the output, set Option.OutputRecordType = P.

Response Element	Max. Field Length with null terminator	Description		
CityPreferredName	29	The $USPS^{\$}$ preferred city name for the ZIP Code of the address.		
CityShortName	29	The USPS [®] -approved abbreviation for the city, if there is one. The USPS [®] provides abbreviations for city names that are 14 characters long or longer. City abbreviations are 13 characters or less and can be used when there is limited space on the mailing label. If there is no short city name for the city, then the full city name is returned.		
CityStateRecordName	29	USPS [®] city state city name.		
DeliveryPointCode	3	Two-digit delivery point barcode.		
GovernmentBuilding	2	Indicates if a building is used by the city, state, or federal government.		
		Α	City government building	
		в	Federal government building	
		С	State government building	
		D	Firm only	
		Е	City government building and firm only	
		F	Federal government building and firm only	
		G	State government building and firm only	
		The values A, B, C, E, F, and G are valid for Alternate records only. The value D is valid for both base and alternate records.		
PostalBarCode	7	Six-digit combination of ZIP+4 Code and the delivery point barcode.		

Response Element	Max. Field Length with null terminator	Description		
PostalCodeClass	2	ZIP Classification code.		
		null	Standard ZIP Code	
		М	Military ZIP Code	
		Р	ZIP Code has P.O. boxes only	
		U	Unique ZIP Code (ZIP Code assigned to a single organization)	
PostalCodeUnique	2	Indicates if the ZIP Code is a unique ZIP Code assigned to an individua company or agency.		
		Y	Unique ZIP name	
		null	No unique ZIP name	
PostalFacility	2	USPS City State Name Facility code.		
		Α	Airport Mail Facility (AMF)	
		В	Branch	
		С	Community Post Office (CPO)	
		D	Area Distribution Center (ADC)	
		Е	Sectional Center Facility (SCF)	
		F	Delivery Distribution Center (DDC)	
		G	General Mail Facility (GMF)	
		к	Bulk Mail Center (BMC)	
		М	Money Order Unit	
		N	Non-Postal Community Name, Former Postal Facility, or Place Name	
		Р	Post Office	
		S	Station	
		U	Urbanization	
USBCCheckDigit	2	Check-digit for delivery point barcode.		

Spectrum Technology Platform 2019.1.0 Geocoding Guide for United States - REST

Response Element	Max. Field Length with null terminator	Descri	ption
USCarrierRouteCode	5	Carrier	Route code.
USCarrierRouteSort	2		es if the USPS uses a carrier route sort, and what type of sort PS allows.
		Α	Automation cart allowed, optional cart merging allowed
		в	Automation cart allowed, no optional cart merging allowed
		С	No automation cart allowed, optional cart merging allowed
		D	No automation cart allowed, no optional cart merging allowed
USCityDelivery	2	Indicate	s if has city-delivery carrier routes.
		Y	Has city-delivery carrier routes
		Ν	Does not have city-delivery carrier routes.
USLACS	2	Indicate	es if LACS ^{Link} match occurred.
		Y	Matched LACS ^{Link} record
		N	LACS ^{Link} match not found
		F	False-positive LACS ^{Link} record
		S	Secondary information (unit number) removed to make a LACS ^{Link} match
		null	Records not processed through LACS ^{Link}
			re information, see Locatable Address Conversion System on page 21.

Response Element	Max. Field Length with null terminator	Descriptio	n
USLACS.ReturnCode	3	Indicates LA	CS ^{Link} results.
		Α	Matched LACS ^{Link} record
		00	LACS ^{Link} match was not found
		09	Matched to highrise default, but noLACS ^{Link} conversion
		14	Found LACS ^{Link} match, but no LACS ^{Link} conversion
		92	Secondary information (unit number) was removed to make a LACS ^{Link} match
		null	Records not processed through LACS ^{Link}
		For more info (LACS) on p	ormation, see Locatable Address Conversion System page 21.
USLOTCode	2		on of the 4-digit Line of Travel (LOT) Code and the ascending nding (D) indicator.

Qualifiers

The qualifiers output record type contains qualification information about the match, such as the location code and the match code. To include latitude/longitude output fields in the output, set Option.OutputRecordType = Q.

Response Element	Max. Field Length with null terminator	Description
CountryLevel	2	The category of postal data available. Always returns A in ReverseGeocodeUSLocation—Validates, corrects, and provides missing postal code, city name, state/county name, street address elements, and country name.
DatabaseVersion	15	USPS publish date, in the format Month Year.

Response Element	Max. Field Length with null terminator	Descript	ion
EWSMatch	2	Indicates if ReverseGeocodeUSLocation denied a match because of Early Warning System (EWS) data.	
		Y	EWS denied a match.
		null	EWS did not deny a match.
		For more on page 2	information about EWS, see Early Warning System (EWS) 5.
ExpirationDate	11	Date the database expires, in the format MM/DD/YYYY.	
GeoStanMatchScore	13	Record matching score (for multimatches only).	
Intersection	2		if ReverseGeocodeUSLocation found a cross-street match.
		т	True, a cross-street match was found.
		F	False, a cross-street match was not found.

Response Element	Max. Field Length with null terminator	Descrip	tion
IsAlias	4	alias. Ref	GeocodeUSLocation located a matched record by an index turns 3 characters. The first is an N for normal street match or s match (including buildings, aliases and firms). The next 2 rs are:
		01	Basic index (normal address match)
		02	USPS street name alias index
		03	USPS building index
		04	USPS firm name index
		05	Statewide intersection alias match (when using the Usw.gsi or Use.gsi file)
		06	Spatial data street name alias (when using, the Us_pw.gsi, Us_pe.gsi, Us_psw.gsi, or Us_pse.gsi file is required)
		07	Alternate index (when using the Zip9.gsu, Zip9e.gsu, and Zip9w.gsu files)
		08	LACS ^{Link}
		09	Auxiliary file match
		10	Centrus Alias index (when using the usca.gsi file)
		11	POI index (when using poi.gsi)
		12	USPS Preferred Alias
		13	ZIPMove match (when using us.gsz)
		14	Expanded Centroids match (when using us_cent.gsc and/or bldgcent.gsc)
LACSAddress	2		if ReverseGeocodeUSLocation converted an address due to table Address Conversion System (LACS).
		L	Converted
		null	Not converted.
			information about LACS, see Locatable Address Conversion (LACS) on page 21.
LocationCode.Description	128		Code converted to text. Only returned when you set the ation options to return additional descriptions (verbose).

Response Element	Max. Field Length with null terminator	Descrip	tion
MatchCode.Description	128		de converted to text. Only returned when you set the tion options to return additional descriptions (verbose).
RecordType	18	Indicates	the record type:
		 GeneralDelivery HighRise FirmRecord Normal PostOfficeBox RRHighwayContract 	
RecordType.Default	2		type of match that occurred for the record type HighRise or ayContract:
		Y	Default match.
		N	Exact match.
		U	Not matched.
StreetDataCode	3	Indicates	the data used to obtain a match.
		0	USPS data.
		1	TIGER data.
		2	TomTom data.
		6	HERE data.
		7	TomTom point-level data.
		8	Centrus point-level data.
		9	Auxiliary file data.
		10	User Dictionary.
		11	HERE point-level data.
		12	Master Location data.
			information about these databases, see Enterprise Geocoding es on page 5.
StreetDataType	20	Indicates	the data first used to attempt a match.

Range

The range output record type contains information about the street range, such as the high and low unit numbers. To include range data fields in the output, set Option.OutputRecordType = R.

Response Element	Max. Field Length with null terminator	Description	
Alternate	2	 USPS code that specifies whether a record is a base or alternate record. B Base record. Base records can represent a range of addresses or an individual address, such as a firm record. A Alternate record. Alternate records are individual delivery points. 	
HouseNumberHigh	12	House number high.	
HouseNumberLow	12	House number low.	
HouseNumberParity	2	Indicates if the house number range contains even or odd numbers.EEvenOOddBBoth	
PostalCodeExtensionHigh	5	4-digit ZIP Code extension high.	
PostalCodeExtensionLow	5	4-digit Zip Code extension low.	
UnitNumberHigh	12	Unit number high.	
UnitNumberLow	12	Unit number low.	

Response Element	Max. Field Length with null terminator	Description	
UnitNumberParity	2	Indicates if the unit num	ber range contains even or odd numbers.
		E	Even
		0	Odd
		В	Both

Segment

The segment output record type contains information about the street segment identified by the data provider. To include segment data fields in the output, set Option.OutputRecordType = S.

Response Element	Max. Field Length with null terminator	Description	
BlockLeft	16	Provides the Census FIPS Code that indicates the address is on the left side of the street.	
BlockRight	16	Provides the Census FIPS Code that indicates the address is on the right side of the street.	
BlockSuffixLeft	2	Current left Block suffix for Census 2010 Geography. Returns A or Only available in Centrus Enhanced data.	
BlockSuffixRight	2	Current right Block suffix for Census 2010 Geography. Returns A or Only available in Centrus Enhanced data.	
RoadClass	3	The type of road:	
		1	Major
		2	Minor

Response Element	Max. Field Length with null terminator	Descripti	on
SegmentCode	11	Unique 10-	digit segment ID assigned by the street network provider.
SegmentDirection	2	Indicates th	ne order of numbers on a segment.
		F	Forward
		R	Reversed
		В	Both
		U	Undetermined
SegmentHouseNumberHigh	12	A high rang	ge number in the segment.
SegmentHouseNumberLow	12	A low range number in the segment.	
SegmentLength		The length, in feet, of a block segment. This field is deprecated.	
SegmentParity	2	Indicates w	hich side of the street has odd numbers.
		L	Left side of the street
		R	Right side of the street
		в	Both sides of the street
		U	Undetermined
SegmentPoints	1024		atitude/longitude values that represent the segment sto the matched segment.
		The segme follows:	ent points data that is returned for each type of match is as
		Street ma	atches - a list of points
		 Point ma point sind range. Intersection listed first 	tches - one point is returned that is the same as the matched ce a point match consists of a single segment with a single on matches - the segment points are returned for the segment t in the intersection output. For example, Forest Ave at 6th
		returns th	ne segment points for Forest Ave.

5 -ReversePBKeyLookup

ReversePBKeyLookup allows you to look up an address using a pbKeyTM unique identifier as input and returns all standard returns that are provided as part of address matching.

ReversePBKeyLookup is part of the Enterprise Geocoding Module. For more information about the Enterprise Geocoding Module, see Enterprise Geocoding Module on page 4.

In this section

ReversePBKeyLookup	154
ReversePBKeyLookup Resource	156
Request	158
Response	160

ReversePBKeyLookup

ReversePBKeyLookup allows you to look up an address using a pbKeyTM unique identifier as input and returns all standard returns that are provided as part of address matching. For information about the use cases for ReversePBKeyLookup, see **Use Cases** on page 15.

Licensing

ReversePBKeyLookup requires a special license. There are two levels of licensing for ReversePBKeyLookup:

- Standard This license allows ReversePBKeyLookup of all of the standard MLD addresses.
- Enhanced This license allows ReversePBKeyLookup of a portion of MLD addresses that require an additional royalty due to address sourcing constraints.

Requirements

ReversePBKeyLookup includes these requirements:

- You have licensed, installed and added as a database resource the Master Location Dataset (DVDMLD and DVDMLD2).
- You have licensed, installed and added as a database resource the DVDMLDR dataset.
- The MLD and DVDMLDR datasets must be the same vintage.

ReversePBKeyLookup Search Results

When using ReversePBKeyLookup, the search results can return zero to many MLD point address variations that match the input PBKey. There will be no matches returned if the given PBKey is not found. While many PBKeys map to a single point-level address, some PBKeys map to multiple point address variations. Getting multiple point address variations from one PBKey can occur in two circumstances:

- 1. Alias matches. Some streets are known by their common name and one to many aliases. In this case, MLD may contain all variations of street names. An example of multiple alias match returns for an input PBKey (P00008BCG8WM) is shown below:
 - AP02. Normal match (non-alias). 1206 W 600 S, FOUNTAINTOWN, IN 46130-9409

Note: For the alias match results below, the alias addresses are represented; however, the address returned is the normal match address: 1206 W 600 S. The value returned in the isAlias field will indicate an alias match result.

• AP02. Alias match. 1206 W 1200 N, FOUNTAINTOWN, IN 46130-9409

- AP02. Alias match. 1206 W COUNTY ROAD 1200 N, FOUNTAINTOWN, IN 46130-9409
- AP02. Alias match. 1206 W COUNTY ROAD 600 S, FOUNTAINTOWN, IN 46130-9409
- 2. Multi-unit buildings with/without units. In some cases, there are multi-unit addresses without individual unit address records. In this case, you may see multiple address records returned for the same input PBKey, some without unit designations and others with ranged unit designations. In the case of multi-unit addresses that have individual suite/unit number address designations, each will have their own distinct PBKey. The following example shows address results for a PBKey that maps to a building with and without units, which share the same PBKey/location (P00003PZZOIE):
 - AP02. Normal match (non-alias). 4750 WALNUT ST, BOULDER, CO 80301-2532
 - AP02. Normal match (non-alias). 4750 WALNUT ST STE 100-103, BOULDER, CO 80301-2532
 - AP02. Normal match (non-alias). 4750 WALNUT ST STE 205-205, BOULDER, CO 80301-2532
 - AP02. Normal match (non-alias). 4750 WALNUT ST, BOULDER, CO 80301-2538

ReversePBKeyLookup Return Codes and Match Codes

The table below lists the Return Codes and Match Codes returned when using ReversePBKeyLookup.

License	Input PBKey	Point Results	Match Code
Enhanced	Found	One Enhanced	V000
Enhanced	Found	Multiple Standard and/or Enhanced	V001
Enhanced	Not Found	None	E040
Standard	Found	One Standard	V000
Standard	Found	Multiple Standard	V001
Standard	Found	One Standard, some Enhanced	V002
Standard	Found	Multiple Standard, some Enhanced	V003
Standard	Found	All Enhanced	E041
Standard	Not Found	None	E040

License	Input PBKey	Point Results	Match Code
No license	Not applicable	Not applicable	E000

ReversePBKeyLookup Resource

Resource URL

JSON endpoint:

```
http://server:port/rest/ReversePBKeyLookup/results.json
```

XML endpoint:

```
http://server:port/rest/ReversePBKeyLookup/results.xml
```

Example with JSON Response

The following example requests a JSON response:

```
http://myserver:8080/rest/ReversePBKeyLookup/results.json?
Data.PBKey=P00003PZ8QKG&Option.Dataset=EGM_1
```

The JSON returned by this request would be:

```
{"output port": [{
 Latitude=40.051418;
 Longitude=-105.265424;
 StreetSide=L;
 Distance=;
 PercentGeocode=0.0;
 FirmName=;
 AddressLine1=2440 Tamarack Ave;
 AddressLine2=;
 LastLine=Boulder, CO 80304-0987;
 AdditionalInputData=;
 City=Boulder;
 StateProvince=CO;
 PostalCode.Base=80304;
 PostalCode.AddOn=0987;
 PostalCode=80304-0987;
 USUrbanName=;
 Country=United States of America;
 LocationCode=AP02;
 MatchCode=V000;
```

```
StreetDataType=MASTER LOCATION;
PBKey=P00003PZ8QKG;
Confidence=96;
ProcessedBy=KGL;
Status=;
Status.Code=;
Status.Description=;
user_fields=System.Object[]},
]}
```

Example with XML Response

The following example requests an XML response:

```
http://myserver:8080/rest/ReversePBKeyLookup/results.xml?
Data.PBKey=P00003PZ8QKG&Option.Dataset=EGM_1
```

The XML returned by this request would be:

```
<xml.ReversePBKeyLookupResponse</pre>
xmlns="http://www.pb.com/spectrum/services/ReversePBKeyLookup">
  <output port>
    <Address>
      <Latitude>40.051418</Latitude>
      <Longitude>-105.265424</Longitude>
      <StreetSide>L</StreetSide>
      <Distance></Distance>
      <PercentGeocode>0.0</PercentGeocode>
      <FirmName></FirmName>
      <AddressLine1>2440 Tamarack Ave</AddressLine1>
      <AddressLine2></AddressLine2>
      <LastLine>Boulder, CO 80304-0987</LastLine>
      <AdditionalInputData></AdditionalInputData>
      <Citv>Boulder</Citv>
      <StateProvince>CO</StateProvince>
      <PostalCode.Base>80304</PostalCode.Base>
      <PostalCode.AddOn>0987</PostalCode.AddOn>
      <PostalCode>80304-0987</PostalCode>
      <USUrbanName></USUrbanName>
      <Country>United States of America</Country>
      <LocationCode>AP02</LocationCode>
      <MatchCode>V000</MatchCode>
      <StreetDataType>MASTER LOCATION</StreetDataType>
      <PBKey>P00003PZ8QKG</PBKey>
      <Confidence>96</Confidence>
      <ProcessedBy>KGL</ProcessedBy>
      <Status></Status>
      <Status.Code></Status.Code>
      <Status.Description></Status.Description>
      <user fields />
    </Address>
```

</output_port> </xml.ReversePBKeyLookupResponse>

Request

Input

Reverse PBKey Lookup Input Data

Reverse PBKey Lookup takes a pbKeyTM unique identifier as input. The table below provides information about the format and layout of the input.

Parameter	Format	Description
Data.PBKey	String [13]	12-character plus 1 null character alphanumeric pbKey TM unique identifier.

Input Parameters

The following table lists the options that control ReversePBKeyLookup processing.

Note: As the Enterprise Geocoding Module transitions its administrative tasks to a web-based Management Console, labels for the options may use different wording than what you see in Enterprise Designer. There is no difference in behavior.

Parameter	Description
Option.Dataset	Specifies the database to use to look up the parcel. Use the database name specified in Management Console's Spectrum Databases page.

ReversePBKeyLookup

Parameter	Description		
Option.LatLongFormat	Specifies Decimal Integer	the format for returned latitude/longitude. (90.000000-180.000000) Default. (90000000-18000000)	
Option.OutputCasing	Specifies M	the casing of the output data. Returns the output in mixed case. Default. For example:	
		123 Main St Mytown FL 12345	
	U	Returns the output in upper case. For example:	
		123 MAIN ST MYTOWN FL 12345	
Option.OutputVerbose	as output For exam of the ass	whether Reverse PBKey Lookup provides an additional description field . This field provides the text equivalent to a field represented by a code. ple, LocationCode returns a code that indicates the accuracy (quality) signed geocode. LocationCode. Description provides the on for the code returned.	
	Y	Include verbose fields.	
	Ν	Do not include verbose fields (default)	
Option.OutputRecordType	always re	optional data to include in the output. Note that Reverse PBKey Lookup turns the default data listed in Default Output on page 160. The data you re is returned with the default output data.	
	• C : Cen	sus	
	E: Parsed Elements		
	 L: Latitude/Longitude R: Range 		
	• S : Segment		
	• Q : Qua	lifiers	
	do not wa	of fields included in each record type see Response on page 160. If you int all of the fields in a group returned, do not select the group. Instead, list e fields you want returned in OutputFields.	

Parameter	Description		
Option.OutputFields	Indicates the individual output fields you want returned. List fields with a pipe () between each field. You can use this field instead of the OutputRecordType field to limit the output to the specific fields you want. Default list: AddressLine1 LastLine Longitude Latitude MatchCode LocationCode		

Response

Reverse PBKey Lookup always returns a default set of output fields that contain the address, geocode, and result indicators. For information about these fields, see **Default Output** on page 160. You can also choose to include optional categories of output data.

Default Output

Default Output Fields

Reverse PBKey Lookup always returns these fields in the response; however, the fields may not always be populated.

Response Element	Max. Field Length with null terminator	Description
AdditionalInputData	61	This field may contain input data that was not used for matching; for example, input address information that appears after a mail stop or attention designator.
AddressLine1	104	First line of the address.
AddressLine2	104	Second line of the address.
City	29	Municipality name.

Response Element	Max. Field Length with null terminator	Description
Confidence	4	Indicates the confidence in the output provided. The range is from 0 (zero) to 100, with 0 being no match and 100 being an exact match.
Country	25	The name of the country. Since Reverse PBKey Lookup only works for U.S. locations, this field will always contain United States of America .
Distance	8	The distance, in feet, from the input geocode to nearest matched address or intersection.
FirmName	41	Name of the company.
LastLine	61	Complete last address line (municipality, state, and postal code).
Latitude	11	Seven-digit number in degrees and calculated to 4 decimal places (in the format specified).
LocationCode	5	Indicates the accuracy (quality) of the assigned geocode. For more information, see Address Location Codes on page 196.
		To more mormation, see Address Education obdes on page 190.
Longitude	12	Seven-digit number in degrees and calculated to 4 decimal places (in the format specified).
MatchCode	5	Indicates the portions of the address that matched to the directory file.
		For more information, see Match Codes on page 188.
РВКеу	13	The PBKey that was specified in the input.
PercentGeocode	6	The percent along the street segment that matches the geocode. For example, if the returned geocode falls 1/3 along the way of the entire street segment, the percent is 33.000.
		Note: This value is always 0.0 for matches to point-level data and intersections.

Response Element	Max. Field Length with null terminator	Description	
PostalCode	10	Nine-digit ZIP Code with o	r without a hyphen.
PostalCode.AddOn	5	Four-digit ZIP Code extens	sion.
PostalCode.Base	6	Five-digit ZIP Code.	
ProcessedBy	4	The feature code for the st PBKey Lookup, the value	age that processed the request. For Reverse is KGL.
StateProvince	3	Two-character state abbre	viation.
Status	2	Reports the success or failure of the match attempt	
		null	Success
		F	Failure
Status.Code	23	Reason for failure:	
		Internal System ErrorNo Address FoundInsufficient Input Data	
Status.Description	128	Description of the problem	
		Problem + explanation	Returned when Status.Code = Internal System Error.
		Geocoding Failed	Returned when Status.code = No Address Found.
		No location returned	Returned when Status.code = No Address Found.

Response Element	Max. Field Length with null terminator			
StreetDataType	20	The database that Reverse PI	3Key Lookup attempted to match against.	
SileeiDalaType	20	USPS	USPS	
		TIGER	TIGER	
		томтом	TomTom Streets data set	
		SANBORN POINT DATA	Sanborn Points data set	
		NAVTEQ	NAVTEQ Streets data set	
		TOMTOM POINT DATA	TomTom Points data set	
		AUXILIARY	Auxiliary file	
		CENTRUS POINT DATA	Centrus Points data set	
		USER DICTIONARY	User Dictionary	
		NAVTEQ POINT DATA	NAVTEQ/HERE Points data set	
		MASTER LOCATION	Master Location Data	
StreetSide	2	Indicates the side of the street	the range occupies. One of the following:	
		L The range occup	ies the left side of the street.	
		R The range occup	ies the right side of the street.	
		B The range occup	ies both sides of the street.	
		U Undetermined.		
USUrbanName	6	USPS [®] urbanization name. Puerto Rican addresses only.		

Census

Census output fields contain U.S. Census information about the address. To include census data in the output, set Option.OutputRecordType = C.

Note: These Census output fields - CBSADivisionName, CBSAName, CSAName and USCountyName - are only returned when you set Option.OutputVerbose=Y.

Response Element	Max. Field Length with null terminator	Description	
APN	46	The assessor's parcel number of the property is an ID number assigned to a property by the local property tax authority.	
BlockSuffix	2	Single character block suffix for split Census blocks. Returns A or B. Only available in Centrus Enhanced data.	
CBSACode	6	Indicates Core Based Statistical Area (CBSA).	
CBSADivisionCode	6	Denotes a subdivision of a CBSA.	
CBSADivisionName	128	The name of t the address is	he Core Based Statistical Area (CBSA) division in which located.
		at least 2.5 m of counties ref	on is a metropolitan statistical area with a population of llion that has been subdivided to form smaller groupings erred to as "metropolitan divisions." For more information, tan and Micropolitan Statistical Areas section of the U.S. bu website:
		www.census	gov/population/www/metroareas/metroarea.html
			The CBSA division name is only returned if you set the Option.OutputVerbose=Y.
CBSAMetro	2	Metropolitan S	Statistical Area. Valid values include:
		Y	Metro statistical area
		Ν	Micro statistical area
		null	Data unavailable

Response Element	Max. Field Length with null terminator	Description
CBSAName	128	The name of the core based statistical area (CBSA) in which the address is located.
		A CBSA is a collective term that refers to both metropolitan and micropolitan areas. A metropolitan area has a population of more than 50,000, and a micropolitan area has a population between 10,000 and 49,999. For more information, see <i>Metropolitan and Micropolitan Statistical Areas</i> section of the U.S. Census Bureau website:
		www.census.gov/population/www/metroareas/metroarea.html
		Note: The CBSA name is only returned if you set the option Option.OutputVerbose=Y.
CensusBlockID	16	The ID of the Census Federal Information Processing Standard (FIPS) code.
CensusTract	7	Six digits extracted from the CensusBlockID.
CSACode	4	Denotes the code for a geographic entity that consists of 2 or more adjacent CBSAs with employment interchange measures of at least 15.
CSAName	128	The name of the combined statistical area (CSA) in which the address is located.
		A CSA is a combination of two or more adjacent Core Based Statistical Areas (CBSAs) with a high employment interchange measure. The employment interchange measure is the sum of the percentage of employed residents of the smaller entity who work in the larger entity and the percentage of the employment in the smaller entity. Pairs of CBSAs with employment interchange measures of at least 25% combine automatically. Pairs of CBSAs with employment interchange measures of at least 15%, but less than 25%, may combine if local opinion in both areas favors combination. Note: The CSA name is only returned if you set the option <code>Option.OutputVerbose=Y</code> .

Response Element	Max. Field Length with null terminator	Description
USCountyName	128	The name of the county or parish in which the address is located. Note: The county/parish name is only returned if you set the option Option.OutputVerbose=Y.
USFIPSCountyNumber	4	The three-digit FIPS county code of the county in which the address is located.
USFIPSStateCode	3	The two-digit FIPS state code of the state in which the address is located.
USFIPSStateCountyCode	6	Five-digit FIPS code for state and county extracted from the CensusBlockID.

Latitude/Longitude

The latitude/longitude output fields contain the geographic coordinates of the location. To include latitude/longitude output fields in the output, set Option.OutputRecordType = L.

Response Element	Max. Field Length with null terminator	Description
Latitude	11	7-digit number in degrees and calculated to 4 decimal places (in the format specified).
Longitude	12	7-digit number in degrees and calculated to 4 decimal places (in the format specified).

Postal Data

Postal data output fields contain detailed postal information for the address, such as the preferred city name and the US carrier route. To include postal data fields in the output, set Option.OutputRecordType = P.

Response Element	Max. Field Length with null terminator	Descri	ption	
CityPreferredName	29	The US	The USPS [®] preferred city name for the ZIP Code of the address.	
CityShortName	29	The USPS [®] -approved abbreviation for the city, if there is one. The USPS provides abbreviations for city names that are 14 characters long or longer. City abbreviations are 13 characters or less and can be used when there is limited space on the mailing label. If there is no short ci name for the city, then the full city name is returned.		
CityStateRecordName	29	USPS [®] city state city name.		
DeliveryPointCode	3	Two-dig	it delivery point barcode.	
GovernmentBuilding	2	Indicate	s if a building is used by the city, state, or federal government.	
		Α	City government building	
		в	Federal government building	
		С	State government building	
		D	Firm only	
		Е	City government building and firm only	
		F	Federal government building and firm only	
		G	State government building and firm only	
			ues A, B, C, E, F, and G are valid for Alternate records only. The is valid for both base and alternate records.	
PostalBarCode	7	Six-digit combination of ZIP+4 Code and the delivery point barcode.		

Response Element	Max. Field Length with null terminator	Descripti	ion
PostalCodeClass	2	ZIP Classi	fication code.
		null	Standard ZIP Code
		м	Military ZIP Code
		Р	ZIP Code has P.O. boxes only
		U	Unique ZIP Code (ZIP Code assigned to a single organization)
PostalCodeUnique	2	Indicates if company of	f the ZIP Code is a unique ZIP Code assigned to an individual or agency.
		Y	Unique ZIP name
		null	No unique ZIP name
PostalFacility	2	USPS City	v State Name Facility code.
		Α	Airport Mail Facility (AMF)
		в	Branch
		С	Community Post Office (CPO)
		D	Area Distribution Center (ADC)
		Е	Sectional Center Facility (SCF)
		F	Delivery Distribution Center (DDC)
		G	General Mail Facility (GMF)
		к	Bulk Mail Center (BMC)
		М	Money Order Unit
		Ν	Non-Postal Community Name, Former Postal Facility, or Place Name
		Р	Post Office
		S	Station
		U	Urbanization
USBCCheckDigit	2	Check-digi	it for delivery point barcode.

Spectrum Technology Platform 2019.1.0 Geocoding Guide for United States - REST

Response Element	Max. Field Length with null terminator	Description	
USCarrierRouteCode	5	Carrier	Route code.
USCarrierRouteSort	2		es if the USPS uses a carrier route sort, and what type of sort PS allows.
		Α	Automation cart allowed, optional cart merging allowed
		в	Automation cart allowed, no optional cart merging allowed
		С	No automation cart allowed, optional cart merging allowed
		D	No automation cart allowed, no optional cart merging allowed
USCityDelivery	2	Indicate	es if has city-delivery carrier routes.
		Y	Has city-delivery carrier routes
		Ν	Does not have city-delivery carrier routes.
USLACS	2	Indicate	es if LACS ^{Link} match occurred.
		Y	Matched LACS ^{Link} record
		N	LACS ^{Link} match not found
		F	False-positive LACS ^{Link} record
		S	Secondary information (unit number) removed to make a LACS ^{Link} match
		null	Records not processed through LACS ^{Link}
			re information, see Locatable Address Conversion System on page 21.

Response Element	Max. Field Length with null terminator	Description	n
USLACS.ReturnCode	3	Indicates LACS ^{Link} results.	
		Α	Matched LACS ^{Link} record
		00	LACS ^{Link} match was not found
		09	Matched to highrise default, but noLACS ^{Link} conversion
		14	Found LACS ^{Link} match, but no LACS ^{Link} conversion
		92	Secondary information (unit number) was removed to make a LACS ^{Link} match
		null	Records not processed through LACS ^{Link}
		For more info (LACS) on p	ormation, see Locatable Address Conversion System age 21.
USLOTCode	2	A combination of the 4-digit Line of Travel (LOT) Code and the ascending (A) or descending (D) indicator.	

Qualifiers

The qualifiers output fields contain qualification information about the match, such as the location code and the match code. To include qualifier output fields in the output, set Option.OutputRecordType = Q.

Response Element	Max. Field Length with null terminator	Description
CountryLevel	2	The category of postal data available. Always returns A in Reverse PBKey Lookup—Validates, corrects, and provides missing postal code, city name, state/county name, street address elements, and country name.
DatabaseVersion	15	USPS publish date, in the format Month Year.

Response Element	Max. Field Length with null terminator	Description	
EWSMatch	2	Indicates if Reverse PBKey Lookup denied a match because of E Warning System (EWS) data.	
		Y	EWS denied a match.
		null	EWS did not deny a match.
		For more ir on page 25	formation about EWS, see Early Warning System (EWS)
ExpirationDate	11	Date the database expires, in the format MM/DD/YYYY.	
GeoStanMatchScore	13	Record matching score (for multimatches only).	
Intersection	2	Indicates if ReverseAPNLookup found a cross-street match.	
		т	True, a cross-street match was found.
		F	False, a cross-street match was not found.

Response Element	Max. Field Length with null terminator	Descript	tion
IsAlias	4	Returns 3	PBKey Lookup located a matched record by an index alias. characters. The first is an N for normal street match or A for ch (including buildings, aliases, firms, etc.). The next 2 s are:
		01	Basic index (normal address match)
		02	USPS street name alias index
		03	USPS building index
		04	USPS firm name index
		05	Statewide intersection alias match (when using the Usw.gsi or Use.gsi file)
		06	Spatial data street name alias (when using the Us_pw.gsi, Us_pe.gsi, Us_psw.gsi, or Us_pse.gsi file)
		07	Alternate index (when using Zip9.gsu, Zip9e.gsu, and Zip9w.gsu)
		08	LACS ^{Link}
		09	Auxiliary file match
		10	Centrus Alias index (when using usca.gsi)
		11	POI index (when using poi.gsi)
		12	USPS Preferred Alias
		13	ZIPMove match (when using us.gsz)
		14	Expanded Centroids match (when using us_cent.gsc and/or bldgcent.gsc)
LACSAddress	2		if Reverse PBKey Lookup converted an address due to the Address Conversion System (LACS).
		L	Converted
		null	Not converted
			information about LACS, see Locatable Address Conversion LACS) on page 21.
LocationCode.Description	128		Code converted to text. Only returned when you set the tion options to return additional descriptions (verbose).

Response Element	Max. Field Length with null terminator	Descrip	tion
MatchCode.Description	128	MatchCode converted to text. Only returned when you set the configuration options to return additional descriptions (verbose).	
RecordType	18	Indicates the record type:	
		 Genera HighRis FirmRe Normal PostOff RRHigh 	se cord
RecordType.Default	2	Indicates type of match that occurred for the record type HighRis RRHighwayContract:	
		Y	Default match
		N	Exact match
		U	Not matched
StreetDataCode	3	Indicates	the data used to obtain a match.
		0	USPS data.
		1	TIGER data.
		2	TomTom data.
		6	HERE data.
		7	TomTom point-level data.
		8	Centrus point-level data.
		9	Auxiliary file data.
		10	User Dictionary.
		11	HERE point-level data.
		12	Master Location data.
			information about these databases, see Enterprise Geocoding es on page 5.

Response Element	Max. Field Length with null terminator	Description	
StreetDataType	20	The database that Reverse PBKey Lookup attempted to match again	
		USPS	USPS
		TIGER	TIGER
		ТОМТОМ	TomTom Streets data set
		SANBORN POINT DATA	Sanborn Points data set
		NAVTEQ	NAVTEQ Streets data set
		TOMTOM POINT DATA	TomTom Points data set
		AUXILIARY	Auxiliary file
		CENTRUS POINT DATA	Centrus Points data set
		USER DICTIONARY	User Dictionary
		NAVTEQ POINT DATA	NAVTEQ/HERE Points data set
		MASTER LOCATION	Master Location Data

Range

The range output fields contain information about the street range, such as the high and low unit numbers. To include range data fields in the output, set Option.OutputRecordType = R.

Response Element	Max. Field Length with null terminator	Description	
Alternate	2	SPS code that specifies whether a record is a b Base record. Base records can represen or an individual address, such as a firr	nt a range of addresses n record.
		Alternate record. Alternate records are points.	individual delivery
HouseNumberHigh	12	House number high.	

Response Element	Max. Field Length with null terminator	Description	
HouseNumberLow	12	House number low.	
HouseNumberParity	2	Indicates if the house number range contains even or odd numbers	
		E	Even
		0	Odd
		В	Both
PostalCodeExtensionHigh	5	4-digit ZIP Code exte	ension high.
PostalCodeExtensionLow	5	4-digit Zip Code exte	ension low.
UnitNumberHigh	12	Unit number high.	
UnitNumberLow	12	Unit number low.	
UnitNumberParity	2	Indicates if the unit n	umber range contains even or odd numbers.
		E	Even
		0	Odd
		В	Both

Segment

The segment output fields contain information about the street segment identified by the data provider. To include segment data fields in the output, set Option.OutputRecordType = S.

Response Element	Max. Field Length with null terminator	Description		
BlockLeft	16	Provides the Census FIPS Code that indicates the address is on the left side of the street.		
BlockRight	16	Provides the Census FIPS Code that indicates the address is on the right side of the street.		
BlockSuffixLeft	2	Current left Block suffix for Census 2010 Geography. Returns A or B . Only available in Centrus Enhanced data.		
BlockSuffixRight	2	Current right Block suffix for Census 2010 Geography. Returns A or B . Only available in Centrus Enhanced data.		
RoadClass	3	The type of road:		
		1 The road is a major road.		
		2 The road is a minor road.		
SegmentCode	11	Unique 10-digit segment ID assigned by the street network provider.		
SegmentDirection	2	Indicates the order of numbers on a segment.		
		F Forward		
		R Reversed		
		B Both		
		U Undetermined		
SegmentHouseNumberHigh	12	A high range number in the segment.		
SegmentHouseNumberLow	12	A low range number in the segment.		
SegmentLength		The length, in feet, of a block segment. This field is deprecated.		

Response Element	Max. Field Length with null terminator	Description	
SegmentParity	2	Indicates which side of the street has odd numbers.	
		L	Left side of the street
		R	Right side of the street
		В	Both sides of the street
		U	Undetermined

6 - Geocode US Address Auxiliary Files

Auxiliary File Overview	179
Matching to Auxiliary Files	179
Auxiliary Match Output	181
Auxiliary File Layout	182

In this section

Auxiliary File Overview

Use auxiliary files to match against special data that is not included in the GeocodeUSAddress database.

The GeocodeUSAddress database is updated regularly to incorporate changes made by the USPS and third-party data vendors. You may have newer information that has not yet been incorporated. Auxiliary files provide a way for you to process your input records against a file that includes these changes.

Note: ReverseGeocodeUSAddress does not support auxiliary files.

There are two types of auxiliary file records:

- Street Records—Contains a range of one or more addresses on a street. For required fields, see Auxiliary File Layout on page 182. A street record must not have secondary address information mailstops, Private mail boxes (PMBs), and PO Boxes.
- Landmark Records—Represents a single site. For required fields, see Auxiliary File Layout on page 182. A landmark record must not have street type abbreviations, predirectional and postdirectional abbreviations, or low and high house numbers.

Note: You cannot update the auxiliary file while GeocodeUSAddress is running. If you want to update the auxiliary file, stop GeocodeUSAddress before attempting to replace or edit the file.

Matching to Auxiliary Files

GeocodeUSAddress matches an input address to an auxiliary file as follows:

1. GeocodeUSAddress determines if there is an auxiliary file present.

If you have an auxiliary file in the dataset directory, GeocodeUSAddress automatically loads and attempts to match to the auxiliary file. You can verify that GeocodeUSAddress found an auxiliary file by looking at the version information page in the Management Console. One of the following statuses display:

- Loaded—An auxiliary file is loaded
- None—An auxiliary file has not been found or loaded
- · Invalid—An auxiliary file was found, but failed to successfully load

GeocodeUSAddress only accepts one auxiliary file. If more than one auxiliary files is present, GeocodeUSAddress attempts to match against the first file. GeocodeUSAddress ignores any additional auxiliary files for matching, regardless if GeocodeUSAddress found a match to the first auxiliary file.

If a record in the auxiliary files is invalid, GeocodeUSAddress returns a invalid record message. GeocodeUSAddress continues to match input addresses with the auxiliary file, but will not match to the invalid auxiliary file record.

2. If an auxiliary file is present, GeocodeUSAddress attempts to match to the auxiliary file.

GeocodeUSAddress assumes that the auxiliary file is the most accurate data set and attempts to find a match to the input address in the auxiliary file. If GeocodeUSAddress cannot find a match in the auxiliary file, it matches the input address with the other Enterprise Geocoding Module databases.

Note: GeocodeUSAddress only matches input address lists to auxiliary files if there is an exact match. Your input address list should be free of misspellings and incomplete addresses.

3. If GeocodeUSAddress finds an exact record match to the auxiliary file, it standardizes the match to USPS regulations and returns the output of the auxiliary file match.

GeocodeUSAddress uses the following defaults if you do not include the values in the auxiliary file:

- House number parity = B (both odds and evens)
- Segment direction = A (ascending)
- Side of street = U (unknown)

Record Type Matching Rules

When matching against an auxiliary file, GeocodeUSAddress uses the following rules:

Street record match

- The input house number must fall within or be equal to the low and high house number values of the auxiliary record.
- The input house number must agree with the parity of the auxiliary record.
- The input ZIP Code must exactly match the ZIP Code of the auxiliary record.

Landmark record match

- The input data must contain a ZIP Code and address line, and the values must exactly match the values on the auxiliary record.
- The input address cannot have any other data, such as a house number, unit number, or Private Mail Box (PMB).

Note: GeocodeUSAddress only matches the ZIP Code against the auxiliary file. GeocodeUSAddress does not verify that the ZIP Code of the input address record is correct for the city and state. Validate this information in your input lists before processing against the auxiliary file.

Unavailable Features and Functions

The following features and functions do not apply when GeocodeUSAddress makes an auxiliary file match.

- · GeocodeUSAddress does not match to
- two-line addresses
- multi-line addresses
- intersection addresses
- dual addresses
- GeocodeUSAddress does not perform EWS, ZIPMove, LACSLink, or DPV processing on auxiliary matches
- You can only access the auxiliary file with processing through the Find function. You cannot access the auxiliary file through the Find First/Next or MBR functions
- You can only access the auxiliary file logic using the address code option of the Find function, not the geocode option.

Auxiliary Match Output

GeocodeUSAddress provides special data type, match codes, and location code values for auxiliary matches. When GeocodeUSAddress finds a match to an auxiliary file, the default output follows these conventions:

- GeocodeUSAddress formats the auxiliary file match as a street-style address for output. This excludes PO Boxes, Rural Routes, General Delivery, etc.
- GeocodeUSAddress follows the case setting you indicate (by default, upper case) by the casing function. GeocodeUSAddress does not maintain the casing in the auxiliary file for mixed casing values. For example, GeocodeUSAddress returns O'Donnell as ODONNELL or Odonnell depending on the setting of the casing function.

Note: GeocodeUSAddress does not change the casing for the User Data field.

· GeocodeUSAddress removes spaces at the beginning and ending of fields in the auxiliary file.

Note: GeocodeUSAddress does not remove spaces for the User Data field.

Auxiliary File Layout

You must comply with the following organizational rules when you create auxiliary file:

- Files are fixed-width text files with a .gax extension
- Files can contain up to 500,000 records.
- Use semicolons in the first column to indicate a row is a comment, not a data record; GeocodeUSAddress ignores rows that begin with a semicolon.
- For optimal performance, order the records within the file by descending ZIP Code, and then descending street name.
- Records must represent only one side of a street. To represent both sides of a street, create a record for each side of the street.
- Records must represent segments that are straight lines.
- House numbers must follow USPS rules documented in Publication 28.
- Numeric fields, such as ZIP Codes, must contain only numbers.
- If house numbers are present in the record, the house number range must be valid according to USPS rules documented in Publication 28, Appendix E.
- Latitude and Longitude values must be in millionths of decimal degrees.
- · Records cannot contain PO Box addresses.

The following table shows auxiliary file layout.

Field	Description	Required	for Street	Required for Landmark Match	Match	C	Position
ZIP Code	5-digit ZIP Code.	х	х	х	х	5	1-5
Street name	Name of the street or landmark.	Х	Х	х	х	30	6-35

Field	Description	Required	for Street	Required for Landmark Match	Match	Length	Position
Street type abbreviation	Street type. Also called street suffix. See the USPS Publication 28, Appendix C for a complete list of supported street types.				x	4	36-39
Predirectional	USPS street name predirectional abbreviation. Supported values are N, E, S, W, NE, NW, SE, and SW.				x	2	40-41
Postdirectional	USPS street name postdirectional abbreviations. Supported values are N, E, S, W, NE, NW, SE, and SW.				x	2	42-43
RESERVED	RESERVED					4	44-47
Low house number	Low house number of the address range.	Х	x			11	48-58
High house number	High house number of the address range.	Х	Х			11	59-69
House number parity	Indicates the parity of the house number in the range. E - Even O - Odd					1	70
	B - Both						

Field	Description	Required	for Street	Required for Landmark Match	Match	Length	Position
Segment direction	Direction the house numbers progress along the segment:					1	71
	F - Forward (default) R - Reverse						
RESERVED	RESERVED					1	72
FIPS state	US government FIPS state code.					2	73-74
FIPS county	US government FIPS county code.					3	75-77
Census tract	US Census tract number.					6	78-83
Census block group	US Census block group number.					1	84
Census block ID	US Census block ID number.					3	85-87
RESERVED	RESERVED					5	88-92
State abbreviation	USPS state abbreviation.					2	93-94
County name	Name of the county.					25	95-119
MCD code	Minor Civil Division code.					5	120-124

Field	Description	Required	for Street	Required for Landmark Match	Match	Length	Position
MCD name	Minor Civil Division name.					40	125-164
CBSA code	Core Based Statistical Area code.					5	165-169
CBSA name	Core Based Statistical Area name.					49	170-218
RESERVED	RESERVED					5	219-223
City Name	City name. Overrides the city/state preferred city name upon a return.					40	224-263
RESERVED	RESERVED					237	264-500
User-defined data	User-defined data.					300	501-800
Record ID Number	User-defined unique record identifier.					10	801-810
Side of street	Side of the street for the address:					1	811
	L - Left side						
	R - Right side						
	B - Both sides						
	U - Unknown side (default)						
	This is relative to the segment endpoints and the segment direction.						

Field	Description	Required	for Street	Required for Landmark Match	Match	Length	Position
Beginning longitude	Beginning longitude of the street segment in millionths of degrees.	х	х	х		11	812-822
Beginning latitude	Beginning latitude of the street segment in millionths of degrees.	х	х	x		10	823-832
Ending longitude	Ending longitude of the street segment in millionths of degrees.					11	833-843
Ending latitude	Ending latitude of the street segment in millionths of degrees.					10	844-853

7 - Match and Location Codes for U.S. Geocoding

In this section

Match Codes Location Codes 188 196

Match Codes

The geocoder returns match codes indicating the address portions that matched or did not match to the database.

If the geocoder cannot make a match, the match code begins with "E" and the remaining digits indicate why the address did not match. For the descriptions of the "E" match codes, see Match Codes for No Match - Definitions for "Ennn" return codes on page 194. The digits do not specifically refer to which address elements did not match, but rather why the address did not match.

Match Codes

This section covers:

- Match Code Definitions on page 188
- Definitions for 1st-3rd hex digit match code values on page 190
- Definitions for Extended Match Code (3rd hex digit values) on page 191
- Definitions for the Reverse PBKey Lookup "Vhhh" return codes on page 193
- Match Codes for No Match Definitions for "Ennn" return codes on page 194

Match Code Definitions

The table below contains the match code values.

For descriptions of the hex digits for the match codes, see **Definitions for 1st-3rd hex digit match code values** on page 190.

Code	Description
Ahhh	Same as Shhh, but indicates match to an alias name record or an alternate record.
Chh	The street address did not match, but the geocoder located a street segment based on the input ZIP Code or city .
D00	Matched to a small town with P.O. Box or General Delivery only.

Code	Description				
Ghhh	Matched to an auxiliary file.				
Hhhh	The house number w	vas changed.			
Jhhh	Matched to a user-de	efined dictionary.			
Nxx	Matched to the neare values for N:	est address. Used with reverse geocoding. The following are the only			
	NS0	Nearest street center match (nearest street segment interpolated)			
	NS1	Nearest unranged street segment			
	NP0	Nearest point address			
	NX0	Nearest intersection			
Ρ	Successful reverse A	APN lookup.			
Qhhh		nge records with unique ZIP Codes. CASS rules prohibit altering an s a unique ZIP Code value.			
Rhhh	Matched to a ranged	address.			
Shhh	directly against the U	ata. This is considered the best address match, because it matched SPS list of addresses. S is returned for a small number of addresses ddress has a blank ZIP + 4.			
Thhh	Matched to a street s	segment record.			
Uhhh		ta but cannot resolve the ZIP + 4 code without the firm name or other node returns an $E023$ (multiple match) error code.			
Vhhh		DVDMLDR using Reverse PBKey Lookup. For match code values, the Reverse PBKey Lookup "Vhhh" return codes on page 193.			

Code	Description
Xhhh	Matched to an intersection of two streets, for example, "Clay St & Michigan Ave." The first hex digit refers to the last line information, the second hex digit refers to the first street in the intersection, and the third hex digit refers to the second street in the intersection.
	Note: The USPS does not allow intersections as a valid deliverable address.
Yhhh	Same as Xhhh, but an alias name record was used for one or both streets.
Ζ	No address given, but verified the provided ZIP Code .

Definitions for 1st-3rd hex digit match code values

The table below contains the description of the hex digits for the match code values.

Note: The third hex digit is only populated for intersection matches or as part of the Extended Match Code.

- For intersection matches, use the table below for the 3rd hex digit definitions.
- For Extended Match Code, see **Definitions for Extended Match Code (3rd hex digit** values) on page 191.

Code	In first hex position means:	In second and third hex position means:
0	No change in last line.	No change in address line.
1	ZIP Code changed.	Street type changed.
2	City changed.	Predirectional changed.
3	City and ZIP Code changed.	Street type and predirectional changed.
4	State changed.	Postdirectional changed.

Code	In first hex position means:	In second and third hex position means:
5	State and ZIP Code changed.	Street type and postdirectional changed.
6	State and City changed.	Predirectional and postdirectional changed.
7	State, City, and ZIP Code changed.	Street type, predirectional, and postdirectional changed.
8	ZIP + 4 changed.	Street name changed.
9	ZIP and ZIP + 4 changed.	Street name and street type changed.
A	City and ZIP + 4 changed.	Street name and predirectional changed.
В	City, ZIP, and ZIP + 4 changed.	Street name, street type, and predirectional changed.
С	State and ZIP + 4 changed.	Street name and postdirectional changed.
D	State, ZIP, and ZIP + 4 changed.	Street name, street type, and postdirectional changed.
Е	State, City, and ZIP + 4 changed.	Street name, predirectional, and postdirectional changed.
F	State, City, ZIP, and ZIP + 4 changed.	Street name, street type, predirectional, and postdirectional changed.

Definitions for Extended Match Code (3rd hex digit values)

As mentioned in Match Code on page 60, when Option.ExtendedMatchCode is set to "Y", additional information is returned about any changes in the house number, unit number and unit type fields in the matched address, as well as whether there was address information that was ignored. This additional information is provided in a 3rd hex digit that is appended to match codes

for address-level matches only - A, G, H, J, Q, R, S, T or U (see Match Code Definitions on page 188).

"Address information ignored" is specified when any of these conditions apply:

- The output address has content in the AdditionalInputData field.
- The output address has a second address line (AddressLine2).
- The input address is a dual address (two complete addresses in the input address). For example, "4750 Walnut St. P.O Box 50".
- The input last line has extra information that is not a city, state or ZIP Code, and is ignored. For example, "Boulder, CO 80301 USA", where "USA" is ignored when matching.

The table below provides the descriptions for the Extended Match Code 3rd hex digit return values:

Note: For Auxiliary file matches, the 3rd hex digit is always "0".

Code	In 3rd hex position means:
0	Matched on all address information on line, including Unit Number and Unit Type if included.
1	Matched on Unit Number and Unit Type if included. Extra information on address line ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
2	Matched on Unit Number. Unit Type changed.
3	Matched on Unit Number. Unit Type changed. Extra information on address line ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
4	Unit Number changed or ignored.
5	Unit Number changed or ignored. Extra information on address line ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
6	Unit Number changed or ignored. Unit Type changed or ignored.
7	Unit Number changed or ignored. Unit Type changed or ignored. Extra information on address line ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
8	Matched on Unit Number and Unit Type if included. House Number changed or ignored.

Code	In 3rd hex position means:
9	Matched on Unit Number and Unit Type if included. House Number changed or ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
A	Matched on Unit Number. Unit Type changed. House Number changed or ignored.
В	Matched on Unit Number. Unit Type changed. House Number changed or ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
С	House Number changed or ignored. Unit Number changed or ignored.
D	House Number changed or ignored. Unit Number changed or ignored. Extra information on address line ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.
E	House Number changed or ignored. Unit Number changed or ignored. Unit Type changed or ignored.
F	House Number changed or ignored. Unit Number changed or ignored. Unit Type changed or ignored. Extra information on address line ignored. Extra information not considered for matching moved to AddressLine2 or AdditionalInputData field.

Definitions for the Reverse PBKey Lookup "Vhhh" return codes

The table below lists the "Vhhh" hex digit values returned with Reverse PBKey Lookup. For more information, see **ReversePBKeyLookup** on page 153.

Note: When there are one or more address variations for a Reverse PBKey Lookup, the match code returned is always "V000".

Match Code	Definition
V000	Match made using input pbKey. One Standard or Enhanced point address result returned depending on license.
V001	Match made using input pbKey. Multiple Standard and/or Enhanced point address variations results returned depending on license.
V002	Match made using input pbKey. One Standard, some Enhanced point address variations results returned depending on license.

Match Code	Definition
V003	Match made using input pbKey. Multiple Standard, some Enhanced point address variations results depending on license.

Match Codes for No Match - Definitions for "Ennn" return codes

The table below describes the values returned when the application cannot find a match or an error occurs.

Code	"nnn" values	Description
Ennn		Indicates an error, or no match. This can occur when the address entered does not exist in the database, or the address is badly formed and cannot be parsed correctly. The last three digits of an error code indicate which parts of an address the application could not match to the database.
	nnn = 000	No match made.
	nnn = 001	Low level error.
	nnn = 002	Could not find data file.
	nnn = 003	Incorrect GSD file signature or version ID.
	nnn = 004	GSD file out of date. Only occurs in CASS mode.
	nnn = 010	No city and state or ZIP Code found.
	nnn = 011	Input ZIP not in the directory.
	nnn = 012	Input city not in the directory.
	nnn = 013	Input city not unique in the directory.

Code	"nnn" values	Description
	nnn = 014	Out of licensed area. Only occurs if using Group 1 licensing technology.
	nnn = 015	Record count is depleted and license has expired.
	nnn = 020	No matching streets found in directory.
	nnn = 021	No matching cross streets for an intersection match.
	nnn = 022	No matching segments.
	nnn = 023	Unresolved match.
	nnn = 024	No matching segments. (Same as 022.)
	nnn = 025	Too many possible cross streets for intersection matching.
	nnn = 026	No address found when attempting a multiline match.
	nnn = 027	Invalid directional attempted.
	nnn = 028	Record also matched EWS data, therefore the application denied the match.
	nnn = 029	No matching range, single street segment found.
	nnn = 030	No matching range, multiple street segments found.
	nnn = 040	No match found using input PBKey with ReversePBKeyLookup.

Code	"nnn" values	Description
	nnn = 041	Not licensed to return Enhanced point address(es) found for input PBKey. Additional ReversePBKeyLookup license option required to return results.

Location Codes

Location codes indicate the locational accuracy of the assigned geocode. Note that an accurately placed candidate is not necessarily an ideal candidate. Examine the match codes and/or result codes in addition to location codes to best evaluate the overall quality of the candidate.

A Location Code of "E" indicates a location code is not available. This usually occurs when you have requested ZIP Code centroids of a high quality, and one is not available for that match. It can occur infrequently when the Enterprise Geocoding Module does not have a 5-digit centroid location. The Enterprise Geocoding Module can also return an "E" location code when it cannot standardize an input address and there is no input ZIP Code. In this case, do not assume the ZIP Code returned with the non-standardized address is the correct ZIP Code because the Enterprise Geocoding Module does not return geocoding Module does not return geocoding Module does not return.

Address Location Codes

Location codes that begin with an "A" are address location codes. Address location codes indicate a geocode made directly to a street network segment (or two segments, in the case of an intersection).

An address location code has the following characters.

1 st character	Always an "A" indicating an address location.	
2 nd character	May be one of the following:	
	С	Interpolated address point location
	G	Auxiliary file data location

	Ι	Application infers the correct segment from the candidate records
	Р	Point-level data location
	R	Location represents a ranged address
	S	Location on a street range
	Х	Location on an intersection of two streets
3 rd and 4 th character	Digit indicating other qualities about the location.	

Code		Description
AGn		Indicates an Auxiliary file for a geocode match where n is one of the following values:
	n = 0	The geocode represents the center of a parcel or building.
	n = 1	The geocode is an interpolated address along a segment.
	n = 2	The geocode is an interpolated address along a segment, and the side of the street cannot be determined from the data provided in the auxiliary file record.
	n = 3	The geocode is the midpoint of the street segment.

Table 3: Address Location Codes

Code		Description
APnn		Indicates a point-level geocode match representing the center of a parcel or building, where nn is one of the following values:
	nn = 00	User Dictionary centroid. Geocode returned by a User Dictionary.
	nn = 02	Parcel centroid
		Indicates the center of an accessor's parcel (tract or lot) polygon. When the center of an irregularly shaped parcel falls outside of its polygon, the centroid is manually repositioned to fall inside the polygon as closely as possible to the actual center.
	nn = 04	Address points
		Represents field-collected GPS points with field-collected address data.
	nn = 05	Structure point
		Indicates a location within a building footprint polygon that is associated with the matched address.
		Usually, residential addresses consist of a single building. For houses with outbuildings (detached garages, sheds, barns, etc.), the structure point will typically fall on the primary structure.
		Condominiums and duplexes have multiple, individual addresses and may have multiple structure points for each building. Multi-unit buildings are typically represented by a single structure point associated with the primary/base address, rather than discrete structure points for each unit.
		Shopping malls, industrial complexes, and academic or medical center campuses are commonly represented by a single structure point associated with the primary/base address for the entire complex. When multiple addresses are assigned to multiple buildings within one complex, multiple structure points may be represented within the same complex.

Code		Description
	nn = 07	Manually placed
		Address points are manually placed to coincide with the midpoint of a parcel's street frontage at a distance from the center line.
	nn = 08	Front door point
		Represents the designated primary entrance to a building. If a building has multiple entrances and there is no designated primary entrance or the primary entrance cannot readily be determined, the primary entrance is chosen based on proximity to the main access street and availability of parking.
	nn = 09	Driveway offset point
		Represents a point located on the primary access road (most commonly a driveway) at a perpendicular distance of between 33-98 feet (10-30 meters) from the main roadway.
	nn = 10	Street access point
		Represents the primary point of access from the street network. This address point type is located where the driveway or other access road intersects the main roadway.
	nn = 21	Base parcel point
		When unable to match to an input unit number, or when the unit number is missing from an address location with multiple units, the "base" parcel information is returned, the address is not standardized to a unit number, and additional information, such as an Assessor's Parcel Number, is not returned.
	nn = 22	Backfill address point
		The precise parcel centroid is unknown. The address location assigned is based on two known parcel centroids.

Code		Description
	nn = 23	Virtual address point
		The precise parcel centroid is unknown. The address location assigned is relative to a known parcel centroid and a street segment end point.
	nn = 24	Interpolated address point
		The precise parcel centroid is unknown. The address location assigned is based on street segment end points.
AIn		The correct segment is inferred from the candidate records at match time.
ASn		House range address geocode. This is the most accurate street interpolated geocode available.
Aln, ASn and ACnh sł	nare the same values for the 3 rd cha	racter "n" as follows:
	n = 0	Best location.
	n = 1	Street side is unknown. The Census FIPS Block ID is assigned from the left side; however, there is no assigned offset and the point is placed directly on the street.
	n = 2	Indicates one or both of the following:
		 The address is interpolated onto a TIGER segment that did not initially contain address ranges. The original segment name changed to match the USPS spelling. This specifically refers to street type, predirectional, and postdirectional.
		Note: Only the second case is valid for non-TIGER data because segment range interpolation is only completed for TIGER

data.

Code		Description
	n = 3	Both 1 and 2.
	n = 7	Placeholder. Used when starting and ending points of segments contain the same value and shape data is not available.
ACnh		Indicates a point-level geocode that is interpolated between 2 parcel centroids (points), a parcel centroid and a street segment endpoint, or 2 street segment endpoints.
	The ACnh 4 th cha	aracter "h" values are as follows:
	h = 0	Represents the interpolation between two points, both coming from User Dictionaries.
	h = 1	Represents the interpolation between two points. The low boundary came from a User Dictionary and the high boundary, from a non-User Dictionary.
	h = 2	Represents the interpolation between one point and one street segment end point, both coming from User Dictionaries.
	h = 3	Represents the interpolation between one point (low boundary) and one street segment end point (high boundary). The low boundary came from a User Dictionary and the high boundary from a non-User Dictionary.
	h = 4	Represents the interpolation between two points. The low boundary came from a non-User Dictionary and the high boundary from a User Dictionary.
	h = 5	Represents the interpolation between two points, both coming from non-User Dictionaries.

Code		Description
	h = 6	Represents the interpolation between one point (low boundary) and one street segment end point (high boundary). The low boundary came from a non-User Dictionary and the high boundary from a User Dictionary.
	h = 7	Represents the interpolation between one point and one street segment end point and both came from non-User Dictionaries.
	h = 8	Represents the interpolation between one street segment end point andone point, both coming from User Dictionaries.
	h = 9	Represents the interpolation between one street segment end point (low boundary) andone point (high boundary). The low boundary came from a User Dictionary and the high boundary from a non-User Dictionary.
	h = A	Represents the interpolation between two street segment end points, both coming from User Dictionaries.
	h = B	Represents the interpolation between two street segment end points. The low boundary came from a User Dictionary and the high boundary from a non-User Dictionary.
	h = C	Represents the interpolation between one street segment end point (low boundary) and one point (high boundary). The low boundary came from a non-User Dictionary and the high boundary from a User Dictionary.
	h = D	Represents the interpolation between one street segment end point and one point, both coming from non-User Dictionary.

Code		Description
	h = E	Represents the interpolation between two street segment end points. The low boundary came from a non-User Dictionary and the high boundary from a User Dictionary.
	h = F	Represents the interpolation between two street segment end points, both coming from non-User Dictionaries.
ARn		Ranged address geocode, where "n" is one of the following:
	n = 1	The geocode is placed along a single street segment, midway between the interpolated location of the first and second input house numbers in the range.
	n = 2	The geocode is placed along a single street segment, midway between the interpolated location of the first and second input house numbers in the range, and the side of the street is unknown. The Census FIPS Block ID is assigned from the left side; however, there is no assigned offset and the point is placed directly on the street.
	n = 4	The input range spans multiple USPS segments. The geocode is placed on the endpoint of the segment which corresponds to the first input house number, closest to the end nearest the second input house number.
	n = 7	Placeholder. Used when the starting and ending points of the matched segment contain the same value and shape data is not available.
AXn		Intersection geocode, where n is one of the following:
	n = 3	Standard single-point intersection computed from the center lines of street segments.

Code		Description
	n = 8	Interpolated (divided-road) intersection geocode. Attempts to return a centroid for the intersection.

Street Centroid Location Codes

Location codes that begin with "C" are street centroid location codes. Street centroid location codes indicate the Census ID accuracy and the position of the geocode on the returned street segment. Street centroids may be returned if the street centroid fallback option is enabled and an address-level geocode could not be determined.

A street centroid location code has the following characters.

1 st character	Always "C" indicating a location derived from a street segment.
2 nd character	Census ID accuracy based on the search area used to obtain matching Street Segment.
3 rd character	Location of geocode on the returned street segment.

The table below contains the values and descriptions for the location codes.

Character position	Code	Description
2 nd Character		
	В	Block Group accuracy (most accurate). Based on input ZIP Code.
	Т	Census Tract accuracy. Based on input ZIP Code.

Character position	Code	Description
	С	Unclassified Census accuracy. Normally accurate to at least the County level. Based on input ZIP Code.
	F	Unknown Census accuracy. Based on Finance area.
	P	Unknown Census accuracy. Based on input City.
3 rd Character		
	С	Segment Centroid.
	L	Segment low-range end point.
	Н	Segment high-range end point.

ZIP + 4 Centroid Location Codes

Location codes that begin with a "Z" are ZIP + 4 centroid location codes. ZIP + 4 centroids indicate a geocode could not be determined for the address, so the location of the center of the address's ZIP + 4 was returned instead. ZIP + 4 centroid location codes indicate the quality of two location attributes: Census ID accuracy and positional accuracy.

A ZIP + 4 centroid location code has the following characters.

1 st character	Always " z " indicating a location derived from a ZIP centroid.
2 nd character	Census ID accuracy.

3 rd character	Location type.
4 th character	How the location and Census ID was defined. Provided for completeness, but may not be useful for most applications.

Character Position	Code	Description
2 nd Character		
	В	Block Group accuracy (most accurate).
	Т	Census Tract accuracy.
	С	Unclassified Census accuracy. Normally accurate to at least the County level.
3 rd Character		
	5	Location of the Post Office that delivers mail to the address, a 5-digit ZIP Code centroid, or a location based upon locale (city). See the 4 th character for a precise indication of locational accuracy.
	7	Location based upon a ZIP + 2 centroid. These locations can represent a multiple block area in urban locations, or a slightly larger area in rural settings.

Table 4: ZIP + 4 Centroid Location Codes

Character Position	Code	Description
	9	Location based upon a ZIP + 4 centroid. These are the most accurate centroids and normally place the location on the correct block face. For a small number of records, the location may be the middle of the entire street on which the ZIP + 4 falls. See the 4 th character for a precise indication of locational accuracy.
4 th Character		
	A	Address matched to a single segment. Location assigned in the middle of the matched street segment, offset to the proper side of the street.
	a	Address matched to a single segment, but the correct side of the street is unknown. Location assigned in the middle of the matched street segment, offset to the left side of the street, as address ranges increase.
	В	Address matched to multiple segments, all segments have the same Block Group. Location assigned to the middle of the matched street segment with the most house number ranges within this ZIP + 4. Location offset to the proper side of the street.
	b	Same as methodology B except the correct side of the street is unknown. Location assigned in the middle of the matched street segment, offset to the left side of the street, as address ranges increase.

Character Position	Code	Description
	С	Address matched to multiple segments, with all segments having the same Census Tract. Returns the Block Group representing the most households in this ZIP + 4. Location assigned to t he middle of the matched street segment with the most house number ranges within this ZIP + 4. Location offset to the proper side of the street.
	с	Same as methodology C except the correct side of the street is unknown. Location assigned in the middle of the matched street segment, offset to the left side of the street, as address ranges increase.
	D	Address matched to multiple segments, with all segments having the same County. Returns the Block Group representing the most households in this ZIP + 4. Location assigned to the middle of the matched street segment with the most house number ranges within this ZIP + 4. Location offset to the proper side of the street.
	d	Same as methodology D except the correct side of the street is unknown. Location assigned in the middle of the matched street segment, offset to the left side of the street, as address ranges increase.
	E	Street name matched; no house ranges available. All matched segments have the same Block Group. Location placed on the segment closest to the center of the matched segments. In most cases, this is on the mid-point of the entire street.

Character Position	Code	Description
	F	Street name matched; no house ranges available. All matched segments have the same Census Tract. Location placed on the segment closest to the center of the matched segments. In most cases, this is on the mid-point of the entire street.
	G	Street name matched (no house ranges available). All matched segments have the same County. Location placed on the segment closest to the center of the matched segments. In most cases, this is on the mid-point of the entire street.
	Н	Same as methodology G, but some segments are not in the same County. Used for less than .05% of the centroids.
	I	Created ZIP + 2 cluster centroid as defined by methodologies A, a, B, and b. All centroids in this ZIP + 2 cluster have the same Block Group. Location assigned to the ZIP + 2 centroid.
	J	Created ZIP + 2 cluster centroid as defined by methodologies A, a, B, b, C, and c. All centroids in this ZIP + 2 cluster have the same Census Tract. Location assigned to the ZIP + 2 centroid.
	ĸ	Created ZIP + 2 cluster centroid as defined by methodologies A, a, B, b, C, c, D, and d. Location assigned to the ZIP + 2 centroid.

Character Position	Code	Description
	L	Created ZIP + 2 cluster centroid as defined by methodology E. All centroids in this ZIP + 2 cluster have the same Block Group. Location assigned to the ZIP + 2 centroid.
	М	Created ZIP+2 cluster centroid as defined by methodology E and F. All centroids in this ZIP + 2 cluster have the same Census Tract. Location assigned to the ZIP + 2 centroid.
	Ν	Created ZIP + 2 cluster centroid as defined by methodology E, F, G, and H. Location assigned to the ZIP + 2 centroid.
	0	ZIP Code is obsolete and not currently used by the USPS. Historic location assigned.
	V	Over 95% of addresses in this ZIP Code are in a single Census Tract. Location assigned to the ZIP Code centroid.
	Ψ	Over 80% of addresses in this ZIP Code are in a single Census Tract. Reasonable Census Tract accuracy. Location assigned to the ZIP Code centroid.
	Х	Less than 80% of addresses in this ZIP Code are in a single Census Tract. Census ID is uncertain. Location assigned to the ZIP Code centroid.
	Y	Rural or sparsely populated area. Census code is uncertain. Location based upon the USGS places file.

Character Position	Code	Description
	Ζ	P.O. Box or General Delivery addresses. Census code is uncertain. Location based upon the Post Office location that delivers the mail to that address.

Geographic Centroid Location Codes

Location codes that begin with "G" are geographic centroid location codes. Geographic centroids may be returned if the street centroid fallback option is enabled and an address-level geocode could not be determined. Geographic centroid location codes indicate the quality of a city, county, or state centroid.

A geographic centroid location code has the following characters.

1 st character	Always "G" centroid.	indicating a location derived from a geographic	
2 nd character	Geographic	Geographic area type. One of the following:	
	Μ	Municipality (for example, a city)	
	С	County	
	S	State	

Notices

[®] 2019 Pitney Bowes. All rights reserved. MapInfo and Group 1 Software are trademarks of Pitney Bowes Software Inc. All other marks and trademarks are property of their respective holders.

USPS[®] Notices

Pitney Bowes Inc. holds a non-exclusive license to publish and sell ZIP + 4[®] databases on optical and magnetic media. These trademarks are owned by the United States Postal Service: CASS, CASS Certified, DPV, eLOT, FASTforward, First-Class Mail, Intelligent Mail, LACS^{Link}, NCOA^{Link}, PAVE, PLANET Code, Postal Service, POSTNET, Post Office, RDI, Suite^{Link}, United States Postal Service, Standard Mail, United States Post Office, USPS, ZIP Code, and ZIP + 4. This list is not exhaustive of the trademarks belonging to the Postal Service.

Pitney Bowes Inc. is a non-exclusive licensee of USPS[®] for NCOA^{Link®} processing.

Prices for Pitney Bowes products, options, and services are not established, controlled, or approved by USPS[®] or United States Government. When utilizing RDI[™] data to determine parcel-shipping costs, the business decision on which parcel delivery company to use is not made by the USPS[®] or United States Government.

Data Provider and Related Notices

Data Products contained on this media and used within Pitney Bowes Software applications are protected by various trademarks and by one or more of these copyrights:

© Copyright United States Postal Service. All rights reserved.

© 2014 TomTom. All rights reserved. TomTom and the TomTom logo are registered trademarks of TomTom N.V.

© 2016 HERE Fuente: INEGI (Instituto Nacional de Estadística y Geografía) - Based upon electronic data © National Land Survey Sweden.

© Copyright United States Census Bureau

[©] Copyright Nova Marketing Group, Inc.

Portions of this program are $^{\odot}$ Copyright 1993-2019 by Nova Marketing Group Inc. All Rights Reserved

© Copyright Second Decimal, LLC

[©] Copyright Canada Post Corporation - Data is from a compilation in which Canada Post Corporation is the copyright owner.

© 2007 Claritas, Inc.

The Geocode Address World data set contains data licensed from the GeoNames Project (www.geonames.org) provided under the Creative Commons Attribution License ("Attribution License") located at http://creativecommons.org/licenses/by/3.0/legalcode. Your use of the GeoNames data (described in the Spectrum[™] Technology Platform User Manual) is governed by the terms of the Attribution License, and any conflict between your agreement with Pitney Bowes and the Attribution License will be resolved in favor of the Attribution License solely as it relates to your use of the GeoNames data.



3001 Summer Street Stamford CT 06926-0700 USA

www.pitneybowes.com

© 2019 Pitney Bowes Software Inc. All rights reserved